
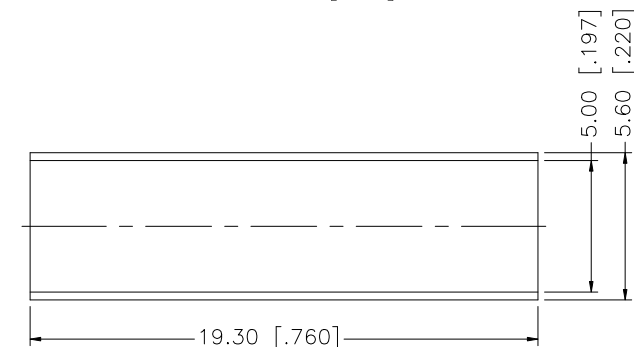
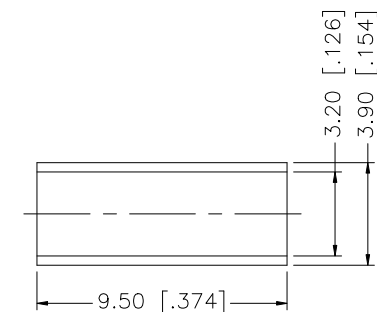

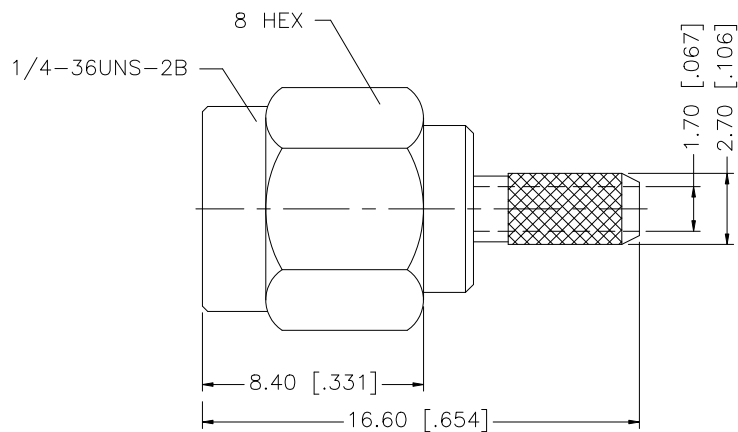


REV.	DATE	ECR NO.	DESCRIPTION
NC	09/18/95	—	INITIAL RELEASE
A	09/03/07	—	MODIFY BODY MATERIALS/UPDATE DIMENSIONS
B	12/29/05	—	UPDATE DRAWING FORMAT
C	07/17/08	—	REVISE BODY MATERIAL TO S.S./ PLATING TO PASSIVATED S.S.

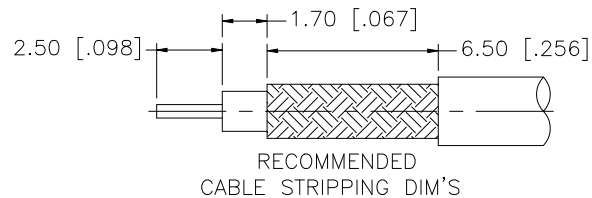

NOTE:

1. CRIMPED FERRULE HEX CRIMP SIZE .128" [3.25]

					UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN MILLIMETERS. DIMENSIONS IN [] ARE IN INCHES AND FOR CUSTOMER REFERENCE ONLY.	APPROVALS	DATE	Amphenol Connex								
8						DRAWN	G.R.S.						07/17/08			
7					UNLESS OTHERWISE SPECIFIED TOLERANCES FOR MILLIMETERS ARE: 0.5 – 8mm ± 0.20mm 8 – 30mm ± 0.40mm 30 – 120mm ± 0.50mm	CHECKED		PART DESCRIPTION SMA CRIMP PLUG (RG–174/U, 188A/U, 316/U)								
6	HEAT SHRINK TUBING			1		ISSUED										
5	FERRULE	COPPER	NICKEL	1	UNLESS OTHERWISE SPECIFIED TOLERANCES FOR INCHES ARE: .020 – .315 = ± 0.007” .315 – 1.180 = ± 0.015” 1.180 – 4.724 = ± 0.020”	SHEET	1 OF 1	PART NO. 132114SS								
4	CONTACT PIN	BRASS	GOLD	1												
3	INSULATOR	PTFE	NATURAL	1	DO NOT SCALE DRAWING	CAD FILE C:/132/132114SS.DWG		DWG. NO.		132114SS.DWG	REV.	C	SIZE	A	SCALE	NA
2	COUPLING NUT	STAINLESS STEEL	PASSIVATED S.S.	1												
1	BODY	STAINLESS STEEL	PASSIVATED S.S.	1												
	DESCRIPTION	MATERIAL	FINISH	QTY												