
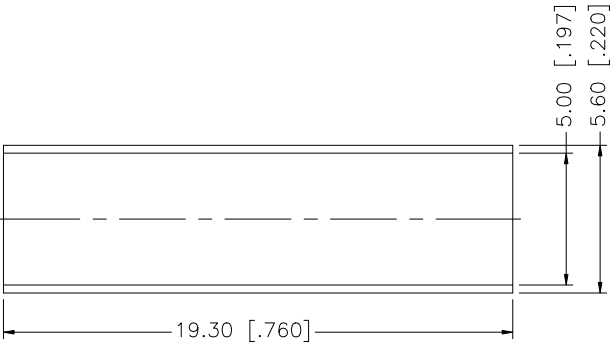
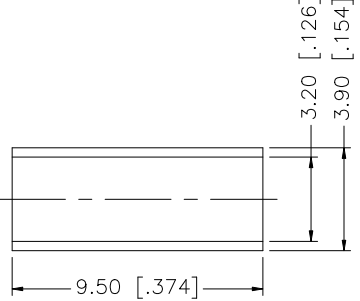

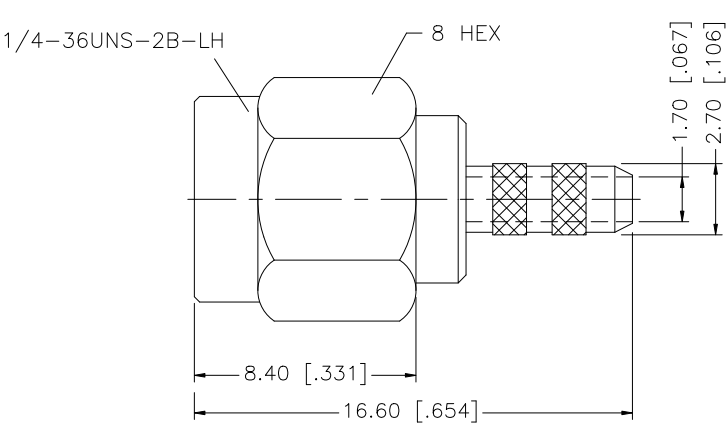


REV.	DATE	DESCRIPTION
NC	07/12/07	INITIAL RELEASE

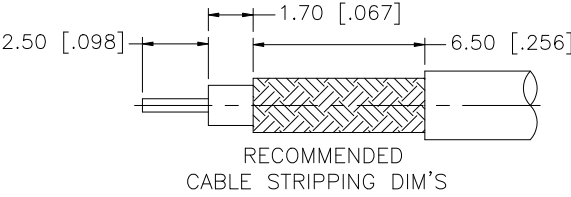

NOTE:
1. CRIMPED FERRULE HEX CRIMP SIZE .128"

8					UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN MILLIMETERS. DIMENSIONS IN [] ARE IN INCHES AND FOR CUSTOMER REFERENCE ONLY. UNLESS OTHERWISE SPECIFIED TOLERANCES FOR MILLIMETERS ARE: 0.5 – 8mm ± 0.20mm 8 – 30mm ± 0.40mm 30 – 120mm ± 0.50mm UNLESS OTHERWISE SPECIFIED TOLERANCES FOR INCHES ARE: .020 – .315 = ± 0.007" .315 – 1.180 = ± 0.015" 1.180 – 4.724 = ± 0.020"	APPROVALS	DATE	Amphenol Connex									
7						DRAWN	G.R.S.								07/12/07		
6						CHECKED			PART DESCRIPTION SMA CRIMP PLUG, REVERSE THREAD (RG-174/U, 188/U, 316/U)								
5	HEAT SHRINK TUBING			1		ISSUED											
4	FERRULE	COPPER	GOLD	1		SHEET	1 OF 1		PART NO. 132114RT								
3	CONTACT PIN	BRASS	GOLD	1													
2	INSULATOR	TEFLON	NATURAL	1				DWG. NO.		132114RT.DWG		REV.	NC	SIZE	A	SCALE	NA
1	BODY	BRASS	GOLD	1													
DESCRIPTION					MATERIAL	FINISH	QTY	DO NOT SCALE DRAWING		C:/132/132114RT.DWG							