





REV.	DATE	ECR NO.	DESCRIPTION
NC	02/05/09	—	INITIAL RELEASE

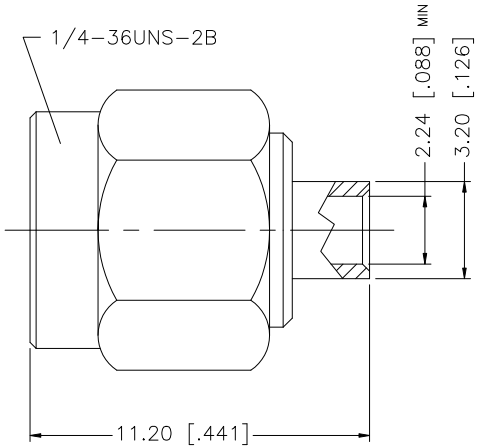

					UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN MILLIMETERS. DIMENSIONS IN [] ARE IN INCHES AND FOR CUSTOMER REFERENCE ONLY.	APPROVALS	DATE	Amphenol Connex			
8					UNLESS OTHERWISE SPECIFIED TOLERANCES FOR MILLIMETERS ARE: 0.5 – 8mm ± 0.20mm 8 – 30mm ± 0.40mm 30 – 120mm ± 0.50mm	DRAWN GRS	02/05/09				
7					UNLESS OTHERWISE SPECIFIED TOLERANCES FOR INCHES ARE: .020 – .315 = ± 0.007" .315 – 1.180 = ± 0.015" 1.180 – 4.724 = ± 0.020"	CHECKED		PART DESCRIPTION SMA SEMI-RIGID PLUG (FOR .085", .086" SEMI-RIGID CABLE)			
6						ISSUED					
5	INSULATOR	PTFE	NATURAL	1		SHEET 1 OF 1		PART NO. 132101SS			
4	CONTACT PIN	BRASS	GOLD	1							
3	INSULATOR	PTFE	NATURAL	1				DWG. NO. 132101SS			
2	SHELL	S.S.	PASSIVATED S.S.	1							
1	BODY	S.S.	PASSIVATED S.S.	1				REV. NC			
	DESCRIPTION	MATERIAL	FINISH	QTY	DO NOT SCALE DRAWING	CAD FILE C:/132/132101SS.DWG					
								SIZE A	SCALE NA		