
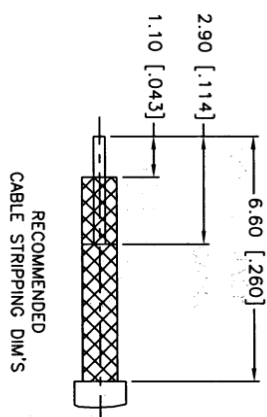
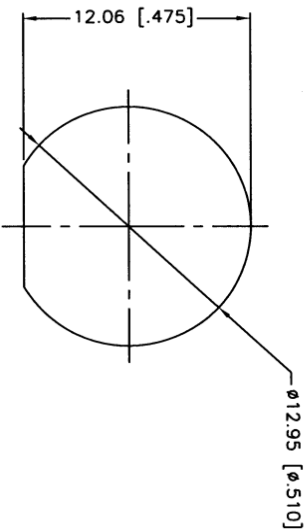
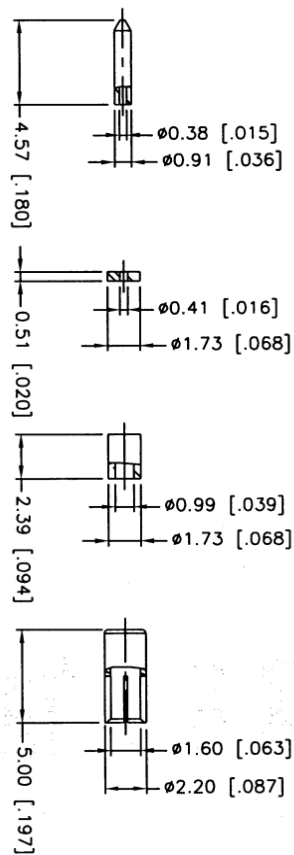


REV.	DATE	ECR NO.	DESCRIPTION
NC	01/07/'10	XXXXXX	INITIAL RELEASE

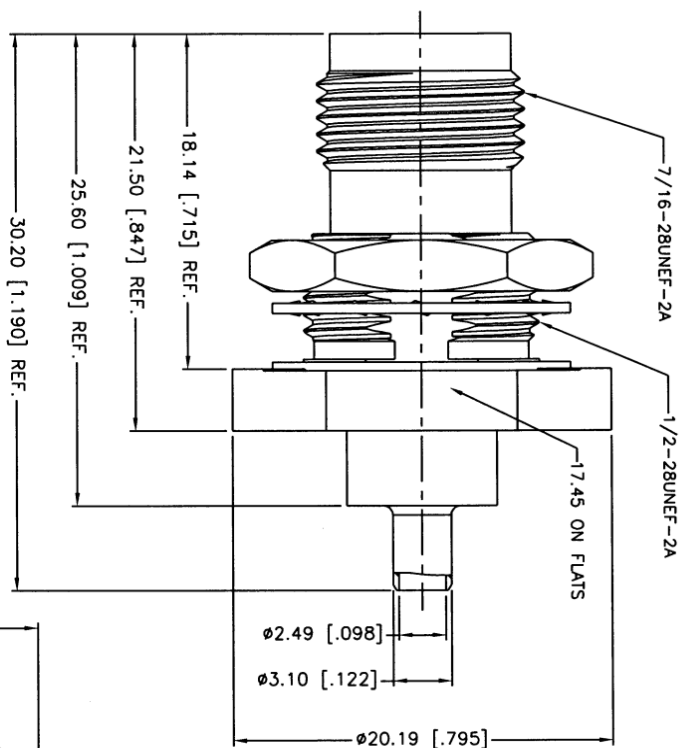

- NOTES:
1. CRIMPED FERRULE
HEX CRIMP SIZE .105"
 2. SOLDER CENTER CONTACT
 3. MAX. PANEL THICKNESS=3MM

2. SOLDER CENTER CONTACT 3. MAX. PANEL THICKNESS=3MM												
11	INNER FERRULE	BRASS	NICKEL	1	UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN MILLIMETERS (DIMENSIONS IN [] ARE IN INCHES AND FOR CUSTOMER REFERENCE ONLY). UNLESS OTHERWISE SPECIFIED TOLERANCES FOR MILLIMETERS ARE: 0.5 - 8mm ± 0.20mm 8 - 30mm ± 0.40mm 30 - 120mm ± 0.50mm UNLESS OTHERWISE SPECIFIED TOLERANCES FOR INCHES ARE: .020 - .315 ± 0.007" .315 - 1.180 ± 0.015" 1.180 - 4.724 ± 0.020"	DO NOT SCALE DRAWING	CAD FILE C:/CONNEX/122532.DWG	DWG. NO. 122532.DWG	REV. NC	SIZE A	SCALE NA	
10	SLEEVE	BRASS	NICKEL	1								
9	INSULATOR	PTE	NATURAL	1								
8	CONTACT PIN	BRASS	GOLD	1								
7	HEX NUT	BRASS	NICKEL	1								
6	LOCK WASHER	PHOSPHOR BRONZE	NICKEL	1								
5	CONTACT PIN	PHOSPHOR BRONZE	GOLD	1								
4	GASKET	SILICONE	RED	1								
3	BODY	BRASS	NICKEL	1								
2	INSULATOR	PTE	NATURAL	1								
1	BARREL	BRASS	NICKEL	1								
DESCRIPTION					MATERIAL		FINISH		QTY			
Amphenol Connex TNC BULKHEAD JACK (FOR 1.37 MM CABLE) 122532												