
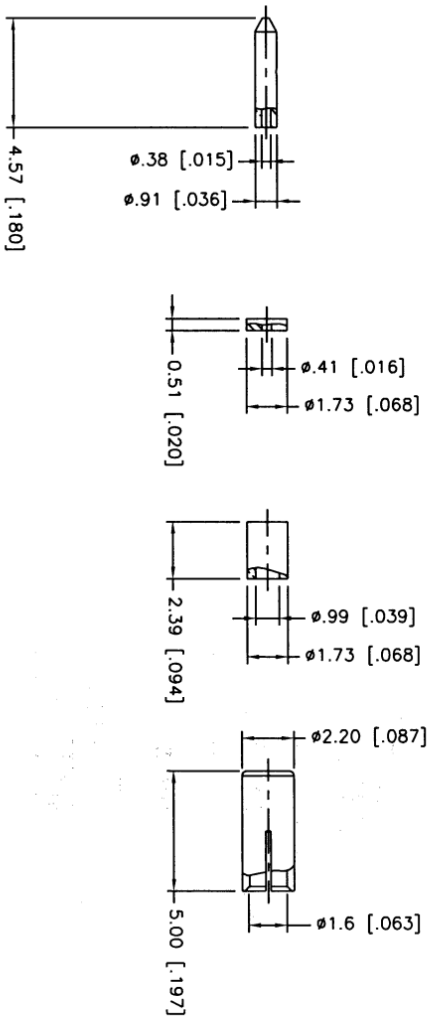


**RECOMMENDED
CABLE STRIPPING DIM'S**

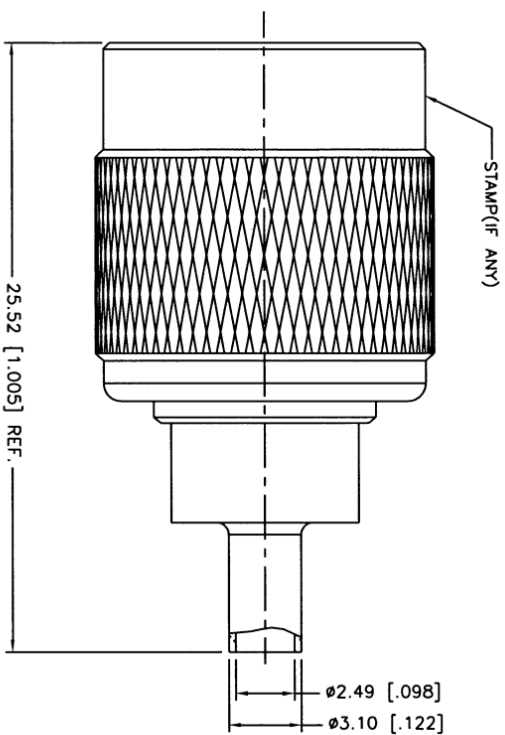

13	INNER FERRULE	BRASS	NICKEL	1
12	SLEEVE	BRASS	NICKEL	1
11	INSULATOR	PTFE	NATURAL	1
10	CONTACT PIN	BRASS	GOLD	1
9	GASKET	RUBBER	RED	1
8	RETAINER RING	BRASS	NICKEL	1
7	RING	DELTRIN	NATURAL	1
6	WASHER	BRASS	NICKEL	1
5	CONTACT PIN	PHOSPHOR BRONZE	GOLD	1
4	INSULATOR	PTFE	NATURAL	1
3	BODY	BRASS	NICKEL	1
2	SHELL	BRASS	NICKEL	1
1	BODY	BRASS	NICKEL	1
	DESCRIPTION	MATERIAL	FINISH	QTY

UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN MILLIMETERS. DIMENSIONS IN () ARE IN INCHES AND FOR CUSTOMER REFERENCE ONLY.

FRANCIS & TAYLOR

8 - 30mm $\pm$ 0.40mm
30 - 120mm $\pm$ 0.50mm

ALL PRICES FOR INCHES ARE:

$$\begin{aligned} .020 - .315 &= \pm 0.007 \\ .315 - 1.180 &= \pm 0.015 \\ 1.180 - 4.724 &= \pm 0.020 \end{aligned}$$

DO NOT SCALE DRAWING

APPROVALS	DATE
DRAWN M. ZHANG	01/07/10
CHECKED	
ISSUED	
SHEET 1 OF 1	

Amphenol Connex

TNC PLUG FOR 1.37MM CABLE

122530

DWG. NO.	122530 .DWG	REV.	NC	SIZE	A	SCALE	NA
----------	-------------	------	----	------	---	-------	----

NOTES:

1. CRIMPED FERRULE
HEX CRIMP SIZE .105"
2. SOLDER CENTER CONTACT