

RECOMMENDED
CABLE STRIPPING DIM'S



Technical drawings of four mechanical parts (a, b, c, d) with dimensions in inches and brackets indicating tolerances.

Part (a): A small cylindrical part with a total length of 0.76 [.030]. It has a central hole with a diameter of 0.74 [.029] and a smaller hole with a diameter of 0.73 [.068].

Part (b): A cylindrical part with a total length of 5.80 [.229]. It has a central hole with a diameter of 0.40 [.016].

Part (c): A cylindrical part with a total length of 2.13 [.084]. It has a central hole with a diameter of 0.74 [.029] and a smaller hole with a diameter of 0.73 [.068].

Part (d): A cylindrical part with a total length of 5.00 [.197]. It has a central hole with a diameter of 1.22 [.048] and a smaller hole with a diameter of 2.21 [.087].

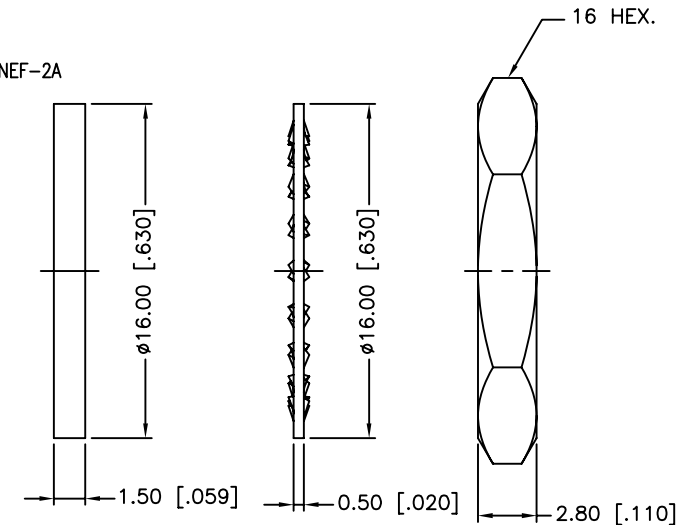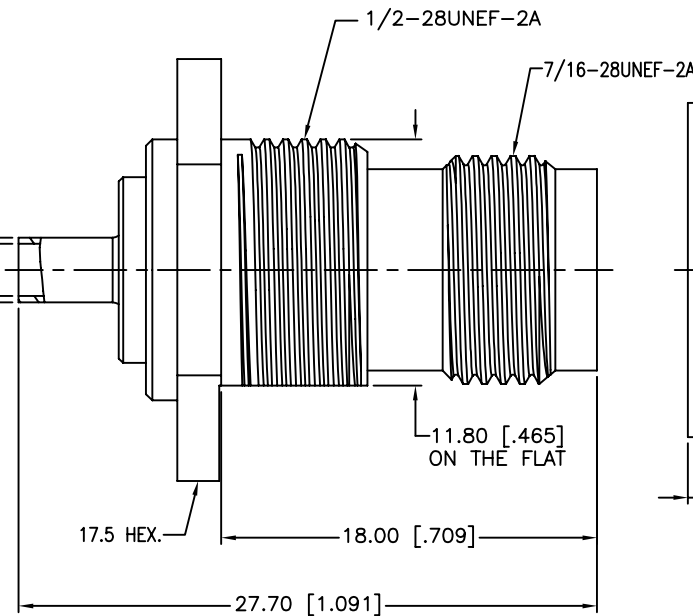

1. CRIMPED FERRULE
HEX CRIMP SIZE .105"
2. SOLDER CENTER CONTACT

UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE
IN MILLIMETERS. DIMENSIONS IN [] ARE IN
INCHES AND FOR CUSTOMER REFERENCE ONLY.

UNLESS OTHERWISE SPECIFIED
TOLERANCES FOR MILLIMETERS ARE:

0.5 - 8mm	± 0.20mm
8 - 30mm	± 0.40mm
30 - 120mm	± 0.50mm

UNLESS OTHERWISE SPECIFIED
TOLERANCES FOR INCHES ARE:

.020 - .315	= ± 0.007"
.315 - 1.180	= ± 0.015"
1.180 - 4.724	= ± 0.020"

DO NOT SCALE DRAWING

Amphenol Connex

[illegible]

TNC BULKHEAD CRIMP JACK
(FOR 1.13 MM CABLE)

	PART NO.
--	----------

122526

DWG. NO.	
----------	--

122526.DWG

REV.	NC
------	----

SIZE	A
------	---

SCALE	NA
-------	----