

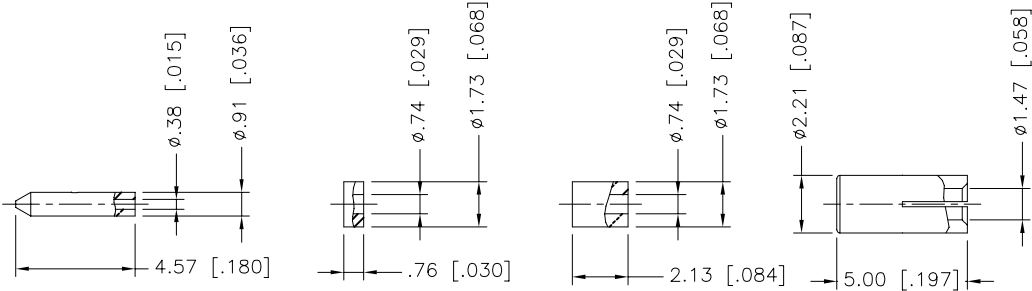


REV.	DATE	ECR NO.	DESCRIPTION
NC	06/02/09	XXXXXX	INITIAL RELEASE

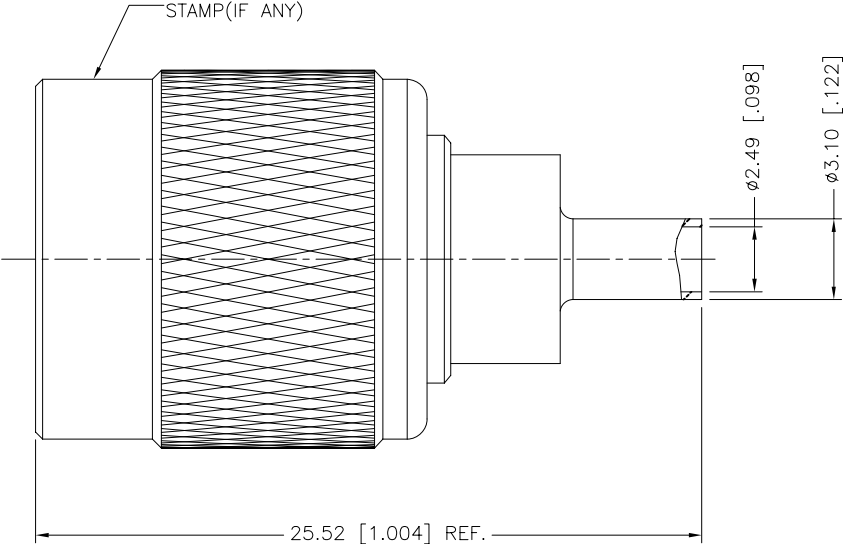

RECOMMENDED
CABLE STRIPPING DIM'S

13	INNER FERRULE	BRASS	NICKEL	1
12	SLEEVE	BRASS	NICKEL	1
11	INSULATOR	PTFE	NATURAL	1
10	CONTACT PIN	BRASS	GOLD	1
9	GASKET	RUBBER	RED	1
8	RETAINER RING	BRASS	NICKEL	1
7	RING	DELTRIN	NATURAL	1
6	WASHER	BRASS	NICKEL	1
5	CONTACT PIN	PHOSPHOR BRONZE	GOLD	1
4	INSULATOR	PTFE	NATURAL	1
3	BODY	BRASS	NICKEL	1
2	SHELL	BRASS	NICKEL	1
1	BODY	BRASS	NICKEL	1
	DESCRIPTION	MATERIAL	FINISH	QTY

UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN MILLIMETERS. DIMENSIONS IN [] ARE IN INCHES AND FOR CUSTOMER REFERENCE ONLY.

UNLESS OTHERWISE SPECIFIED TOLERANCES FOR MILLIMETERS ARE:
0.5 - 8mm ± 0.20mm
8 - 30mm ± 0.40mm
30 - 120mm ± 0.50mm

UNLESS OTHERWISE SPECIFIED TOLERANCES FOR INCHES ARE:
.020 - .315 = ± 0.007"
.315 - 1.180 = ± 0.015"
1.180 - 4.724 = ± 0.020"

DO NOT SCALE DRAWING

APPROVALS	DATE
DRAWN J.CHENG	06/02/09
CHECKED	
ISSUED	
SHEET 1 OF 1	
CAD FILE C:/CONNEX/122527.DWG	

Amphenol Connex			
PART DESCRIPTION			
TNC PLUG FOR 1.32MM CABLE			
PART NO.			
122527			
DWG. NO.	122527.DWG	REV.	NC
SIZE	A	SCALE	NA

- NOTES:
1. CRIMPED FERRULE
HEX CRIMP SIZE .105"
 2. SOLDER CENTER CONTACT