
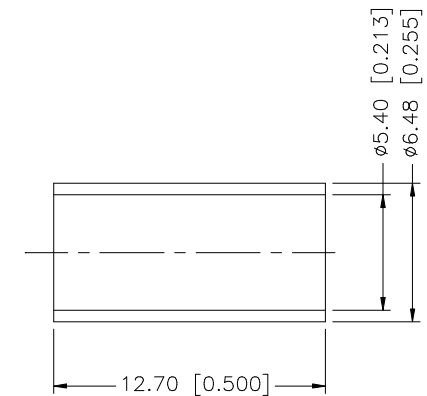
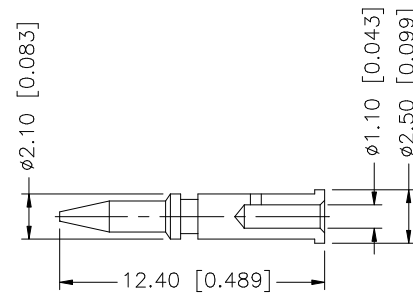
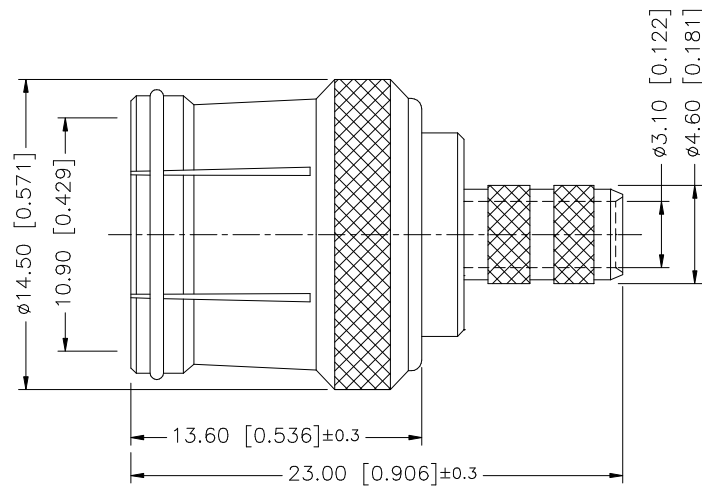


REV.	DATE	DESCRIPTION
NC	09/18/06	INITIAL RELEASE

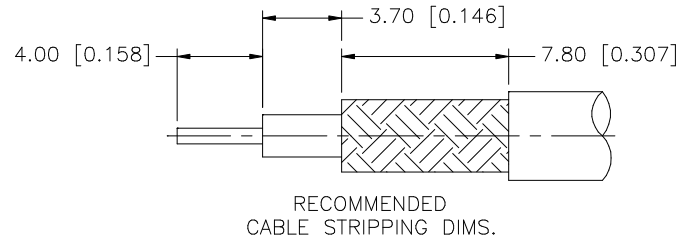

NOTE:

1. CRIMPED FERRULE
HEX CRIMP SIZE .216"
2. CRIMPED CONTACT PIN
HEX CRIMP SIZE .068"

					UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN MILLIMETERS. DIMENSIONS IN [] ARE IN INCHES AND FOR CUSTOMER REFERENCE ONLY. UNLESS OTHERWISE SPECIFIED TOLERANCES FOR MILLIMETERS ARE: 0.5 – 8mm ± 0.20mm 8 – 30mm ± 0.40mm 30 – 120mm ± 0.50mm UNLESS OTHERWISE SPECIFIED TOLERANCES FOR INCHES ARE: .020 – .315 = ± 0.007” .315 – 1.180 = ± 0.015” 1.180 – 4.724 = ± 0.020” DO NOT SCALE DRAWING	APPROVALS		DATE		Amphenol Connex								
8						DRAWN	G.R.S.	09/18/06										
7						CHECKED				PART DESCRIPTION TNC PUSH-ON / CRIMP PLUG (FOR 58/U CABLE)								
6						ISSUED												
5						SHEET	1 OF 1				PART NO. 122518							
4	FERRULE	COPPER	NICKEL	1	CAD FILE		C:/122/122518.DWG		DWG. NO.							122518.DWG		REV.
3	CONTACT PIN	BRASS	GOLD	1														
2	INSULATOR	TEFLON	NATURAL	1														
1	BODY	BRASS	NICKEL	1														
	DESCRIPTION	MATERIAL	FINISH	QTY														