

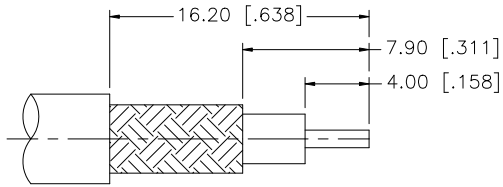
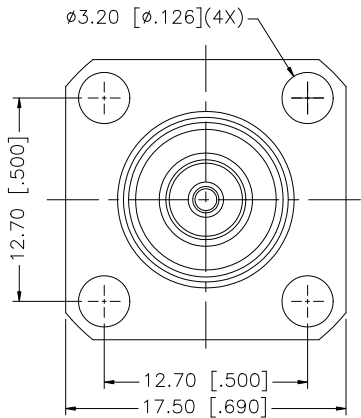
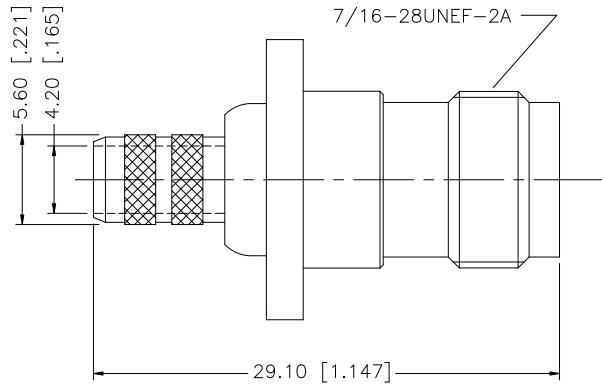


REV.	DATE	DESCRIPTION
NC	08/21/07	INITIAL RELEASE



RECOMMENDED
CABLE STRIPPING DIM'S



					UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN MILLIMETERS. DIMENSIONS IN [] ARE IN INCHES AND FOR CUSTOMER REFERENCE ONLY. UNLESS OTHERWISE SPECIFIED TOLERANCES FOR MILLIMETERS ARE: 0.5 – 8mm ± 0.20mm 8 – 30mm ± 0.40mm 30 – 120mm ± 0.50mm UNLESS OTHERWISE SPECIFIED TOLERANCES FOR INCHES ARE: .020 – .315 = ± 0.007” .315 – 1.180 = ± 0.015” 1.180 – 4.724 = ± 0.020”	APPROVALS		DATE		Amphenol Connex				
8						DRAWN	G.R.S.	08/21/07						
7						CHECKED			PART DESCRIPTION TNC PANEL CRIMP JACK (FOR LMR 240/8X CABLE)					
6						ISSUED								
5						SHEET	1 OF 1			PART NO. 122523				
4	FERRULE	BRASS	NICKEL	1	CAD FILE			DWG. NO. 122523.DWG						
3	CONTACT PIN	PHOS. BRONZE	GOLD	1	C:/122/122523.DWG								REV.	NC
2	INSULATOR	TEFLON	NATURAL	1	DO NOT SCALE DRAWING									
1	BODY	BRASS	NICKEL	1										
	DESCRIPTION	MATERIAL	FINISH	QTY										