

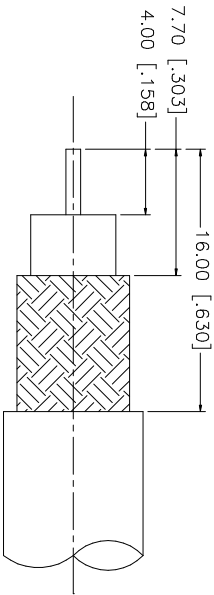



DESCRIPTION		
REV.	DATE	
NC	11/02/05	INITIAL RELEASE
A	12/21/05	REVISE PRODUCT DESCRIPTION/ ADD CRIMP NOTES




RECOMMENDED CABLE STRIPPING DIMENSIONS

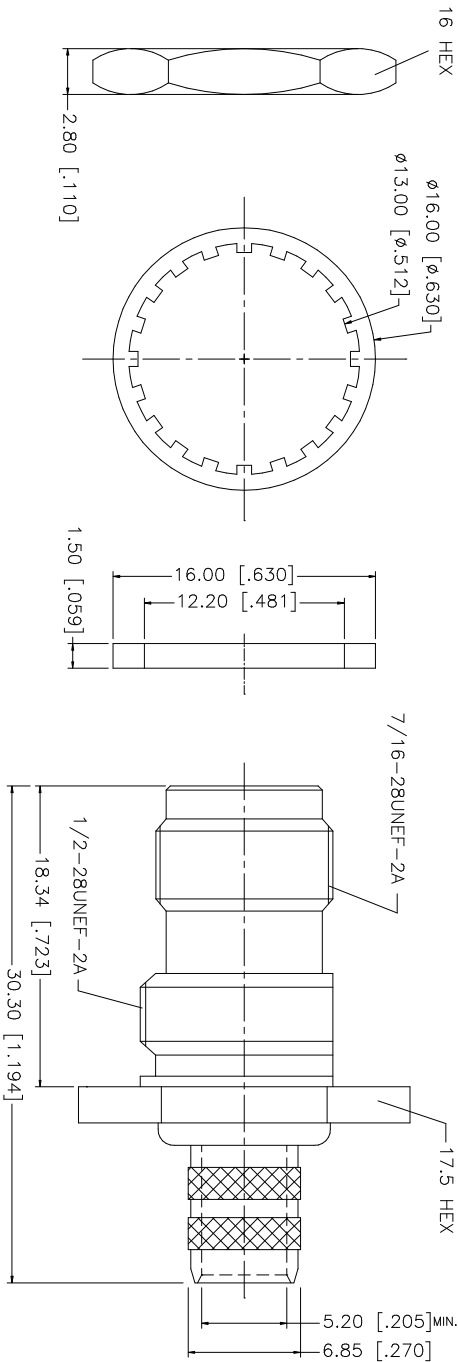

NOTE:

1. CRIMPED FERRULE
HEX CRIMP SIZE .324"
2. CRIMPED CONTACT PIN
HEX CRIMP SIZE .068"

RECOMMENDED MOUNTING HOLE



UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN MILLIMETERS. DIMENSIONS IN [] ARE IN INCHES AND FOR CUSTOMER REFERENCE ONLY.		
UNLESS OTHERWISE SPECIFIED TOLERANCES FOR MILLIMETERS ARE:		
0.5 - 8mm ± 0.20mm	8 - 30mm ± 0.40mm	30 - 120mm ± 0.50mm
UNLESS OTHERWISE SPECIFIED TOLERANCES FOR INCHES ARE:		
.020 - .315 ± 0.007"	.315 - 1.180 ± 0.015"	1.180 - 4.724 ± 0.020"
DO NOT SCALE DRAWING		
APPROVALS		DATE
DRAWN	G.R.S.	12/21/05
CHECKED		
ISSUED		
SHEET	1 OF 1	
PART DESCRIPTION		PART NO.
TNC BULKHEAD CRIMP JACK (FOR B8281 CABLE)		122512
DWG. NO.		122512.DWG
REV. A		SIZE A
SCALE		NA