
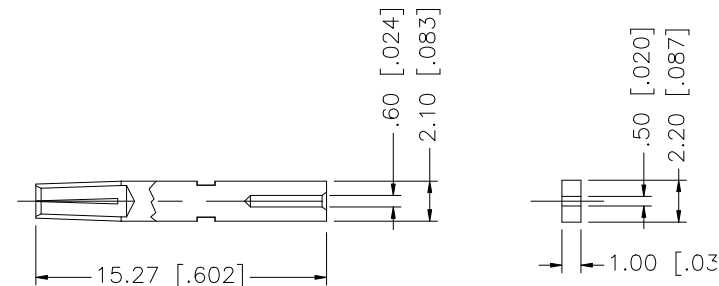
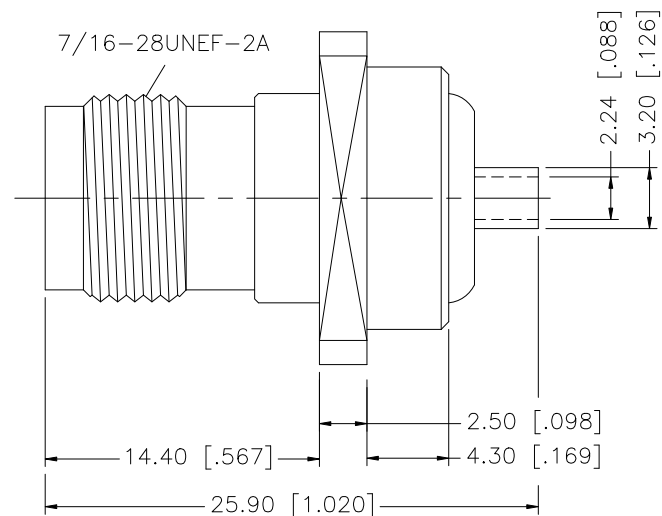
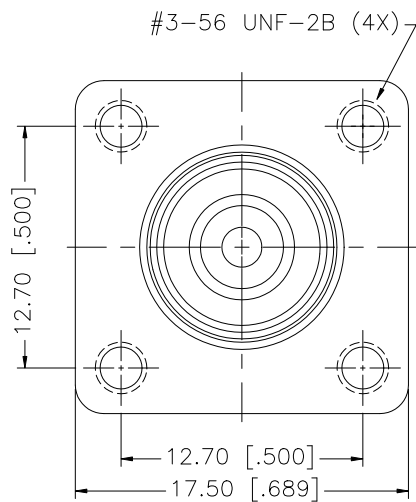
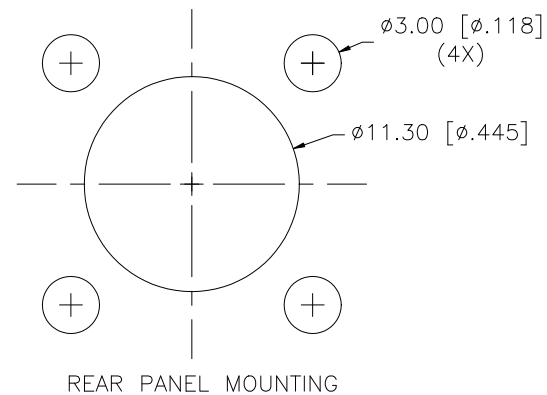
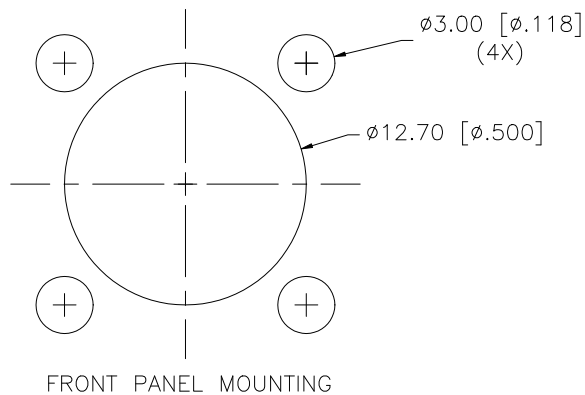


A	12/20/05	REVISE PART DESCRIPTION
B	11/04/07	ADD PANEL MOUNTING DIMENSIONS

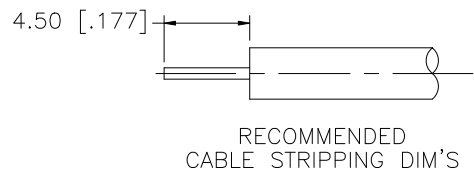

NOTES:
1. CRIMPED CONTACT PIN HEX CRIMP SIZE .068"

					UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN MILLIMETERS. DIMENSIONS IN [] ARE IN INCHES AND FOR CUSTOMER REFERENCE ONLY.	APPROVALS	DATE	Amphenol Connex								
8						DRAWN	G.R.S.					11/04/07				
7						CHECKED										
6					UNLESS OTHERWISE SPECIFIED TOLERANCES FOR MILLIMETERS ARE: 0.5 – 8mm ± 0.20mm 8 – 30mm ± 0.40mm 30 – 120mm ± 0.50mm	ISSUED		PART DESCRIPTION TNC PANEL CABLE JACK (FOR .085” SEMI RIGID CABLE)								
5					UNLESS OTHERWISE SPECIFIED TOLERANCES FOR INCHES ARE: .020 – .315 = ± 0.007” .315 – 1.180 = ± 0.015” 1.180 – 4.724 = ± 0.020”	SHEET	1 OF 1									
4	CONTACT PIN	PHOS. BRONZE	GOLD	1												
3	INSULATOR	TEFLON	NATURAL	1				PART NO. 122513								
2	BARREL	BRASS	GOLD	1												
1	BODY	BRASS	NICKEL	1												
	DESCRIPTION	MATERIAL	FINISH	QTY		CAD FILE	C:/122/122513.DWG		DWG. NO.		122513.DWG	REV.	B	SIZE	A	SC/
					DO NOT SCALE DRAWING											