

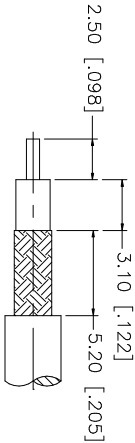





REV.	DATE	DESCRIPTION
NC	01/24/06	INITIAL RELEASE

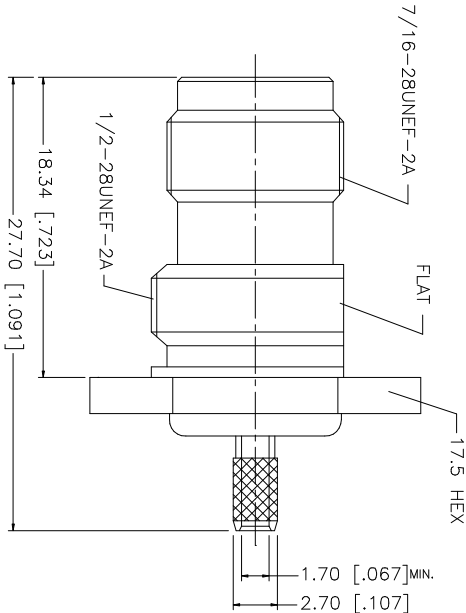

RECOMMENDED
CABLE STRIPPING DIM'S

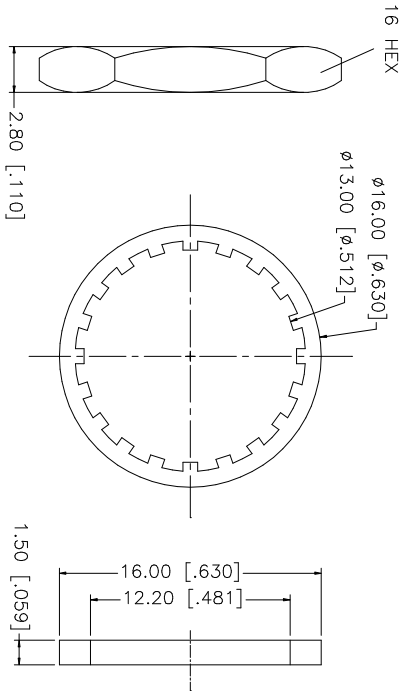

RECOMMENDED
MOUNTING HOLE

					UNLESS OTHERWISE SPECIFIED, DIMENSIONS ARE IN MILLIMETERS. DIMENSIONS IN [] ARE IN INCHES AND FOR CUSTOMER REFERENCE ONLY.	APPROVALS	DATE	Amphenol Connex TNC BULKHEAD CRIMP JACK PIN-IN-PIN (FOR RG-174/U, 188A/U, 316/U CABLE)
8	FERRULE	COPPER	NICKEL	1	UNLESS OTHERWISE SPECIFIED, TOLERANCES FOR MILLIMETERS ARE: 0.5 - 8mm ± 0.20mm 8 - 30mm ± 0.40mm 30 - 120mm ± 0.50mm	DRAWN G.R.S.	01/24/06	
7	HEX NUT	BRASS	NICKEL	1	UNLESS OTHERWISE SPECIFIED, TOLERANCES FOR INCHES ARE: .020 - .315 = ± 0.007" .315 - 1.180 = ± 0.015" 1.180 - 4.724 = ± 0.020"	CHECKED		
6	LOCK WASHER	BRASS	NICKEL	1		ISSUED		
5	GASKET	RUBBER	RED	1		SHEET 1 OF 1		
4	CONTACT PIN	PHOS. BRONZE	GOLD	1				PART NO. 122514
3	INSULATOR	TEFLON	NATURAL	1				
2	BODY/HOUSING	BRASS	NICKEL	1				
1	DESCRIPTION	MATERIAL	FINISH	QTY	DO NOT SCALE DRAWING	CAD FILE C:/122/122514.DWG	DWG. NO. 122514.DWG	REV. NC SIZE A SCALE NA