

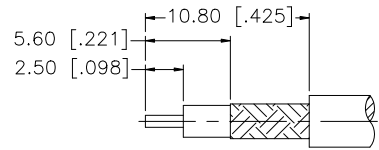





REV.	DATE	ECR NO.	DESCRIPTION
NC	03/09/09	—	INITIAL RELEASE



RECOMMENDED
CABLE STRIPPING DIM'S

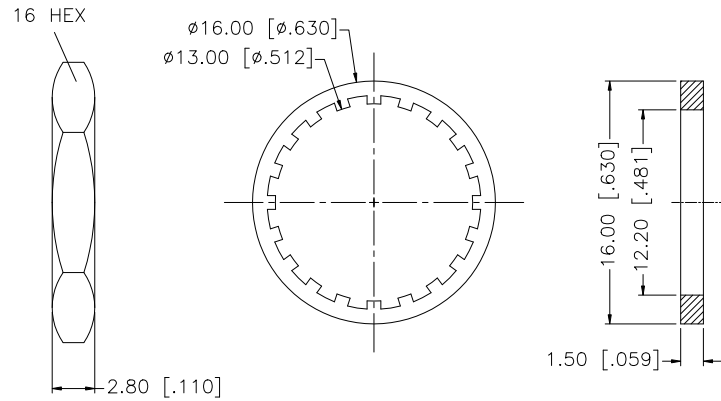

RECOMMENDED
MOUNTING HOLE

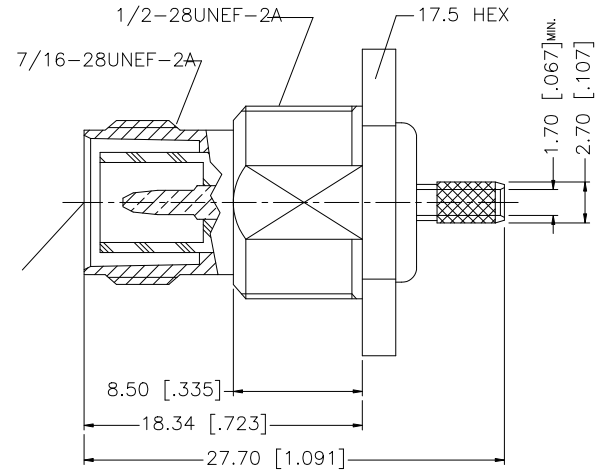

					UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN MILLIMETERS. DIMENSIONS IN [] ARE IN INCHES AND FOR CUSTOMER REFERENCE ONLY. UNLESS OTHERWISE SPECIFIED TOLERANCES FOR MILLIMETERS ARE: 0.5 – 8mm ± 0.20mm 8 – 30mm ± 0.40mm 30 – 120mm ± 0.50mm UNLESS OTHERWISE SPECIFIED TOLERANCES FOR INCHES ARE: .020 – .315 = ± 0.007" .315 – 1.180 = ± 0.015" 1.180 – 4.724 = ± 0.020" DO NOT SCALE DRAWING	APPROVALS		DATE		Amphenol Connex				
8	FERRULE	COPPER	NICKEL	1		DRAWN	GRS	03/03/09						
7	HEX NUT	BRASS	NICKEL	1		CHECKED								
6	LOCK WASHER	BRASS	NICKEL	1		ISSUED			PART DESCRIPTION TNC REVERSE POLARITY BULKHEAD CRIMP JACK (FOR RG174/U, 188A/U, 316/U)					
5	GASKET	SILICONE	RED	1		SHEET	1 OF 1							
4	CONTACT PIN	BRASS	GOLD	1				PART NO. 122514RP						
3	CONTACT	PHOS. BRONZE	GOLD	1										
2	INSULATOR	PTFE	NATURAL	1				DWG. NO. 122514RP.DWG REV. NC SIZE A SCALE NA						
1	BODY	BRASS	NICKEL	1										
DESCRIPTION		MATERIAL	FINISH	QTY										
					CAD FILE C:/122/122514RP.DWG									