


REV.	DATE	DESCRIPTION
NC	08/09/05	INITIAL RELEASE

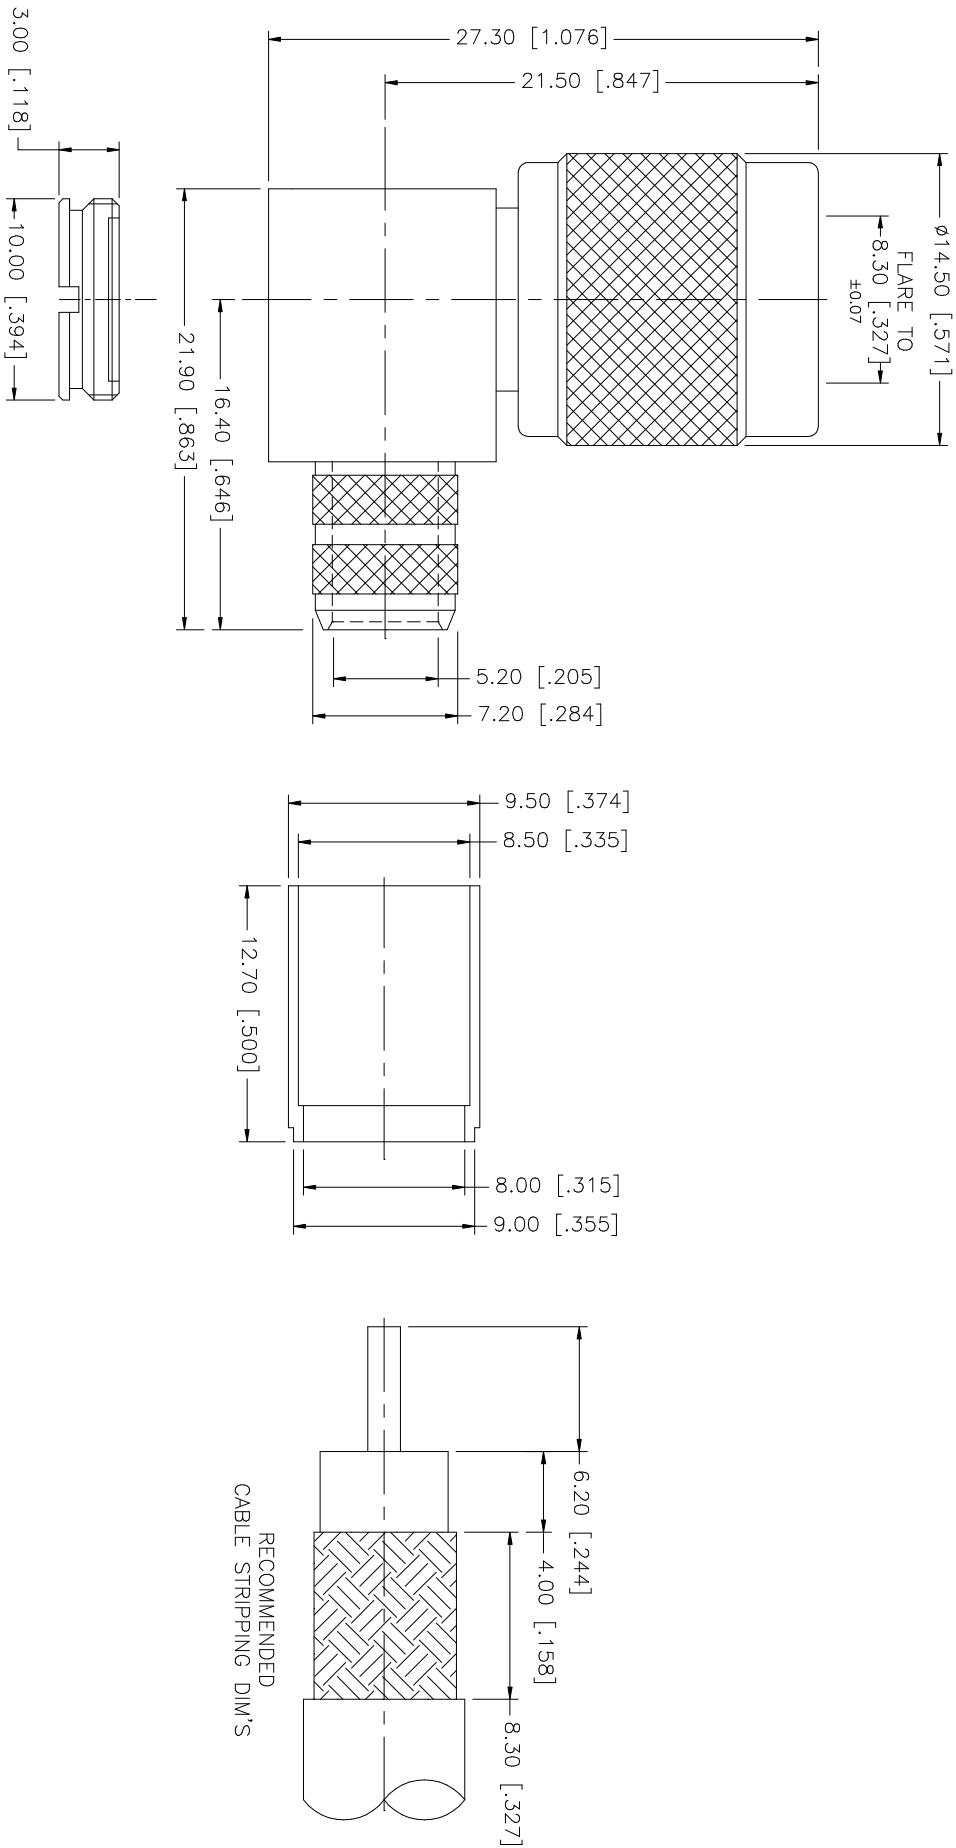

NOTE:

- CRIMPED FERRULE
HEX CRIMP SIZE .324"
- CONTACT PIN TO SOLDER

8					UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN MILLIMETERS. DIMENSIONS IN [] ARE IN INCHES AND FOR CUSTOMER REFERENCE ONLY.	APPROVALS	DATE	Amphenol Connex								
7				UNLESS OTHERWISE SPECIFIED TOLERANCES FOR MILLIMETERS ARE: 0.5 – 8mm ± 0.20mm 8 – 30mm ± 0.40mm 30 – 120mm ± 0.50mm		DRAWN	G.R.S.		08/09/05							
6						CHECKED										
5	COVER	BRASS	NICKEL			1	ISSUED									
4	FERRULE	BRASS	NICKEL	1												
3	CONTACT PIN	PHOS. BRONZE	GOLD	1	UNLESS OTHERWISE SPECIFIED TOLERANCES FOR INCHES ARE: .020 – .315 = ± 0.007" .315 – 1.180 = ± 0.015" 1.180 – 4.724 = ± 0.020"	SHEET	1 OF 1									
2	INSULATOR	TEFLON	NATURAL	1												
1	BODY	BRASS	NICKEL	1												
	DESCRIPTION	MATERIAL	FINISH	QTY	DO NOT SCALE DRAWING	CAD FILE	C:/122/122509RP.DWG		DWG. NO.	122509RP.DWG	REV.	NC	SIZE	A	SCALE	NA