

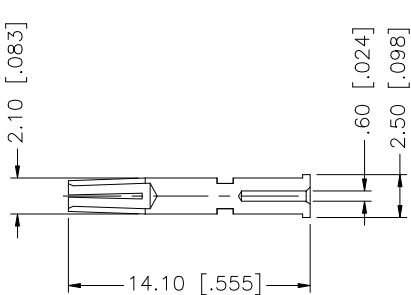
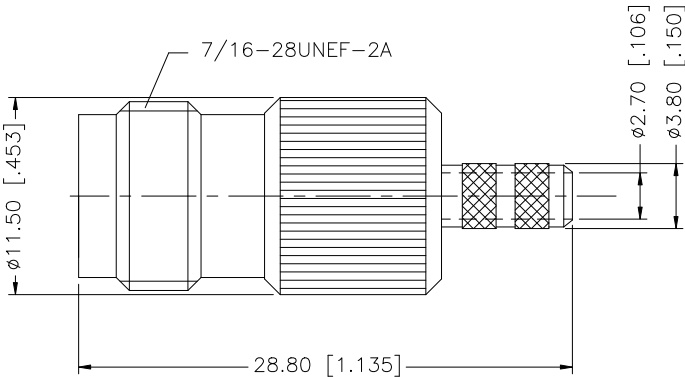


REV.	DATE	ECR NO.	DESCRIPTION
NC	11/20/98	—	INITIAL RELEASE
A	11/22/08	—	UPDATE DRAWING FORMAT

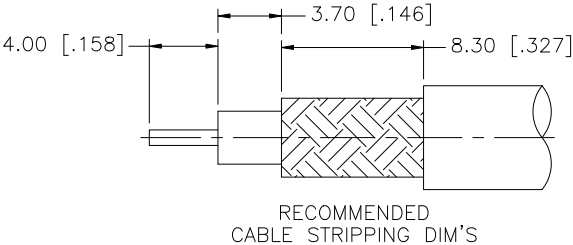

- NOTES:
1. CRIMPED FERRULE HEX CRIMP SIZE .178" [4.52]
 2. CRIMPED CONTACT PIN HEX CRIMP SIZE .068" [1.73]

				UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN MILLIMETERS. DIMENSIONS IN [] ARE IN INCHES AND FOR CUSTOMER REFERENCE ONLY.		APPROVALS		DATE		Amphenol Connex									
8				UNLESS OTHERWISE SPECIFIED TOLERANCES FOR MILLIMETERS ARE: 0.5 – 8mm ± 0.20mm 8 – 30mm ± 0.40mm 30 – 120mm ± 0.50mm UNLESS OTHERWISE SPECIFIED TOLERANCES FOR INCHES ARE: .020 – .315 = ± 0.007” .315 – 1.180 = ± 0.015” 1.180 – 4.724 = ± 0.020”		DRAWN		GRS								11/22/08			
7						CHECKED										PART DESCRIPTION		TNC CRIMP JACK (B 8218, RG180/195/122 CABLE)	
6						ISSUED													
5						DO NOT SCALE DRAWING		SHEET		1 OF 1		PART NO.		122424					
4	FERRULE	COPPER	GOLD	1	CAD FILE			C:/122/122424.DWG		DWG. NO.		122424.DWG	REV. A	SIZE A	SCALE NA				
3	CONTACT PIN	PHOS. BRONZE	GOLD	1															
2	INSULATOR	PTFE	NATURAL	1															
1	BODY	BRASS	NICKEL	1															
DESCRIPTION				MATERIAL	FINISH	QTY													