

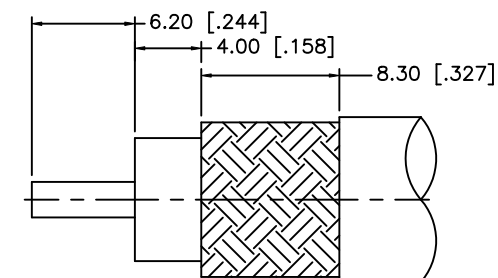
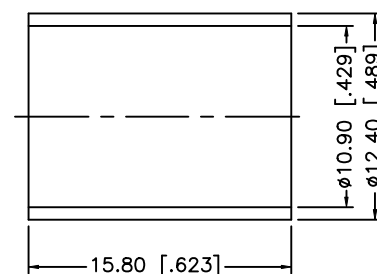


REV.	DATE	ECR NO.	DESCRIPTION
NC	01/26/06	—	INITIAL RELEASE
A	08/04/08	—	REVISE PART DESCRIPTION FROM "JACK" TO "PLUG"

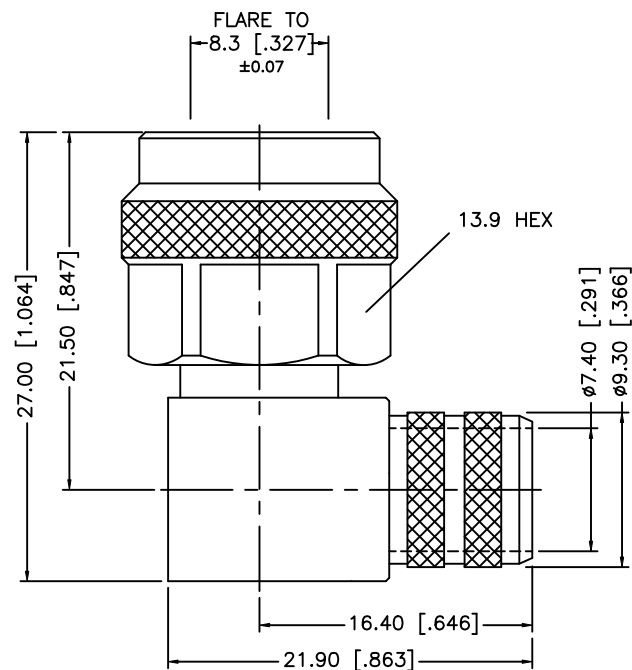

RECOMMENDED
CABLE STRIPPING DIM'S

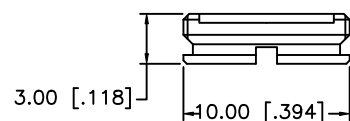

NOTES:

1. CRIMPED FERRULE HEX CRIMP SIZE.429"
2. CONTACT PIN TO SOLDER
3. SHELL MUST WITHSTAND A 60 IN-LBS. MIN. TORQUE.

					UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN MILLIMETERS. DIMENSIONS IN [] ARE IN INCHES AND FOR CUSTOMER REFERENCE ONLY. UNLESS OTHERWISE SPECIFIED TOLERANCES FOR MILLIMETERS ARE: 0.5 – 8mm ± 0.20mm 8 – 30mm ± 0.40mm 30 – 120mm ± 0.50mm UNLESS OTHERWISE SPECIFIED TOLERANCES FOR INCHES ARE: .020 – .315 = ± 0.007” .315 – 1.180 = ± 0.015” 1.180 – 4.724 = ± 0.020” DO NOT SCALE DRAWING	APPROVALS		DATE		Amphenol Connex											
8						DRAWN	GRS	08/04/08													
7						CHECKED															
6	COVER	BRASS	NICKEL	1							PART DESCRIPTION										
5	FERRULE	COPPER	NICKEL	1							TNC R/A CRIMP PLUG – HEX COUPLING NUT										
4	GASKET	RUBBER	RED	1							(FOR BELDEN 9913, 9914)										
3	CONTACT PIN	BRASS	GOLD	1							PART NO.										
2	INSULATOR	PTFE	NATURAL	1							122416–10										
1	HOUSING/BODY	BRASS	NICKEL	1						DWG. NO.		122416–10.DWG		REV.	A	SIZE	A	SCALE	NA		
DESCRIPTION					MATERIAL		FINISH		QTY						CAD FILE		C:/122/122416–10.DWG				