


REV.	DATE	DESCRIPTION
NC	02/05/08	INITIAL RELEASE

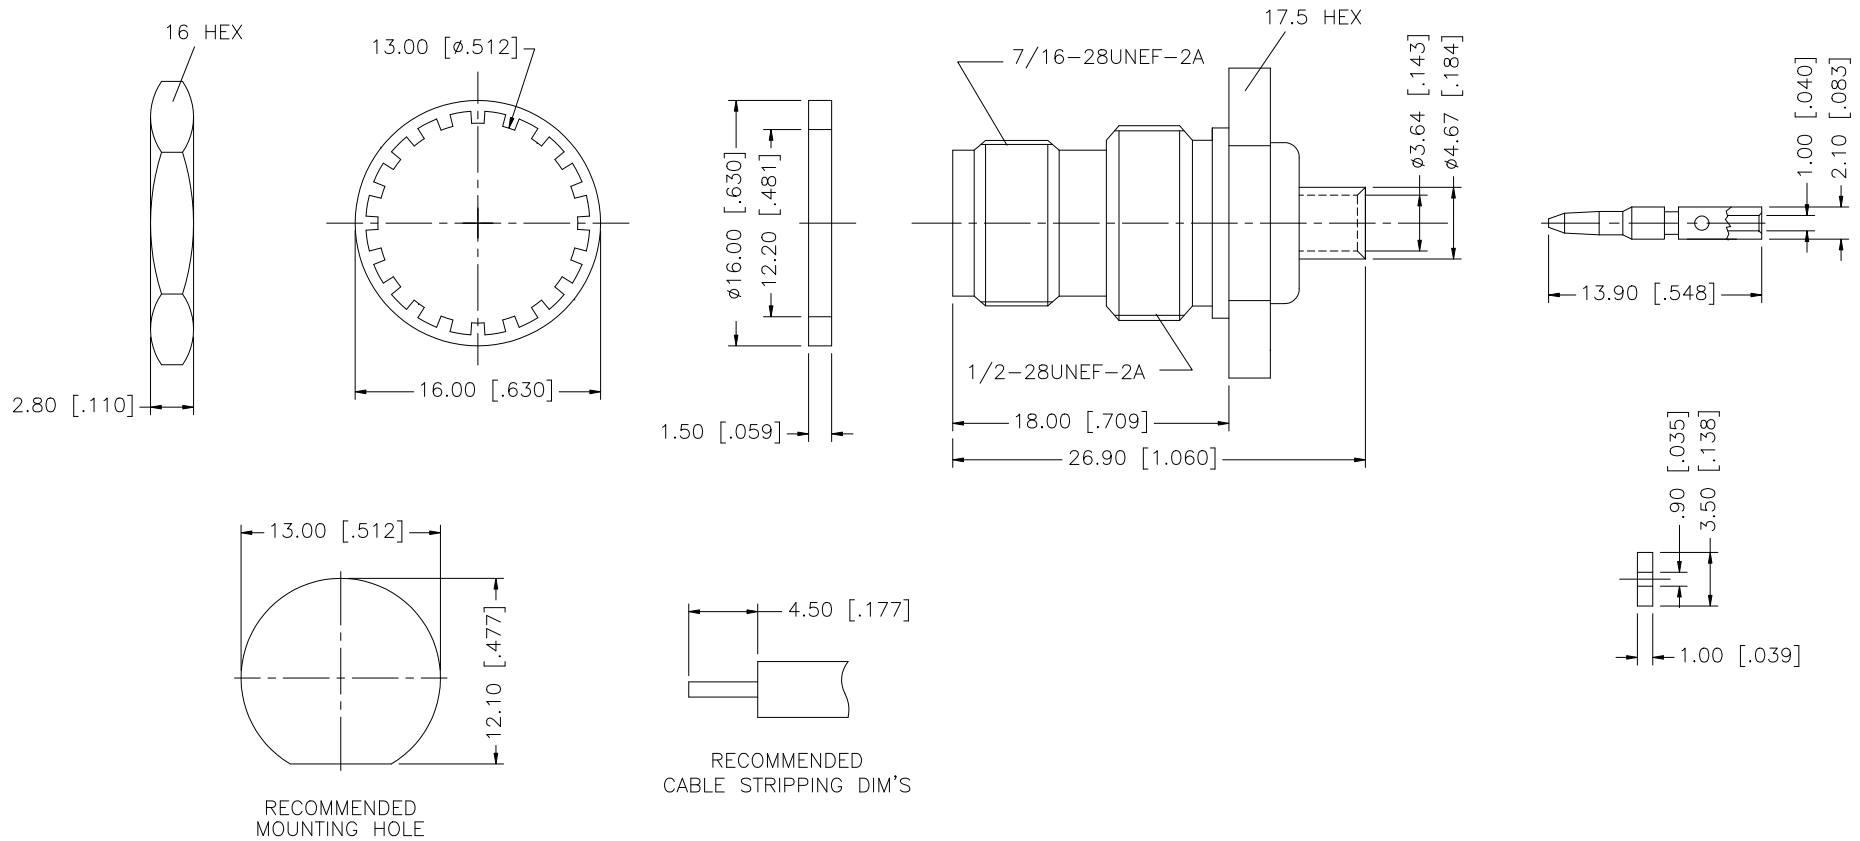

8					UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN MILLIMETERS. DIMENSIONS IN [] ARE IN INCHES AND FOR CUSTOMER REFERENCE ONLY.	APPROVALS	DATE	Amphenol Connex						
7						DRAWN	G.R.S.						02/05/08	
6	GASKET	RUBBER	RED	1	UNLESS OTHERWISE SPECIFIED TOLERANCES FOR MILLIMETERS ARE: 0.5 – 8mm ± 0.20mm 8 – 30mm ± 0.40mm 30 – 120mm ± 0.50mm	CHECKED		PART DESCRIPTION						
5	LOCK WASHER	BRASS	NICKEL	1		ISSUED		TNC R/P BULKHEAD DIRECT SOLDER JACK .141” SIMI RIGID CABLE						
4	HEX NUT	BRASS	NICKEL	1		UNLESS OTHERWISE SPECIFIED TOLERANCES FOR INCHES ARE: .020 – .315 = ± 0.007” .315 – 1.180 = ± 0.015” 1.180 – 4.724 = ± 0.020”	SHEET	1 OF 1		PART NO.				
3	CONTACT PIN	BRASS	GOLD	1	122401RP									
2	INSULATOR	TEFLON	NATURAL	2	CAD FILE					DWG. NO.	122401RP.DWG	REV. NC	SIZE A	SCALE NA
1	BODY	BRASS	NICKEL	1	C:/122/122401RP.DWG									
DESCRIPTION					MATERIAL	FINISH	QTY							