

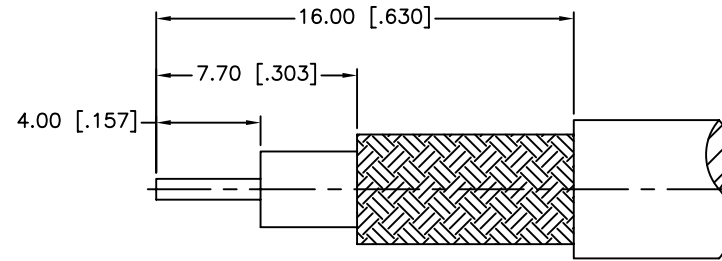
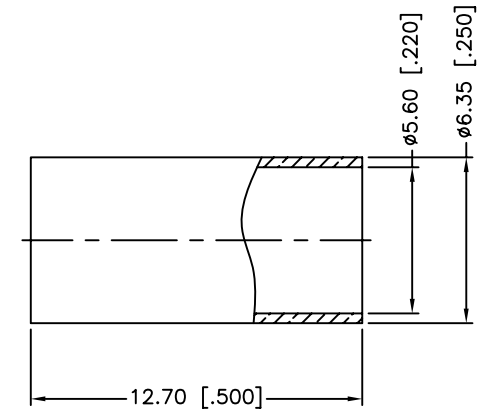


REV.	DATE	ECR NO.	DESCRIPTION
A	12/19/12	2415	UPDATE DRAWING FORMAT

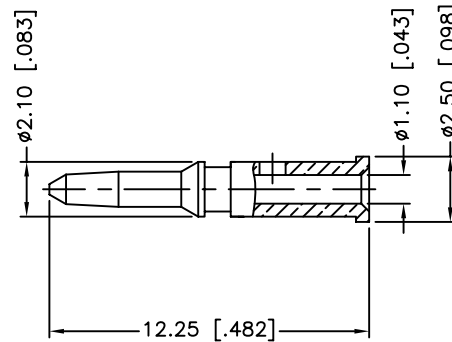

RECOMMENDED
CABLE STRIPPING DIM'S

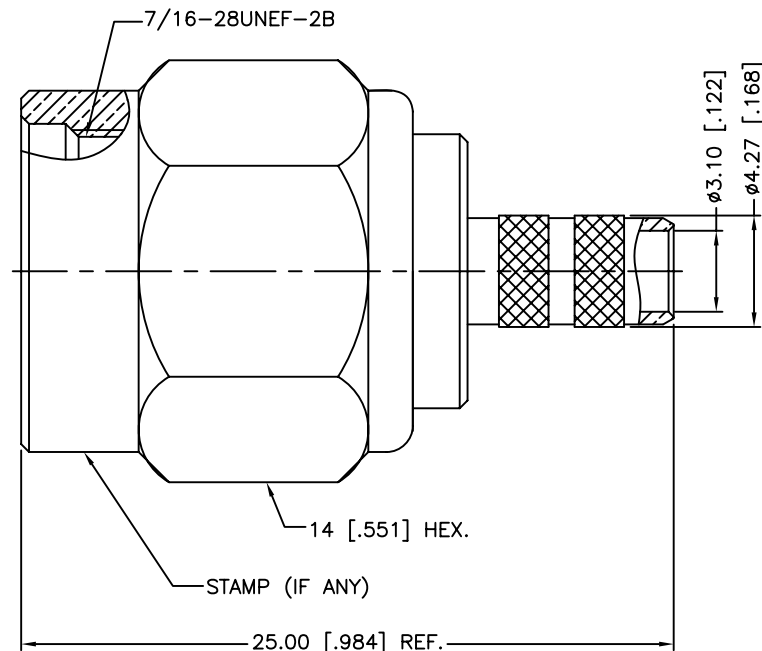

1. IMPEDANCE: 50 OHM
2. FREQUENCY RANGE: DC-11 GHz
3. DIELECTRIC WITHSTANDING VOLTAGE: 1500 VRMS, MIN.
4. DURABILITY: 500 CYCLES MIN.
5. TEMPERATURE RANGE: -40°C TO +85°C
6. CRIMPED FERRULE
HEX CRIMP SIZE .213"
7. CRIMPED CONTACT PIN
HEX CRIMP SIZE .068"

9	FERRULE	BRASS	NICKEL	1	UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN MILLIMETERS. DIMENSIONS IN [] ARE IN INCHES AND FOR CUSTOMER REFERENCE ONLY.	APPROVALS	DATE	Amphenol Connex				
8	CONTACT PIN	BRASS	GOLD	1		DRAWN	M.ZHANG					12/19/12
7	WASHER	BRASS	NICKEL	1		CHECKED						
6	RING	DELIN	NATURAL	1		ISSUED						
5	RETAINER RING	BRASS	NICKEL	1	UNLESS OTHERWISE SPECIFIED TOLERANCES FOR MILLIMETERS ARE: 0.5 – 8mm ± 0.20mm 8 – 30mm ± 0.40mm 30 – 120mm ± 0.50mm	SHEET	1 OF 1	PART DESCRIPTION TNC CRIMP PLUG (FOR RG–55/U,142A/U,223/U,400/U CABLE)				
4	GASKET	RUBBER	RED	1								
3	INSULATOR	DELIN	NATURAL	1		UNLESS OTHERWISE SPECIFIED TOLERANCES FOR INCHES ARE: .020 – .315 = ± 0.007" .315 – 1.180 = ± 0.015" 1.180 – 4.724 = ± 0.020"			PART NO. 122372HEX			
2	BODY	BRASS	NICKEL	1								
1	SHELL	BRASS	NICKEL	1	DO NOT SCALE DRAWING	CAD FILE C:/CONNEX/122372HEX.DWG		DWG. NO. 122372HEX.DWG		REV. A	SIZE A	SCALE NA
DESCRIPTION MATERIAL FINISH QTY												