



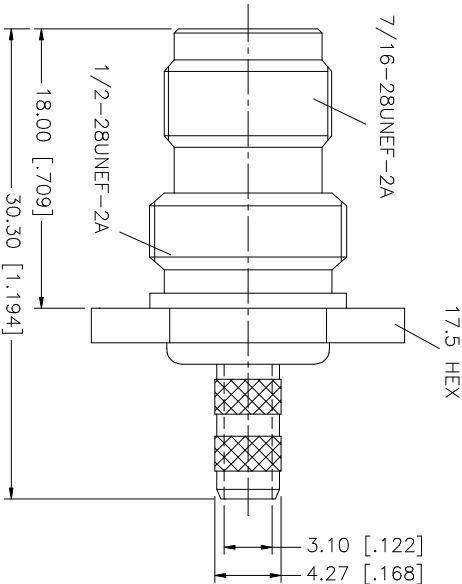
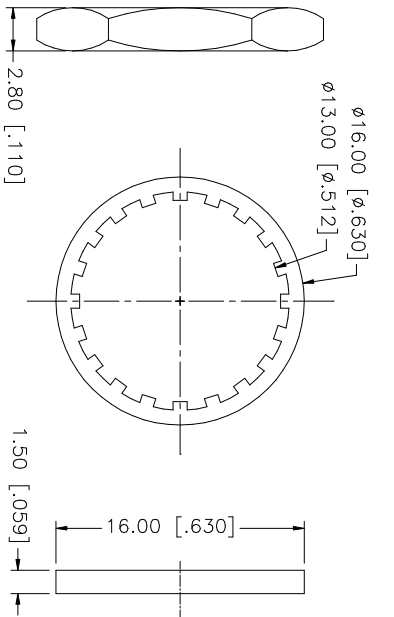


DESCRIPTION		
REV.	DATE	
A	06/15/04	UPDATE DRAWING FORMAT
B	11/29/05	MODIFY BARREL AND FERRULE I.D.

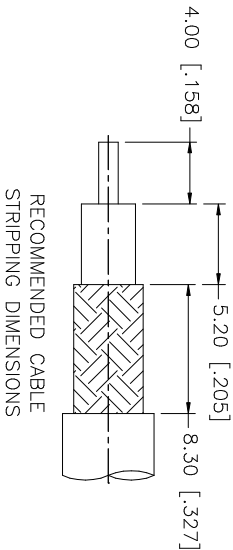

RECOMMENDED MOUNTING HOLE

NOTE:

1. FERRULE HEX. CRIMP SIZE .213"
2. CONTACT PIN CRIMP SIZE .068"
3. MAX. PANEL THICKNESS= 3.5mm

8	FERRULE	COPPER	NICKEL	1	UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN INCHES AND FOR CUSTOMER REFERENCE ONLY.	APPROVALS	DATE	Amphenol Connex PART DESCRIPTION TNC REVERSE POLARITY BULKHEAD CRIMP JACK (FOR RG-55/U, 142A/U, 223/U, 400/U CABLE) PART NO. 122363RP
7	GASKET	RUBBER	RED	1	UNLESS OTHERWISE SPECIFIED TOLERANCES FOR MILLIMETERS ARE:	DRAWN	G.R.S.	
6	HEX NUT	BRASS	NICKEL	1	0.5 - 8mm ± 0.20mm	CHECKED		
5	LOCKWASHER	BRASS	NICKEL	1	8 - 30mm ± 0.40mm	ISSUED		
4	CONTACT PIN	BRASS	GOLD	1	30 - 120mm ± 0.50mm	SHEET	1 OF 1	
3	INSULATOR	TEFLON	NATURAL	1	UNLESS OTHERWISE SPECIFIED TOLERANCES FOR INCHES ARE:			
2	BODY	BRASS	NICKEL	1	.020 - .315 = ± 0.007"			
1					.315 - 1.180 = ± 0.015"			
					1.180 - 4.724 = ± 0.020"			
	DESCRIPTION	MATERIAL	FINISH	QTY	DO NOT SCALE DRAWING	CAD FILE	C:/122/122363RP.DWG	DWG. NO. 122363RP.DWG REV. B SIZE A SCALE NA