

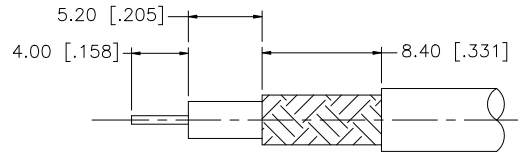






REV.	DATE	ECR NO.	DESCRIPTION
NC	12/28/08	—	INITIAL RELEASE



RECOMMENDED
CABLE STRIPPING DIM'S

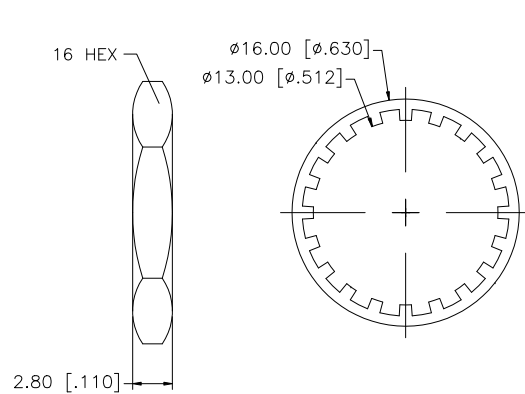

RECOMMENDED
MOUNTING HOLE

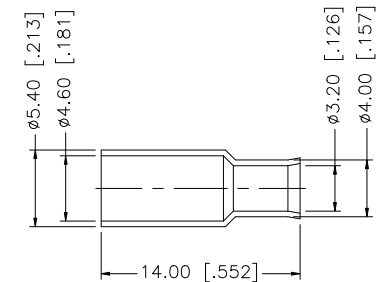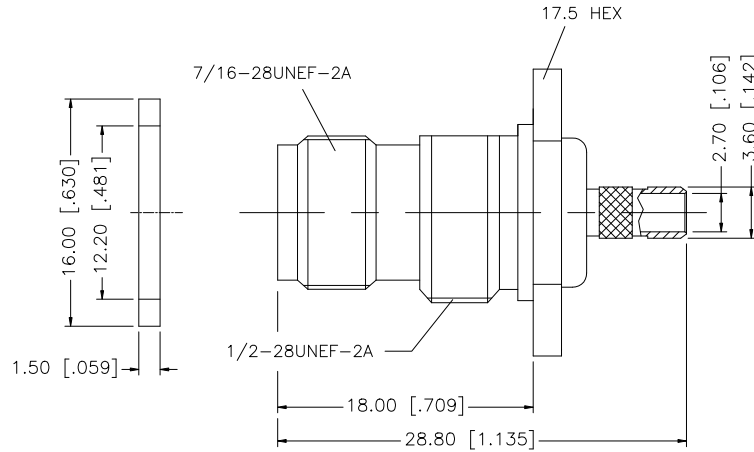

- NOTE:
1. CRIMPED FERRULE HEX CRIMP SIZE .187" [4.75]
 2. CRIMPED CONTACT PIN HEX CRIMP SIZE .068" [1.72]
 3. MAX. PANEL THICKNESS = 3.5mm

REV.	DATE	ECR NO.	DESCRIPTION
NC	12/28/08	—	INITIAL RELEASE

8	FERRULE	COPPER	NICKEL	1
7	SLEEVE	DELIN	NATURAL	1
6	CONTACT PIN	PHOS. BRONZE	GOLD	1
5	HEX NUT	BRASS	NICKEL	1
4	LOCK WASHER	BRASS	NICKEL	1
3	GASKET	RUBBER	RED	1
2	INSULATOR	PTFE	NATURAL	1
1	BODY	BRASS	NICKEL	1

DESCRIPTION	MATERIAL	FINISH	QTY

UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN MILLIMETERS. DIMENSIONS IN [] ARE IN INCHES AND FOR CUSTOMER REFERENCE ONLY.	APPROVALS	DATE
UNLESS OTHERWISE SPECIFIED TOLERANCES FOR MILLIMETERS ARE: 0.5 - 8mm ± 0.20mm 8 - 30mm ± 0.40mm 30 - 120mm ± 0.50mm	DRAWN GRS	12/28/08
UNLESS OTHERWISE SPECIFIED TOLERANCES FOR INCHES ARE: .020 - .315 = ± 0.007" .315 - 1.180 = ± 0.015" 1.180 - 4.724 = ± 0.020"	CHECKED	
	ISSUED	
	SHEET 1 OF 1	
	CAD FILE	

Amphenol Connex			
PART DESCRIPTION			
TNC REVERSE POLARITY BULKHEAD CRIMP JACK (FOR RG-316U/D)			
PART NO.			
122358RP			
DWG. NO.	122358RP.DWG	REV.	NC
SIZE	A	SCALE	NA