

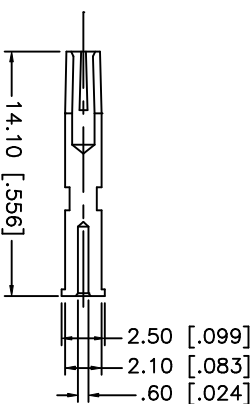
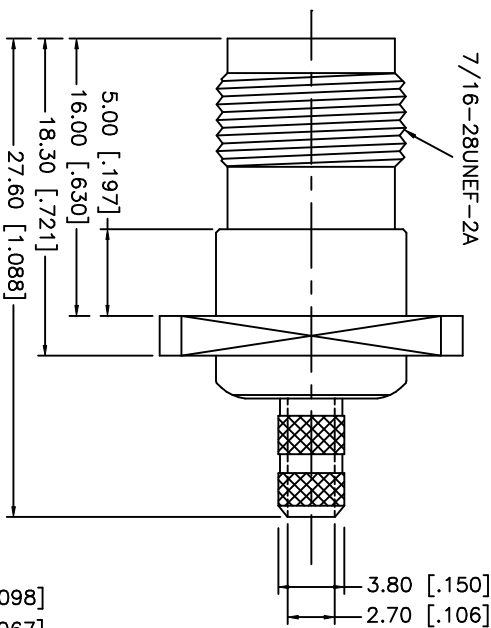
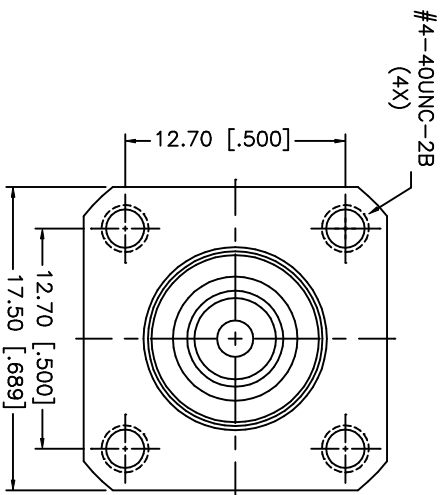
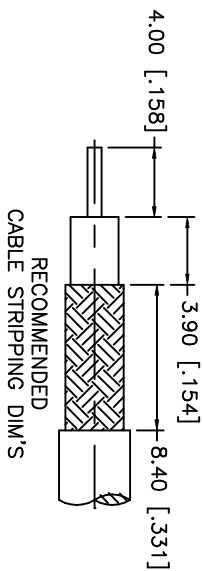


REV.	DATE	DESCRIPTION
NC	07/31/02	INITIAL RELEASE

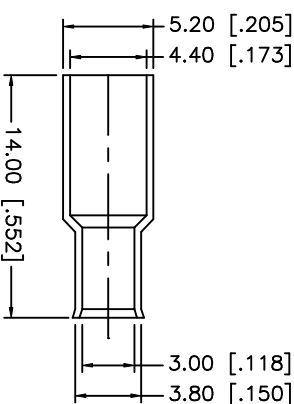

CRIMP NOTES:

1. CRIMPED FERRULE
HEX CRIMP SIZE .178"
2. CRIMPED CONTACT PIN
HEX CRIMP SIZE .068"



8				UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN MILLIMETERS	APPROVALS	DATE	Amphenol - Connex CONNECTOR CORPORATION TNC PANEL CRIMP JACK w/ #4-40 UNC TAPPED HOLES (FOR RG-174/U, 188A/U/ 316/U CABLE) 122246-12				REV.
7				DIMENSIONS IN [] ARE IN INCHES FOR CUSTOMER REFERENCE ONLY	DRAWN	07/31/02					NC
6	FERRULE	BRASS	NICKEL		CHECKED						
5	SLEEVE	DELRI	NATURAL		ISSUED						
4	BARREL	BRASS	NICKEL	UNLESS OTHERWISE SPECIFIED TOLERANCES FOR INCHES ARE: .XXX = ± 0.005" .XX = ± 0.010" .X = ± 0.020"							
3	CONTACT PIN	PHOS. BRONZE	GOLD				SCALE	NA	PART NO.	122246-12	SHEET 1 OF 1
2	INSULATOR	TEFLON	NATURAL				SIZE	A	FSM NO.	99001	DWG. NO.
1	HOUSING/BODY	BRASS	NICKEL								
	DESCRIPTION	MATERIAL	FINISH	DO NOT SCALE DRAWING							