


RECOMMENDED
CABLE STRIPPING DIM'S

REV.	DATE	ECR NO.	DESCRIPTION
A	05/28/12	XXXXXX	UPDATE DRAWING FORMAT

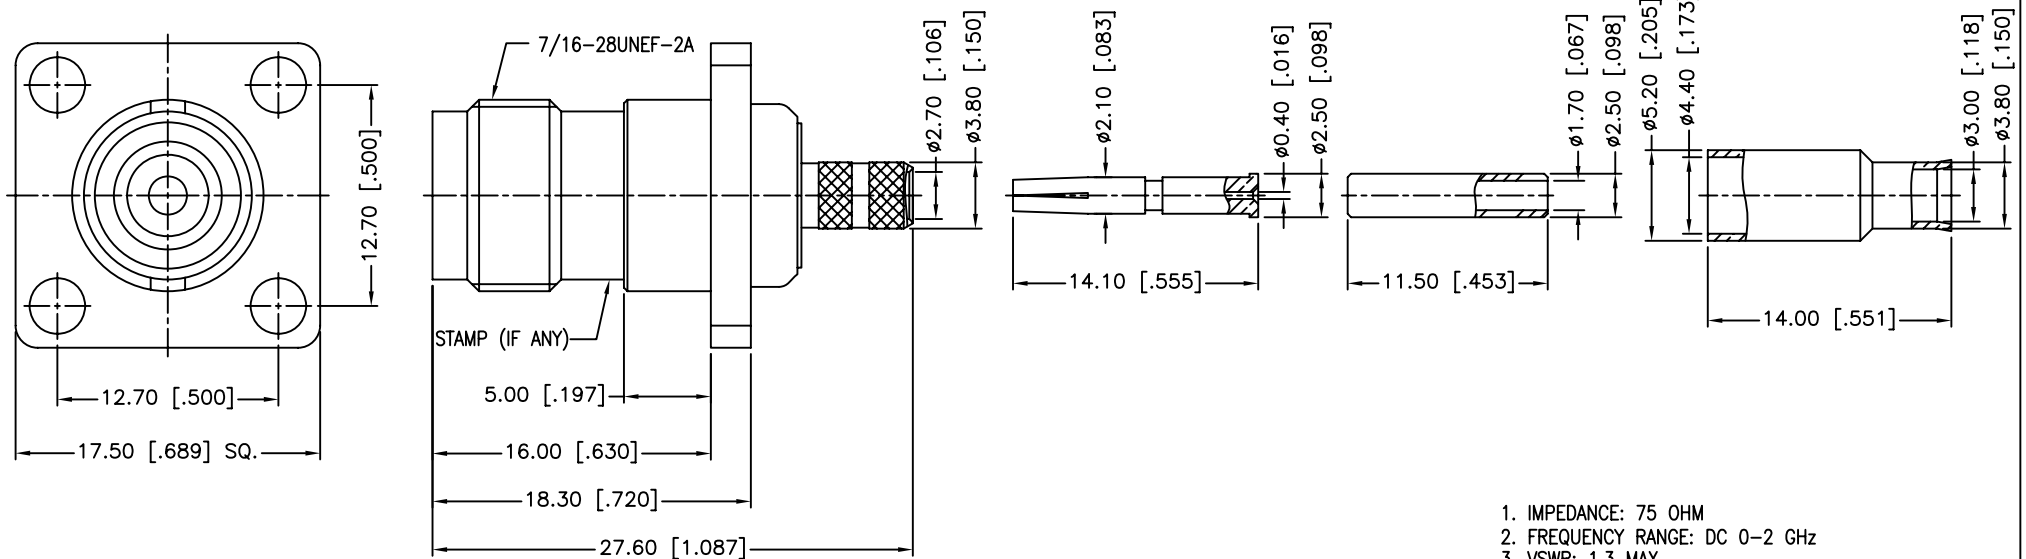

1. IMPEDANCE: 75 OHM
2. FREQUENCY RANGE: DC 0-2 GHz
3. VSWR: 1.3 MAX.
4. DIELECTRIC WITHSTANDING VOLTAGE: 1500 VRMS, MIN.
5. DURABILITY: 500 CYCLES MIN.
6. TEMPERATURE RANGE: -40°C TO +85°C
7. CRIMPED FERRULE
HEX CRIMP SIZE .178"
8. CRIMPED CONTACT PIN
HEX CRIMP SIZE .068"

7	FERRULE	BRASS	NICKEL	1
6	SLEEVE	DELRI	NATURAL	1
5	CONTACT PIN	PHOSPHOR BRONZE	GOLD	1
4	BARREL	BRASS	NICKEL	1
3	INSULATOR	DELRI	NATURAL	1
2	BODY	BRASS	NICKEL	1
1	HOUSING	BRASS	NICKEL	1
	DESCRIPTION	MATERIAL	FINISH	QTY

UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN MILLIMETERS. DIMENSIONS IN [] ARE IN INCHES AND FOR CUSTOMER REFERENCE ONLY.
UNLESS OTHERWISE SPECIFIED TOLERANCES FOR MILLIMETERS ARE: 0.5 - 8mm ± 0.20mm 8 - 30mm ± 0.40mm 30 - 120mm ± 0.50mm
UNLESS OTHERWISE SPECIFIED TOLERANCES FOR INCHES ARE: .020 - .315 = ± 0.007" .315 - 1.180 = ± 0.015" 1.180 - 4.724 = ± 0.020"
DO NOT SCALE DRAWING

APPROVALS	DATE
DRAWN M.ZHANG	05/28/12
CHECKED	
ISSUED	
SHEET 1 OF 1	
CAD FILE	C:/CONNEX/122247.DWG

Amphenol Connex			
PART DESCRIPTION TNC PANEL CRIMP JACK (FOR RG-179/U CABLE)			
PART NO. 122247			
DWG. NO.	122247.DWG	REV.	A
SIZE	A	SCALE	NA