







REV.	DATE	ECR NO.	DESCRIPTION
NC	09/11/09	XXXXXX	INITIAL RELEASE

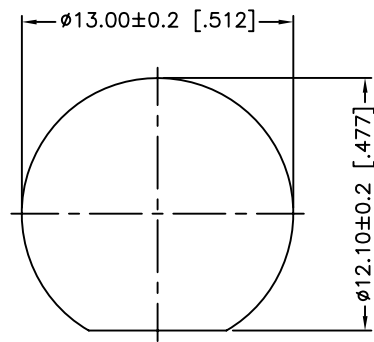

RECOMMENDED
MOUNTING HOLE

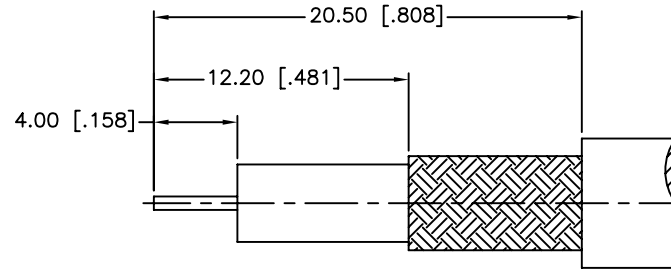

RECOMMENDED
CABLE STRIPPING DIM'S

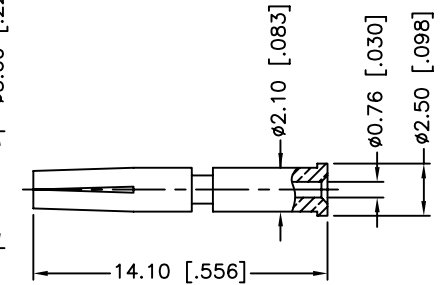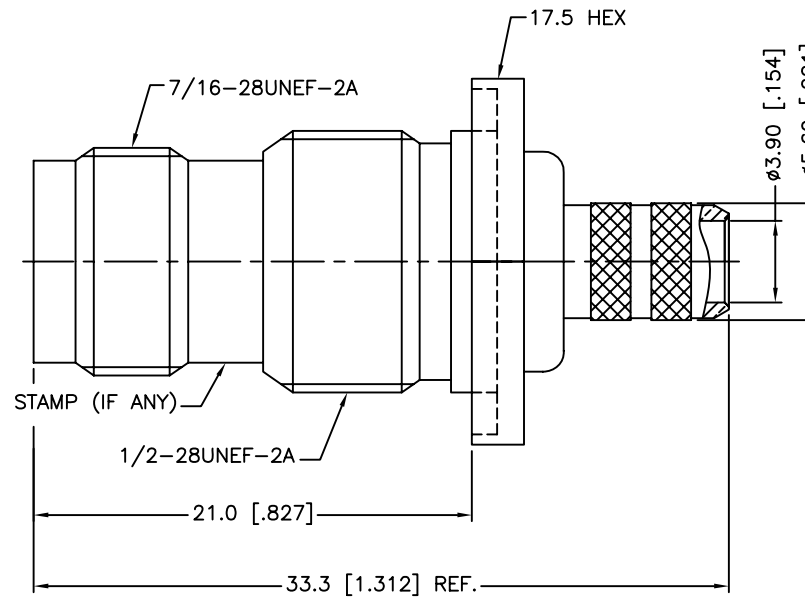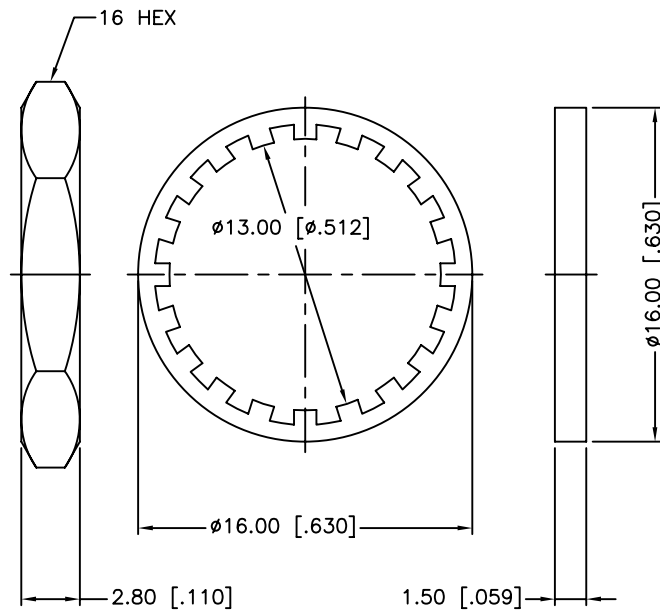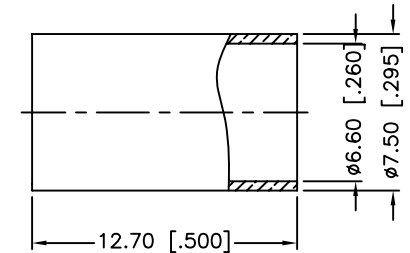

1. CRIMPED FERRULE
HEX CRIMP SIZE .255"
2. CRIMPED CONTACT PIN
HEX CRIMP SIZE .068"
3. MAX. PANEL THICKNESS=6.5mm

9	FERRULE	BRASS	NICKEL	1	UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN MILLIMETERS. DIMENSIONS IN [] ARE IN INCHES AND FOR CUSTOMER REFERENCE ONLY. UNLESS OTHERWISE SPECIFIED TOLERANCES FOR MILLIMETERS ARE: 0.5 – 8mm ± 0.20mm 8 – 30mm ± 0.40mm 30 – 120mm ± 0.50mm UNLESS OTHERWISE SPECIFIED TOLERANCES FOR INCHES ARE: .020 – .315 = ± 0.007" .315 – 1.180 = ± 0.015" 1.180 – 4.724 = ± 0.020"	APPROVALS	DATE	Amphenol Connex					
8	CONTACT PIN	PHOSPHOR BRONZE	GOLD	1		DRAWN	M.ZHANG					09/11/09	
7	HEX NUT	BRASS	NICKEL	1		CHECKED							
6	LOCK WASHER	BRASS	NICKEL	1		ISSUED			PART DESCRIPTION TNC BULKHEAD CRIMP JACK TO 75 OHM (FOR RG–59/U CABLE)				
5	GASKET	RUBBER	RED	1		SHEET	1 OF 1						
4	BARREL	BRASS	NICKEL	1	DO NOT SCALE DRAWING			PART NO. 122171					
3	INSULATOR	PTFE	NATURAL	1		CAD FILE		DWG. NO. 122171.DWG					
2	BODY	BRASS	NICKEL	1		C:/CONNEX/122171.DWG		REV.	NC	SIZE	A	SCALE	NA
1	HOUSING	BRASS	NICKEL	1									
DESCRIPTION		MATERIAL	FINISH	QTY									