

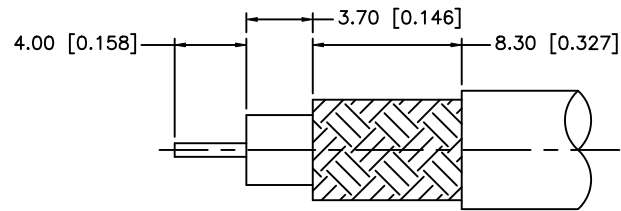
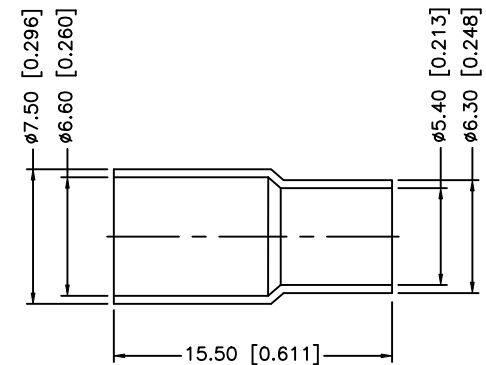


REV.	DATE	ECR NO.	DESCRIPTION
NC	09/02/08	-	INITIAL RELEASE



RECOMMENDED
CABLE STRIPPING DIM'S

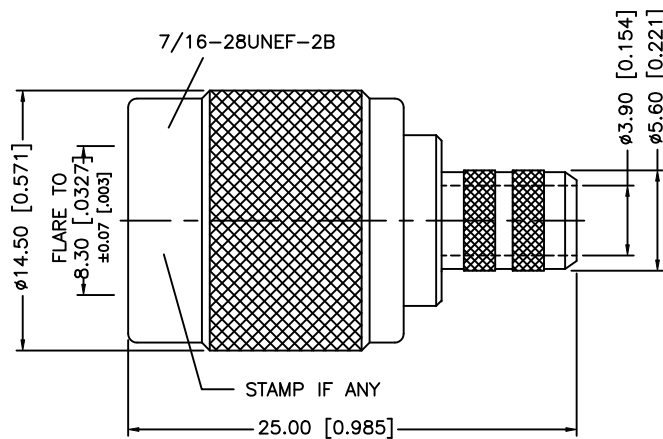

NOTES:

1. CRIMPED FERRULE HEX SIZE .178" [4.52]
2. CRIMPED CONTACT PIN HEX CRIMP SIZE .068" [1.73]

					UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN MILLIMETERS. DIMENSIONS IN [] ARE IN INCHES AND FOR CUSTOMER REFERENCE ONLY. UNLESS OTHERWISE SPECIFIED TOLERANCES FOR MILLIMETERS ARE: 0.5 – 8mm ± 0.20mm 8 – 30mm ± 0.40mm 30 – 120mm ± 0.50mm UNLESS OTHERWISE SPECIFIED TOLERANCES FOR INCHES ARE: .020 – .315 = ± 0.007” .315 – 1.180 = ± 0.015” 1.180 – 4.724 = ± 0.020” DO NOT SCALE DRAWING	APPROVALS		DATE		Amphenol Connex					
8						DRAWN	GRS	09/02/08							
7						CHECKED									
6						ISSUED			PART DESCRIPTION TNC CRIMP PLUG RG59/U PLENUM – 75 ohms						
5						SHEET	1 OF 1								
4	FERRULE	COPPER	NICKEL	1		CAD FILE C:/122/122115.DWG		PART NO. 122115							
3	CONTACT PIN	BRASS	GOLD	1											
2	INSULATOR	DELTRIN	NATURAL	1											
1	BODY	BRASS	NICKEL	1						DWG. NO. 122115.DWG REV. NC SIZE A SCALE NA					
	DESCRIPTION	MATERIAL	FINISH	QTY											