

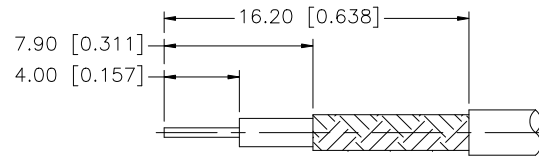
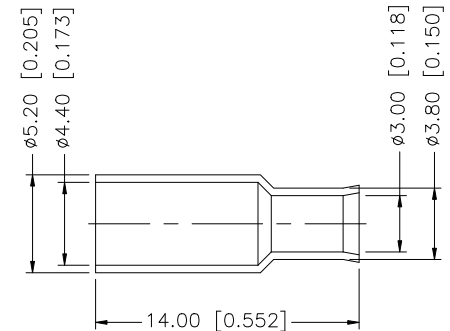

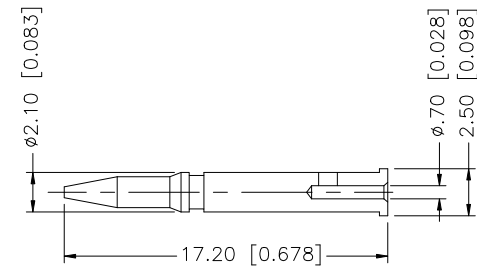


REV.	DATE	ECR NO.	DESCRIPTION
NC	04/07/08	—	INITIAL RELEASE
A	05/21/08	100017	REVISE BODY LENGTH, ADD 12.7 FLATS (4), CONTACT PIN LENGTH TO 17.2

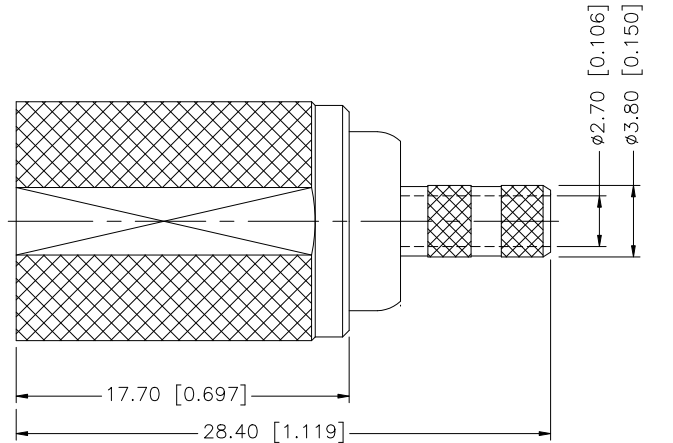

RECOMMENDED
CABLE STRIPPING DIM'S

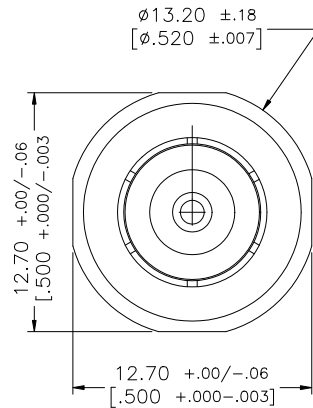

NOTES:

1. CRIMPED FERRULE HEX CRIMP SIZE .178"
2. CRIMPED CONTACT PIN HEC CRIMP SIZE .068"

					UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN MILLIMETERS. DIMENSIONS IN [] ARE IN INCHES AND FOR CUSTOMER REFERENCE ONLY. UNLESS OTHERWISE SPECIFIED TOLERANCES FOR MILLIMETERS ARE: 0.5 – 8mm ± 0.20mm 8 – 30mm ± 0.40mm 30 – 120mm ± 0.50mm UNLESS OTHERWISE SPECIFIED TOLERANCES FOR INCHES ARE: .020 – .315 = ± 0.007” .315 – 1.180 = ± 0.015” 1.180 – 4.724 = ± 0.020” DO NOT SCALE DRAWING	APPROVALS	DATE	Amphenol Connex							
8						DRAWN	G.R.S.								05/21/08
7						CHECKED			PART DESCRIPTION TNC CRIMP PLUG (RG-174/U, 316/U CABLE}						
6						ISSUED									
5	FERRULE	BRASS	NICKEL	1		SHEET	1 OF 1		PART NO. 122116-12						
4	SLEEVE	DELTRIN	NATURAL	1											
3	CONTACT PIN	PHOS. BRONZE	GOLD	1				DWG. NO. 122116-12.DWG							
2	INSULATOR	PTFE	NATURAL	1											
1	SHELL/BODY	BRASS	NICKEL	1				REV.	A	SIZE	A	SCALE	NA		
	DESCRIPTION	MATERIAL	FINISH	QTY				CAD FILE	C:/122/122116-12.DWG						