



REV.	DATE	DESCRIPTION
NC	06/11/00	INITIAL RELEASE

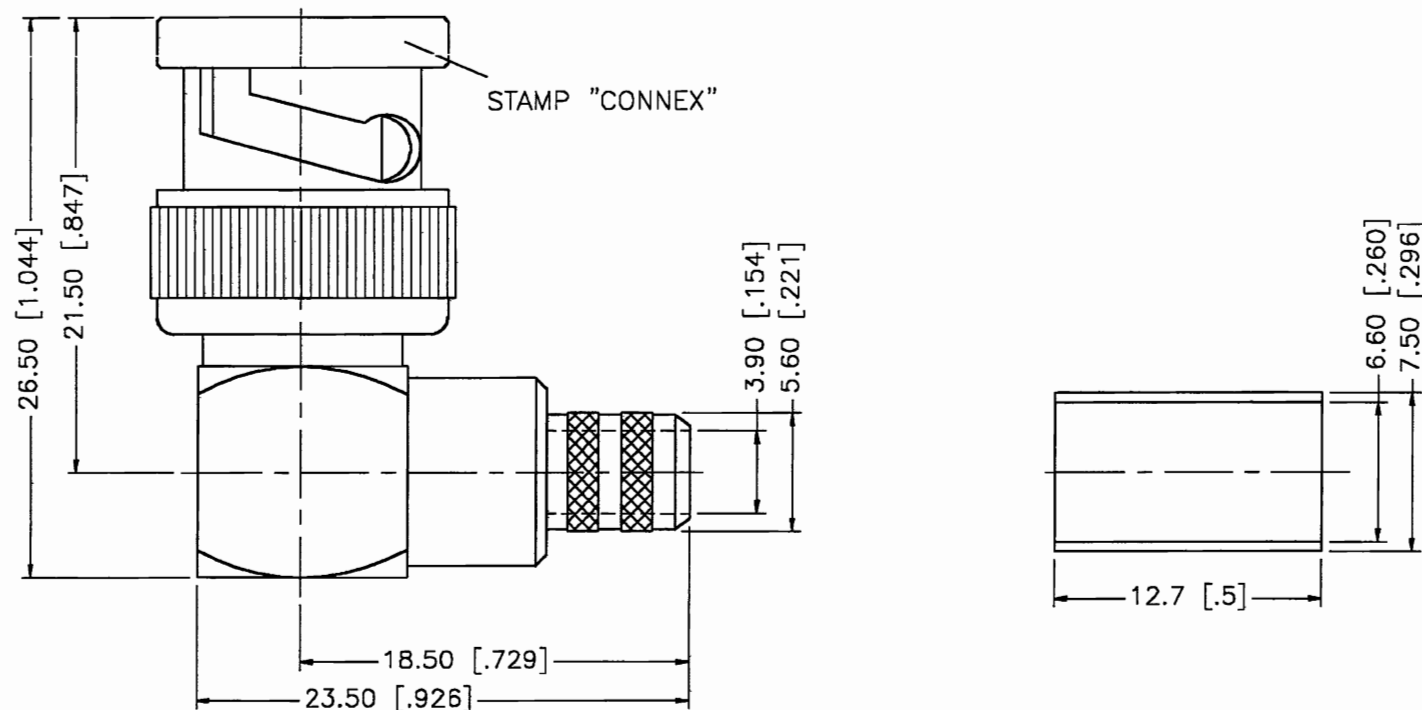

CRIMP NOTES:

1. CRIMPED FERRULE
HEX CRIMP SIZE .255"



RECOMMENDED
CABLE STRIPPING DIM'S

DESCRIPTION			MATERIAL	FINISH	UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN MILLIMETERS	APPROVALS		DATE								
1	BODY		BRASS	NICKEL	DIMENSIONS IN [] ARE IN INCHES FOR CUSTOMER REFERENCE ONLY	DRAWN	G.R.S.	06/11/00		TITLE BNC R/A CRIMP PLUG (RG-59/U CABLE)						
2	INSULATOR		TEFLON	NATURAL		CHECKED										
3	CONTACT PIN		BRASS	GOLD	UNLESS OTHERWISE SPECIFIED TOLERANCES FOR MILLIMETERS ARE: 0.5-6 = ± 0.2 6-30 = ± 0.4 30-120 = ± 0.6 120-315 = ± 1 315-1000 = ± 1.6 1000-2000 = ± 2.4	ISSUED			SIZE		FSCM NO.		DWG. NO.		REV.	
4	FERRULE		COPPER	NICKEL												
5																
6																
7																
8					DO NOT SCALE DRAWING					SCALE	NA	PART NO.	112960	SHEET	1 OF 1	

UNLESS OTHERWISE SPECIFIED
DIMENSIONS IN [] ARE IN INCHES
FOR CUSTOMER REFERENCE ONLY

UNLESS OTHERWISE SPECIFIED
TOLERANCES FOR MILLIMETERS ARE:

0.5-6 = ± 0.2
6-30 = ± 0.4
30-120 = ± 0.6
120-315 = ± 1
315-1000 = ± 1.6
1000-2000 = ± 2.4

DO NOT SCALE DRAWING