

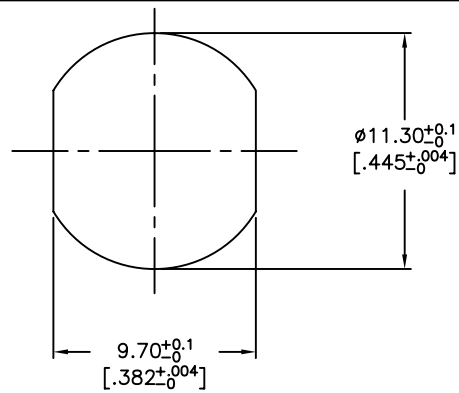


REV.	DATE	ECR NO.	DESCRIPTION
NC	10/19/10	XXXXXX	INITIAL RELEASE

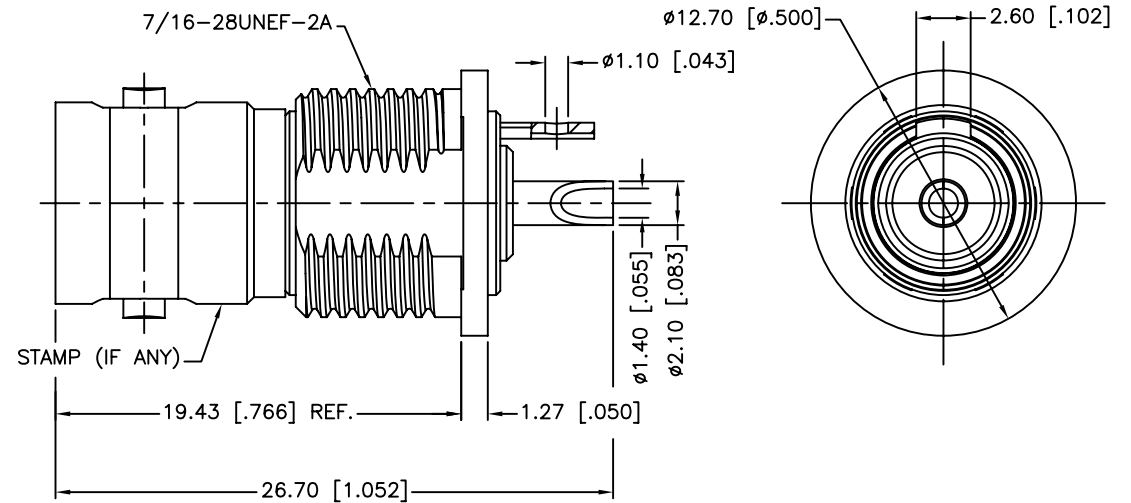

RECOMMENDED
MOUNTING HOLE

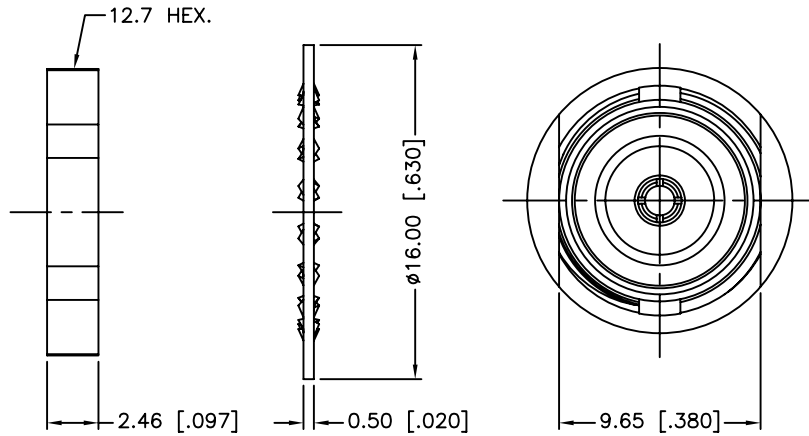

1. VSWR: 1.15 MAX. @ 3 GHz
2. MAX. PANEL THICKNESS=2.5mm

8	HEX NUT	BRASS	NICKEL	1
7	LOCK WASHER	BRASS	NICKEL	1
6	HOUSING	BRASS	NICKEL	1
5	INSULATOR	DELTRIN	NATURAL	1
4	CONTACT PIN	PHOSPHOR BRONZE	GOLD	1
3	INSULATOR	PTFE	NATURAL	1
2	CONTACT PIN	PHOSPHOR BRONZE	GOLD	1
1	BODY	BRASS	NICKEL	1
	DESCRIPTION	MATERIAL	FINISH	QTY

UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN MILLIMETERS. DIMENSIONS IN [] ARE IN INCHES AND FOR CUSTOMER REFERENCE ONLY.
UNLESS OTHERWISE SPECIFIED TOLERANCES FOR MILLIMETERS ARE: 0.5 - 8mm ± 0.20mm 8 - 30mm ± 0.40mm 30 - 120mm ± 0.50mm
UNLESS OTHERWISE SPECIFIED TOLERANCES FOR INCHES ARE: .020 - .315 = ± 0.007" .315 - 1.180 = ± 0.015" 1.180 - 4.724 = ± 0.020"
DO NOT SCALE DRAWING

APPROVALS	DATE
DRAWN M.ZHANG	10/19/10
CHECKED	
ISSUED	
SHEET 1 OF 1	
CAD FILE C:/CONNEX/112808-75.DWG	

Amphenol Connex			
PART DESCRIPTION BNC 75 OHM ISOLATED BULKHEAD RECEPT. JACK, HIGH PERFORMANCE			
PART NO. 112808-75			
DWG. NO. 112808-75.DWG	REV. NC	SIZE A	SCALE NA