
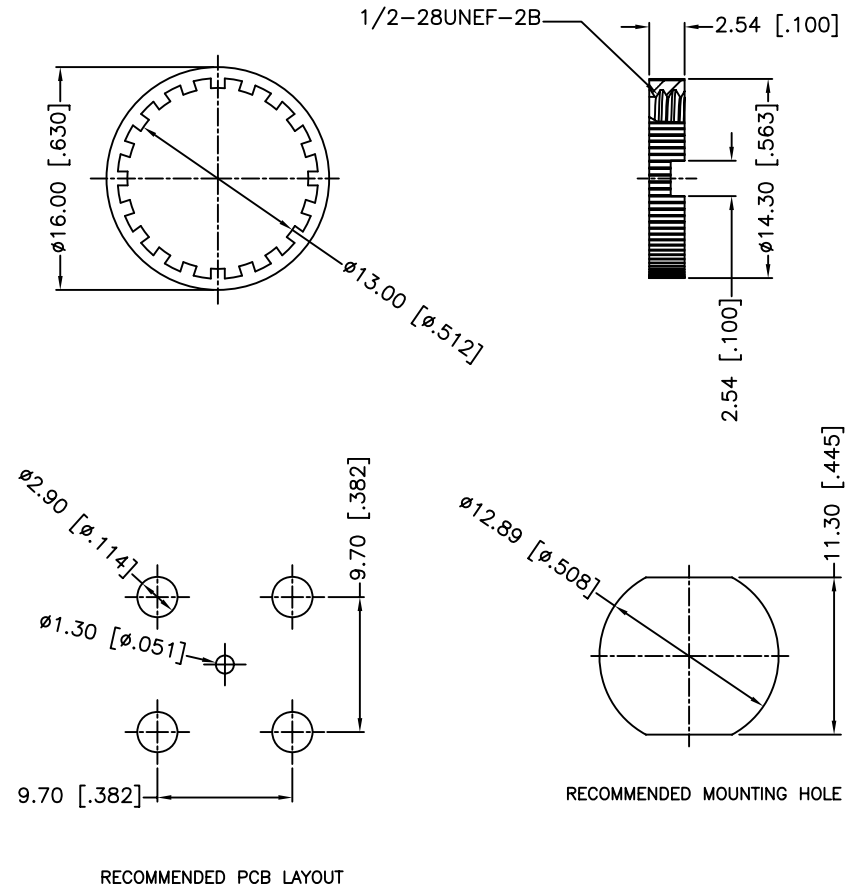


REV.	DATE	ECR NO.	DESCRIPTION
NC	05/11/10	XXXXXX	INITIAL RELEASE
A	02/15/12	2282	ADD NOTE 3

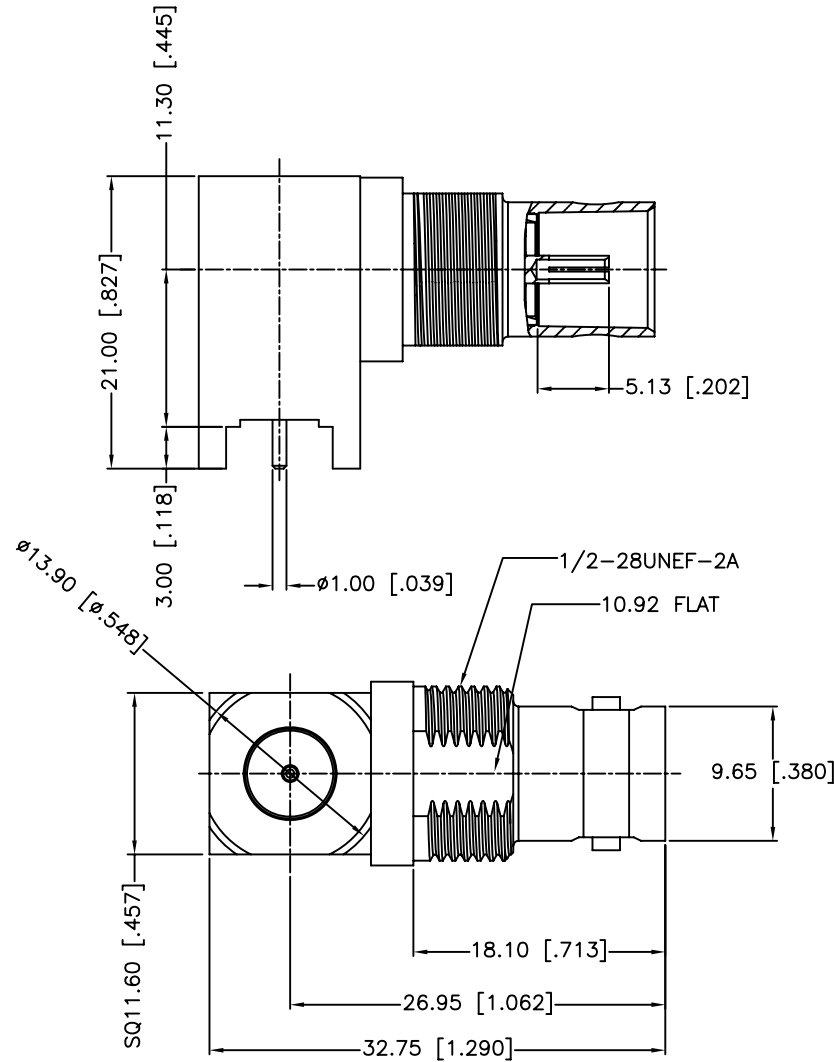

- NOTES:
1. IMPEDENCE:75 OHM
 2. VSWR: 1.15 @ 3GHz
 3. MAX.PANEL THICKNESS=4mm

7	LOCK RING	BRASS	NICKEL	1
6	KNURL NUT	BRASS	NICKEL	1
5	LOCK WASHER	BRASS	NICKEL	1
4	INSULATOR	PTFE	NATURAL	1
3	INSULATOR	PTFE	NATURAL	1
2	CONTACT PIN	BERYLLIUM COPPER	GOLD	1
1	BODY	BRASS	NICKEL	1
	DESCRIPTION	MATERIAL	FINISH	QTY

UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN MILLIMETERS. DIMENSIONS IN [] ARE IN INCHES AND FOR CUSTOMER REFERENCE ONLY.
UNLESS OTHERWISE SPECIFIED TOLERANCES FOR MILLIMETERS ARE: 0.5 - 8mm ± 0.20mm 8 - 30mm ± 0.40mm 30 - 120mm ± 0.50mm
UNLESS OTHERWISE SPECIFIED TOLERANCES FOR INCHES ARE: .020 - .315 = ± 0.007" .315 - 1.180 = ± 0.015" 1.180 - 4.724 = ± 0.020"
DO NOT SCALE DRAWING

APPROVALS	DATE
DRAWN M.ZHANG	02/15/12
CHECKED	
ISSUED	
SHEET 1 OF 1	
CAD FILE Y:/CONNEX/112804.DWG	

Amphenol Connex			
PART DESCRIPTION			
BNC BULKHEAD R/A PCB MOUNT JACK(75 OHM)			
PART NO. 112804			
DWG. NO. 112804	REV. A	SIZE A	SCALE NA