

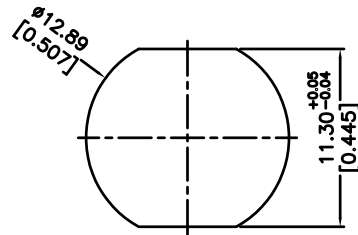
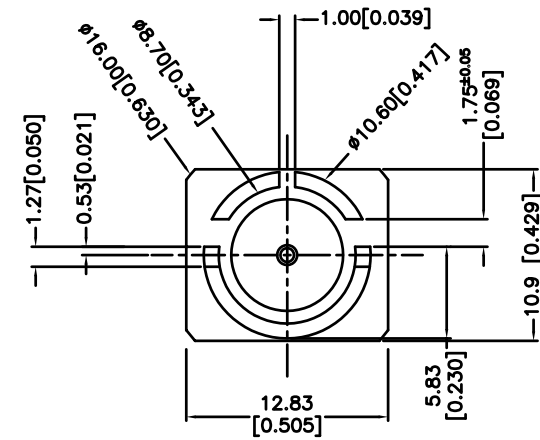
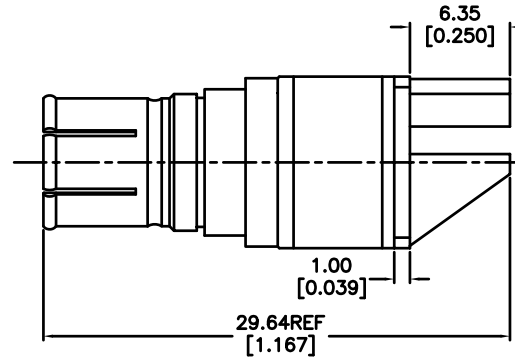




REV.	DATE	DESCRIPTION
A	11/04/10	RELEASE TO MFG.



RECOMMENDED MOUNTING
HOLE DIMENSIONS

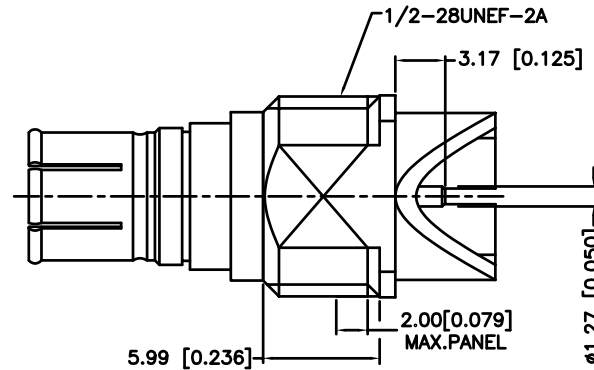

RECOMMENDED
PCB LAYOUT

					UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN MILLIMETERS. DIMENSIONS IN [] ARE IN INCHES AND FOR CUSTOMER REFERENCE ONLY. UNLESS OTHERWISE SPECIFIED TOLERANCES FOR MILLIMETERS ARE: 0.5 – 8mm ± 0.20mm 8 – 30mm ± 0.40mm 30 – 120mm ± 0.50mm UNLESS OTHERWISE SPECIFIED TOLERANCES FOR INCHES ARE: .020 – .315 = ± 0.007" .315 – 1.180 = ± 0.015" 1.180 – 4.724 = ± 0.020" DO NOT SCALE DRAWING	APPROVALS DATE	11/04/10	AMPHENOL CONNEX PART DESCRIPTION BNC END LAUNCH RECEPTACLE PLUG PUSH ON,75 OHMS PART NO. 112770-10 DWG. NO. 112770-10.DWG REV. A SIZE A SCALE NA				
7	HEX NUT	BRASS	NICKEL	1		DRAWN CLEMENT						
6	LOCK WASHER	BRASS	NICKEL	1		CHECKED						
5	INSULATOR	TEFLON	NATURAL	1		ISSUED						
4	HOUSING	BRASS	NICKEL	1		SHEET 1 OF 1						
3	CONTACT PIN	BRASS	GOLD	1								
2	INSULATOR	TEFLON	NATURAL	1								
1	BODY	BRASS	NICKEL	1								
NO	DESCRIPTION	MATERIAL	FINISH	QTY			CAD FILE C:\112\112770-10.DWG					

UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN MILLIMETERS. DIMENSIONS IN [] ARE IN INCHES AND FOR CUSTOMER REFERENCE ONLY.

UNLESS OTHERWISE SPECIFIED TOLERANCES FOR MILLIMETERS ARE:
0.5 - 8mm ± 0.20mm
8 - 30mm ± 0.40mm
30 - 120mm ± 0.50mm

UNLESS OTHERWISE SPECIFIED TOLERANCES FOR INCHES ARE:
.020 - .315 = ± 0.007"
.315 - 1.180 = ± 0.015"
1.180 - 4.724 = ± 0.020"