








REV.	DATE	ECR NO.	DESCRIPTION
NC	11/17/08	—	INITIAL RELEASE

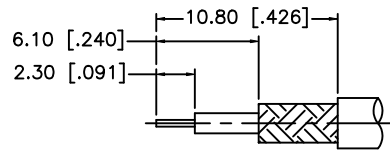

RECOMMENDED CABLE STRIPPING DIMENSIONS



RECOMMENDED MOUNTING HOLE

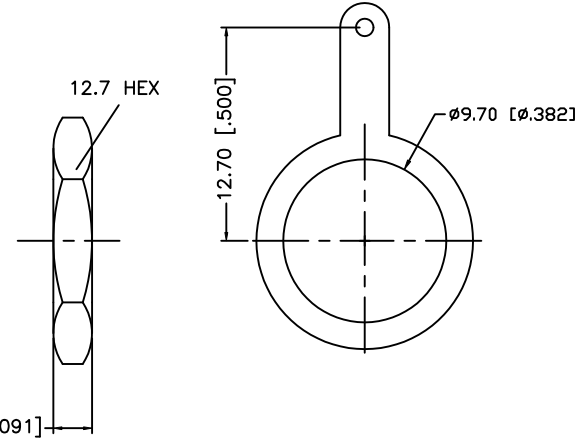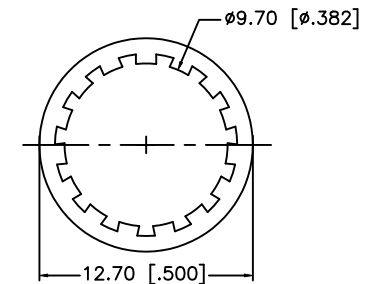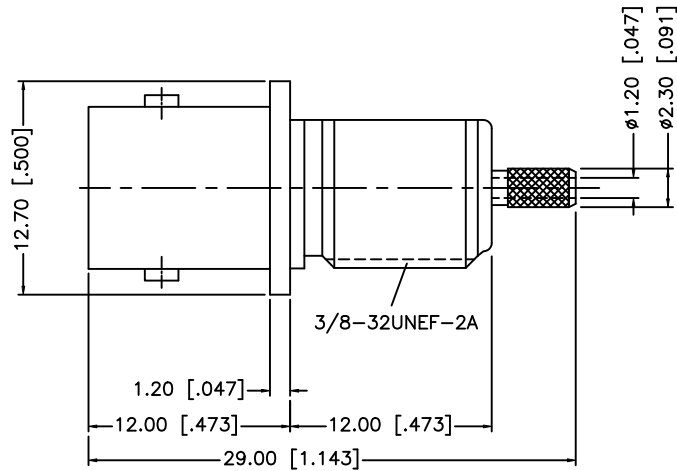

NOTES:

1. CRIMPED FERRULE HEX CRIMP SIZE .128" [3.25]
2. CRIMPED CONTACT PIN SQ. CRIMP SIZE .027" [0.70]

					UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN MILLIMETERS. DIMENSIONS IN [] ARE IN INCHES AND FOR CUSTOMER REFERENCE ONLY. UNLESS OTHERWISE SPECIFIED TOLERANCES FOR MILLIMETERS ARE: 0.5 – 8mm ± 0.20mm 8 – 30mm ± 0.40mm 30 – 120mm ± 0.50mm UNLESS OTHERWISE SPECIFIED TOLERANCES FOR INCHES ARE: .020 – .315 = ± 0.007" .315 – 1.180 = ± 0.015" 1.180 – 4.724 = ± 0.020" DO NOT SCALE DRAWING	APPROVALS		DATE		Amphenol Connex								
8						DRAWN	GRS	11/17/08										
7	SOLDER TAB	BRASS	NICKEL	1		CHECKED												
6	HEX NUT	BRASS	NICKEL	1			ISSUED				PART DESCRIPTION BNC BULKHEAD CRIMP JACK – FRONT MOUNT W/TAB (FOR RG–196A/U CABLE)							
5	LOCK WASHER	BRASS	NICKEL	1			SHEET	1 OF 1										
4	FERRULE	BRASS	NICKEL	1						PART NO. 112757–10								
3	CONTACT PIN	PHOS. BRONZE	GOLD	1														
2	INSULATOR	PTFE	NATURAL	1			CAD FILE C:/112/112757–10.DWG			DWG. NO.		112757–10.DWG		REV.	NC	SIZE	A	SCALE
1	BODY	BRASS	NICKEL	1														
	DESCRIPTION	MATERIAL	FINISH	QTY														