


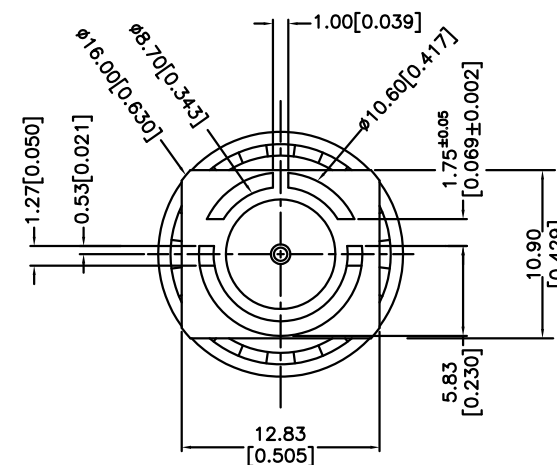
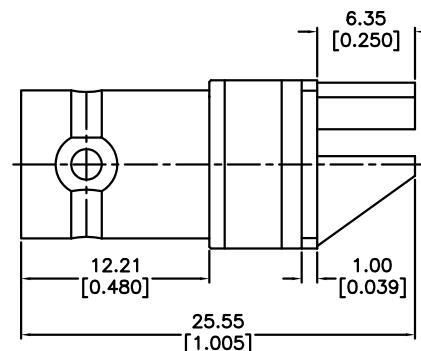




REV.	DATE	DESCRIPTION
A	04/12/10	RELEASE TO MFG.



RECOMMENDED
MOUNTING HOLE DIMENSIONS

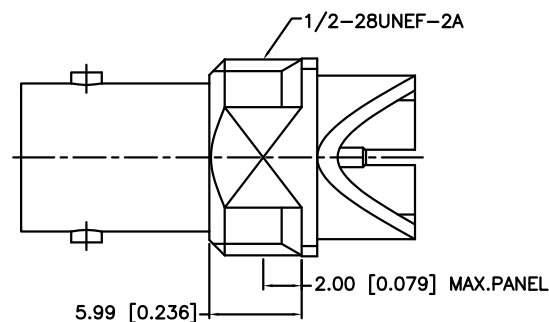

RECOMMENDED
PCB LAYOUT

					UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN MILLIMETERS. DIMENSIONS IN [] ARE IN INCHES AND FOR CUSTOMER REFERENCE ONLY. UNLESS OTHERWISE SPECIFIED TOLERANCES FOR MILLIMETERS ARE: 0.5 - 8mm ± 0.20mm 8 - 30mm ± 0.40mm 30 - 120mm ± 0.50mm UNLESS OTHERWISE SPECIFIED TOLERANCES FOR INCHES ARE: .020 - .315 = ± 0.007" .315 - 1.180 = ± 0.015" 1.180 - 4.724 = ± 0.020"	APPROVALS	DATE	AMPHENOL CONNEX							
						DRAWN	CLEMENT						04/12/10		
						CHECKED			PART DESCRIPTION BNC END LAUNCH RECEPT.JACK,75 OHMS,0.062"PCB 14MM HEX NUT,GOLD PLATED HARDWARE						
						ISSUED									
						SHEET	1 OF 1		PART NO. 112740-13-GHW						
						CAD FILE	C:\112\112740-13-GHW.DWG	DWG. NO.	112740-13-GHW.DWG	REV.	A	SIZE	A	SCALE	NA
6	NUT	BRASS	GOLD	1		DO NOT SCALE DRAWING									
5	LOCK WASHER	BRASS	GOLD	1											
4	HOUSING	BRASS	GOLD	1											
3	CONTACT PIN	PHOSPHOR BRONZE	GOLD	1											
2	INSULATOR	TEFLON	NATURAL	1											
1	BODY	BRASS	GOLD	1											
NO	DESCRIPTION	MATERIAL	FINISH	QTY											