

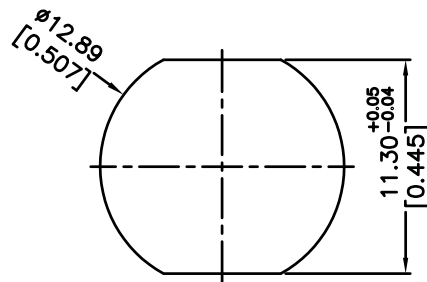
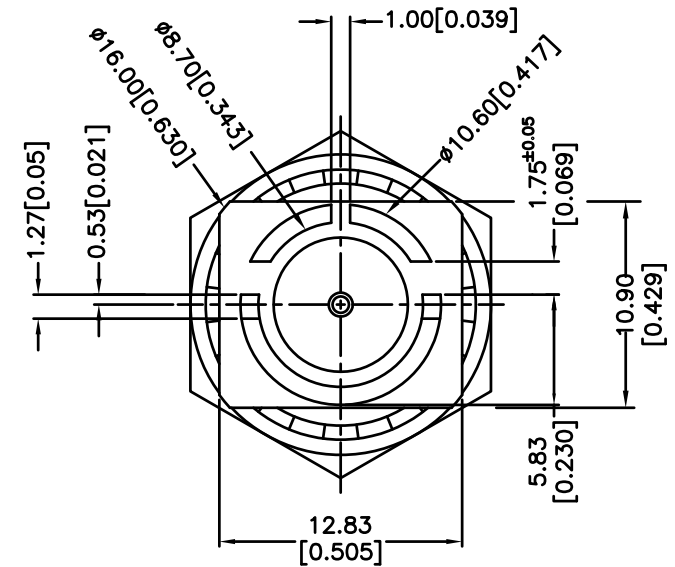
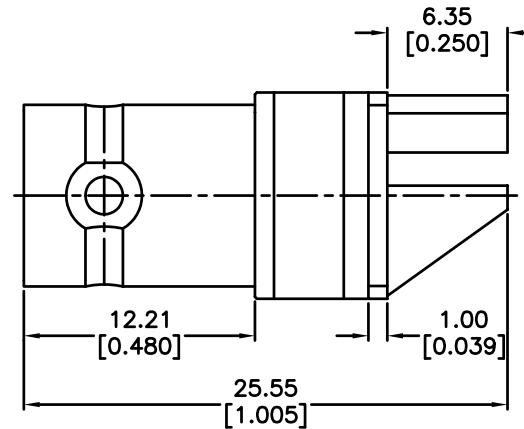
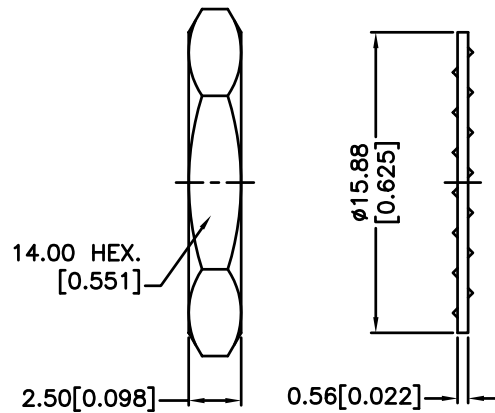


REV.	DATE	DESCRIPTION
A	08/03/10	RELEASE TO MFG.

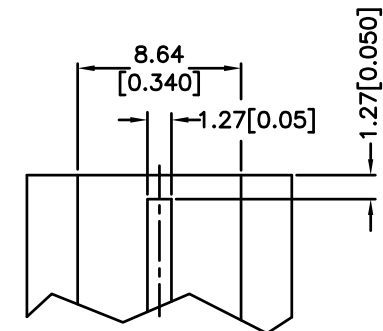

RECOMMENDED
MOUNTING HOLE DIMENSIONS

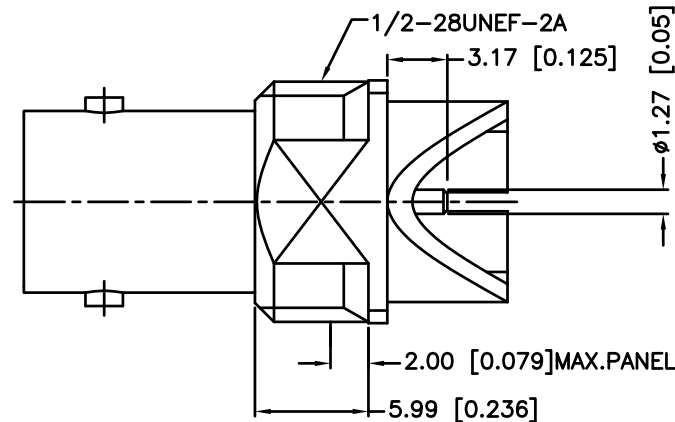

RECOMMENDED
PCB LAYOUT

					UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN MILLIMETERS. DIMENSIONS IN () ARE IN INCHES AND FOR CUSTOMER REFERENCE ONLY. UNLESS OTHERWISE SPECIFIED TOLERANCES FOR MILLIMETERS ARE: 0.5 – 8mm ± 0.20mm 8 – 30mm ± 0.40mm 30 – 120mm ± 0.50mm UNLESS OTHERWISE SPECIFIED TOLERANCES FOR INCHES ARE: .020 – .315 = ± 0.007" .315 – 1.180 = ± 0.015" 1.180 – 4.724 = ± 0.020" DO NOT SCALE DRAWING	APPROVALS		DATE		AMPHENOL CONNEX				
						DRAWN	CLEMENT	08/03/10						
						CHECKED			PART DESCRIPTION BNC END LAUNCH RECEPT.JACK, NICKEL PLATED,75 OHMS					
						ISSUED								
6	HEX NUT	BRASS	NICKEL	1		SHEET	1 OF 1		PART NO. 112740–13N					
5	LOCK WASHER	BRASS	NICKEL	1										
4	HOUSING	BRASS	NICKEL	1				DWG. NO. 112740–13N.DWG						
3	CONTACT PIN	PHOSPHOR BRONZE	GOLD	1										
2	INSULATOR	TEFLON	NATURAL	1			REV. A		SIZE A		SCALE NA			
1	BODY	BRASS	NICKEL	1										
NO	DESCRIPTION	MATERIAL	FINISH	QTY			CAD FILE C:\112\112740–13N.DWG							

6	HEX NUT	BRASS	NICKEL	1
5	LOCK WASHER	BRASS	NICKEL	1
4	HOUSING	BRASS	NICKEL	1
3	CONTACT PIN	PHOSPHOR BRONZE	GOLD	1
2	INSULATOR	TEFLON	NATURAL	1
1	BODY	BRASS	NICKEL	1

UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN MILLIMETERS. DIMENSIONS IN () ARE IN INCHES AND FOR CUSTOMER REFERENCE ONLY.

UNLESS OTHERWISE SPECIFIED TOLERANCES FOR MILLIMETERS ARE:
0.5 - 8mm ± 0.20mm
8 - 30mm ± 0.40mm
30 - 120mm ± 0.50mm

UNLESS OTHERWISE SPECIFIED TOLERANCES FOR INCHES ARE:
.020 - .315 = ± 0.007"
.315 - 1.180 = ± 0.015"
1.180 - 4.724 = ± 0.020"

DO NOT SCALE DRAWING