


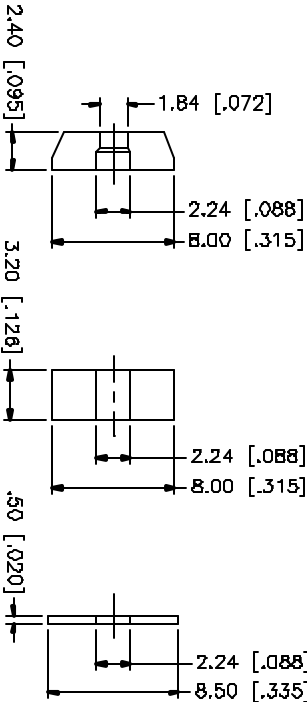
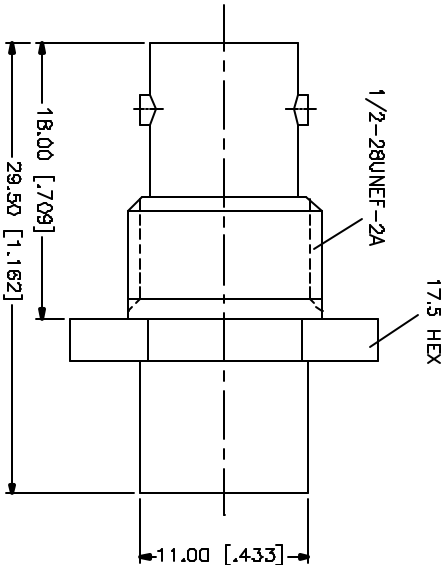
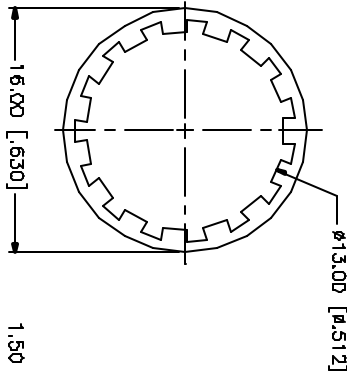
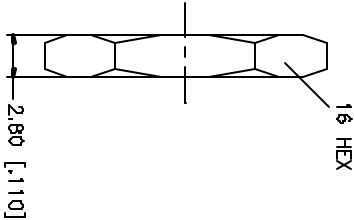



REV.	DATE	DESCRIPTION
NC	03/13/05	INITIAL RELEASE

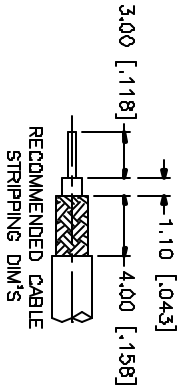

NOTE:
1. CONTACT PIN TO SOLDER.

10	HEX NUT	BRASS	NICKEL	1			
9	LOCK WASHER	BRASS	NICKEL	1			
8	GASKET	SILICONE	RED	1			
7	CONTACT PIN	PHOS. BRONZE	GOLD	1			
6	HEX NUT	BRASS	NICKEL	1			
5	WASHER	BRASS	NICKEL	1			
4	GASKET	SILICONE	RED	1			
3	TOP HAT	BRASS	NICKEL	1			
2	INSULATOR	TEFLON	NATURAL	1			
1	BODY	BRASS	NICKEL	1			
DESCRIPTION		MATERIAL	FINISH	QTY			
					DO NOT SCALE DRAWING		
					UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN MILLIMETERS (DIMENSIONS IN INCHES ARE FOR REFERENCE PURPOSES ONLY). TOLERANCES FOR MILLIMETERS ARE: 0.5 - 30mm ± 0.20mm 30 - 120mm ± 0.50mm UNLESS OTHERWISE SPECIFIED DIMENSIONS FOR INCHES ARE: .020 - .315 = ± 0.007" .315 - 1.180 = ± 0.015" 1.180 - 4.724 = ± 0.020"		
					APPROVALS		
					DATE		
					03/13/05		
					G.R.S.		
					CHECKED		
					ISOLATED		
					SHEET 1 OF 1		
					PART NO.		
					112726		
					BNC BULKHEAD CLAMP JACK (FOR RG-178AU, 196AU)		
					Amphenol Connex		
					C:/112/112726.DWG		
					112726.DWG		
					REV. NC		
					SIZE A		
					SCALE NA		