


NOTES:

1. MATERIALS AND FINISHES:
BODY - BRASS, NICKEL PLATING
CONTACT - PHOSPHOR BRONZE, GOLD PLATING
INSULATOR - PTFE, NATURAL
2. ELECTRICAL:
A. IMPEDANCE: 75 OHM
B. FREQUENCY RANGE: DC-2 GHz
C. DIELECTRIC WITHSTANDING VOLTAGE: 300 VRMS, MIN.
3. MECHANICAL:
A. DURABILITY: 500 CYCLES MIN.
B. TEMPERATURE RANGE: -65°C TO +165°C
4. CRIMPED FERRULE
HEX CRIMP SIZE .320"
5. CRIMPED CONTACT PIN
HEX CRIMP SIZE .068" OR TO SOLDER


THIRD ANGLE PROJ.

REVISIONS


REV	DESCRIPTION	DATE	ECO	APPR
NC	INITIAL RELEASE	18-Apr-05	-----	GRS
A	UPDATE DRAWING FORMAT	04-Jul-14	-----	MZ

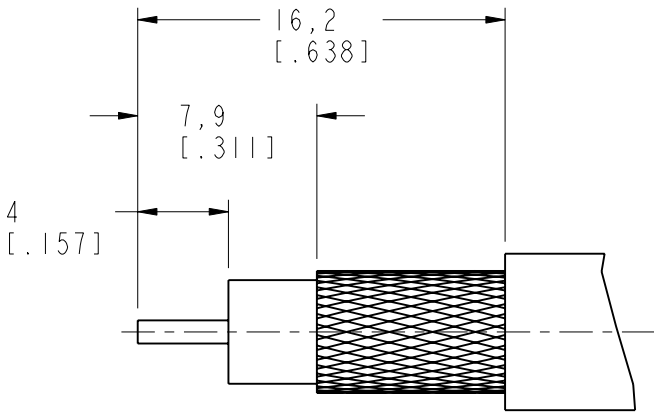

RECOMMENDED
CABLE STRIPPING DIM'S

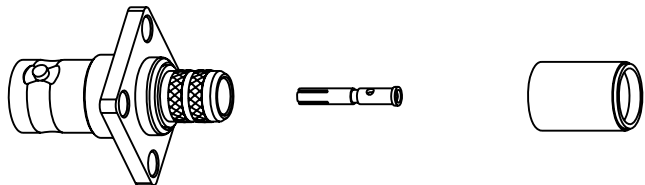

SCALE 1.000

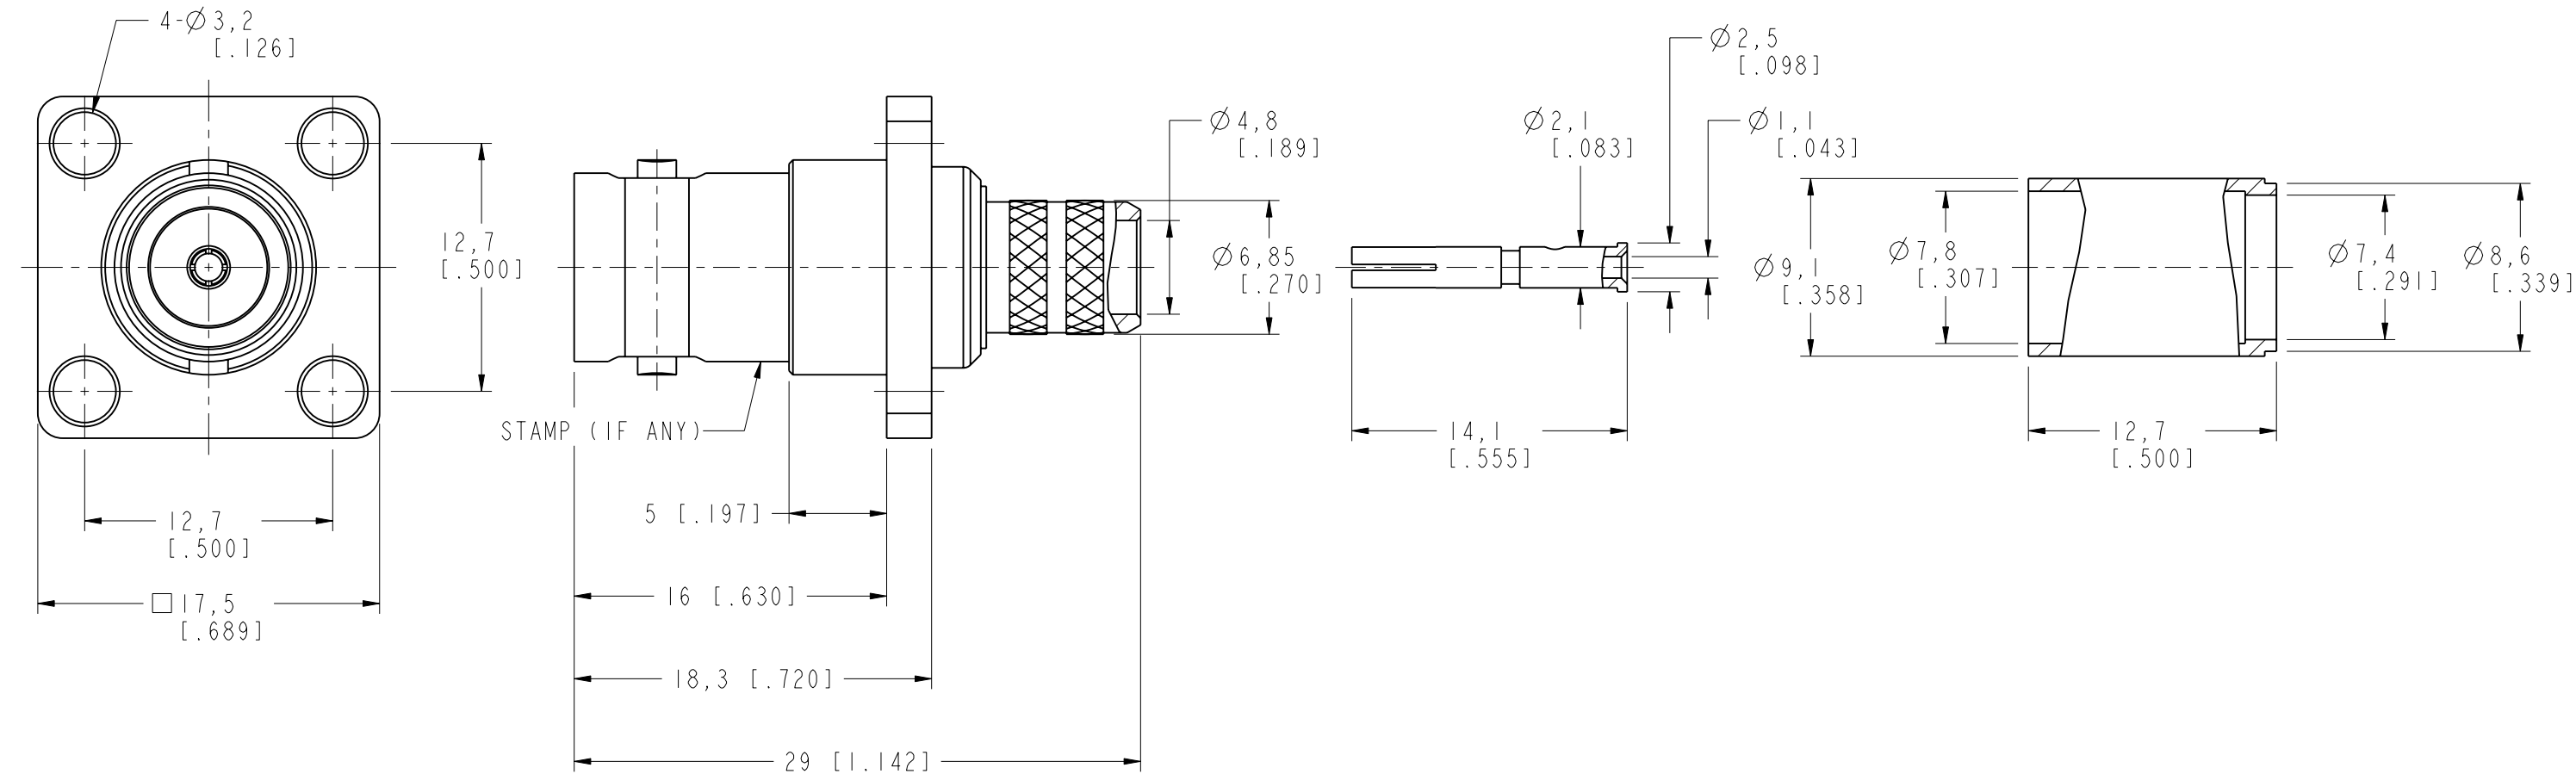

CUSTOMER OUTLINE DRAWING
ALL OTHER SHEETS ARE FOR INTERNAL USE ONLY

UNLESS OTHERWISE SPECIFIED, DIMENSIONS ARE IN METRIC AND TOLERANCES ARE: <0.5mm ± 0.05mm 0.5 - 6mm ± 0.1mm 6 - 30mm ± 0.2mm 30 - 120mm ± 0.3mm ANGLES ±1° NOTICE - These drawings, specifications, or other data (1) are, and remain the property of Amphenol corp. (2) must be returned upon request; and (3) are confidential and not to be disclosed to any person other than those to whom they are given by Amphenol Corp. the furnishing of these drawings, specifications, or other data by Amphenol Corp., or to any other person to anyone for any purpose is not to be regarded by implication or otherwise in any manner licensing, granting rights to permitting such holder or any other person to manufacture, use or sell any product, process or design, patented or otherwise, that may in any way be related to or disclosed by said drawings, specifications, or other data.	MATERIAL - REFERENCE B6521A1-NT3G-6U-75 CONFIGURATION LEVEL: <input type="checkbox"/> <input type="checkbox"/> <input type="checkbox"/> FINISH	DRAWN M. ZHANG ENGINEER APPROVED CAD FILE	DATE 04-Jul-14 DATE 04-Jul-14 DATE	TITLE BNC PANEL CRIMP JACK (FOR RG-6/U CABLE)	Amphenol Connex			
					DRAWING NO.			
					ITEM NO.			
					PART NO. 112727			