
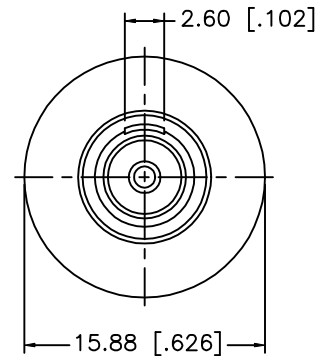
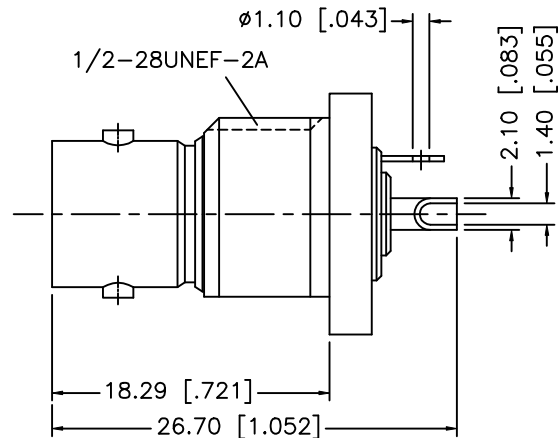

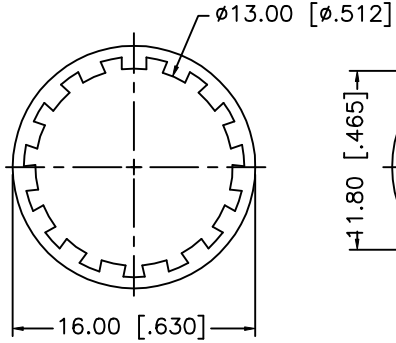



REV.	DATE	DESCRIPTION
NC	04/11/02	INITIAL RELEASE



NOTE:

1. MAX. PANEL THICKNESS = 2.5mm

				UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN MILLIMETERS	APPROVALS	DATE	Amphenol - Connex CONNECTOR CORPORATION						
8					DIMENSIONS IN [] ARE IN INCHES FOR CUSTOMER REFERENCE ONLY	DRAWN						G.R.S.	04/11/02
7	HEX NUT	BRASS	NICKEL			CHECKED							
6	LOCK WASHER	BRASS	NICKEL	ISSUED				TITLE BNC BULKHEAD ISOLATED RECEPTACLE (75ohm)					
5	HOUSING	BRASS	NICKEL				SIZE				FSCM NO.	DWG. NO.	REV.
4	INSULATOR	DELTRIN	NATURAL	UNLESS OTHERWISE SPECIFIED TOLERANCES FOR INCHES ARE: .XXX = ± 0.005" .XX = ± 0.010" .X = ± 0.020"			A				99001	112670.DWG	NC
3	CONTACT PIN	PHOS. BRONZE	GOLD		DO NOT SCALE DRAWING			SCALE	NA	PART NO.	112670	SHEET	1 OF 1
2	INSULATOR	TEFLON	NATURAL										
1	BODY	BRASS	NICKEL										
	DESCRIPTION	MATERIAL	FINISH										