

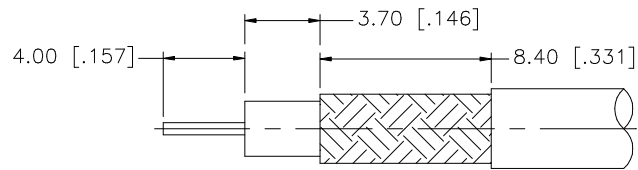
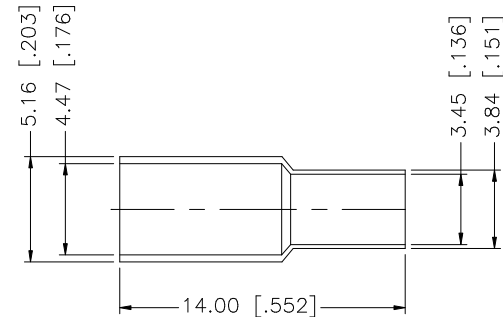
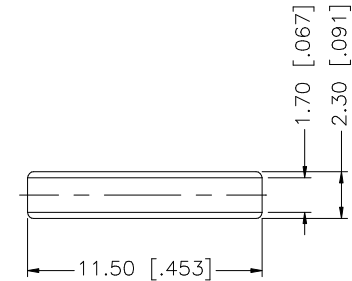


REV.	DATE	DESCRIPTION
NC	01/10/00	INITIAL RELEASE
A	10/01/06	UPDATE DRAWING FORMAT

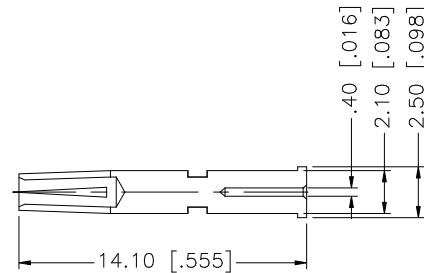

RECOMMENDED
CABLE STRIPPING DIM'S

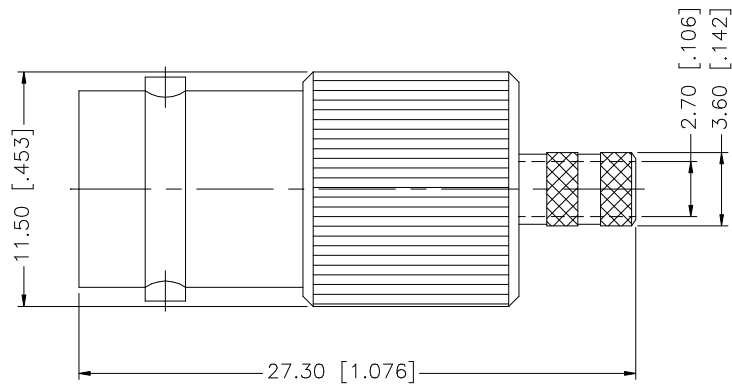

CRIMP NOTES:

1. CRIMPED FERRULE HEX CRIMP SIZE .178"
2. CRIMPED CONTACT PIN HEX CRIMP SIZE .068"

					UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN MILLIMETERS. DIMENSIONS IN [] ARE IN INCHES AND FOR CUSTOMER REFERENCE ONLY. UNLESS OTHERWISE SPECIFIED TOLERANCES FOR MILLIMETERS ARE: 0.5 – 8mm ± 0.20mm 8 – 30mm ± 0.40mm 30 – 120mm ± 0.50mm UNLESS OTHERWISE SPECIFIED TOLERANCES FOR INCHES ARE: .020 – .315 = ± 0.007” .315 – 1.180 = ± 0.015” 1.180 – 4.724 = ± 0.020” DO NOT SCALE DRAWING	APPROVALS		DATE		Amphenol Connex				
8						DRAWN	G.R.S.	10/01/06						
7						CHECKED								
6						ISSUED				PART DESCRIPTION BNC CRIMP JACK (FOR RG–179 DOUBLE BRAID CABLE)				
5	FERRULE	COPPER	NICKEL	1		SHEET	1 OF 1							
4	SLEEVE	DELTRIN	NATURAL	1					PART NO. 112647					
3	CONTACT PIN	PHOS. BRONZE	GOLD	1										
2	INSULATOR	TEFLON	NATURAL	1					DWG. NO. 112647.DWG REV. A SIZE A SCALE NA					
1	BODY	BRASS	NICKEL	1										
	DESCRIPTION	MATERIAL	FINISH	QTY					CAD FILE C:/112/112647.DWG					