








REV.	DATE	DESCRIPTION
NC	07/23/99	INITIAL RELEASE
A	05/01/04	UPDATE DRAWING FORMAT
B	10/19/06	ADD CABLE DESCRIPTION, MODIFY NOTE 2
C	11/25/07	REVISE BARREL AND FERRULE DIAMETERS, MODIFY NOTE 1 AND 2

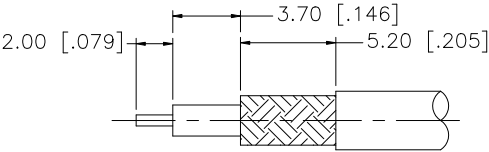

RECOMMENDED CABLE
STRIPPING DIMENSIONS



RECOMMENDED
MOUNTING HOLE

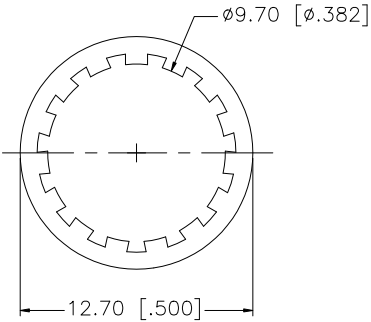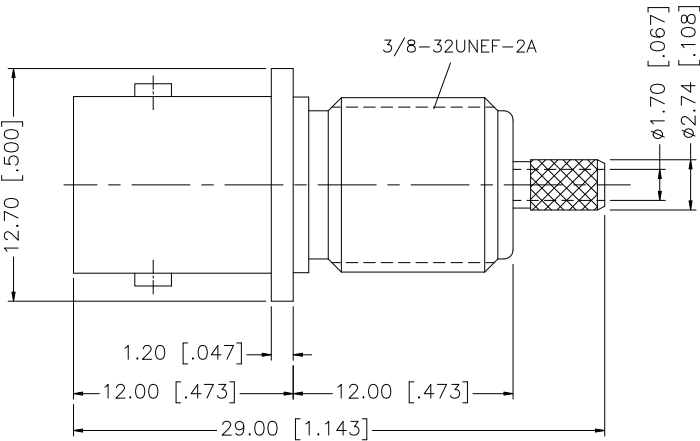

CRIMP NOTES:

1. CRIMPED FERRULE HEX CRIMP SIZE .151"
2. CENTER CONTACT TO SOLDER
3. MAX. PANEL THICKNESS = 7.0mm

					UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN MILLIMETERS. DIMENSIONS IN [] ARE IN INCHES AND FOR CUSTOMER REFERENCE ONLY.	APPROVALS	DATE	Amphenol Connex					
8						DRAWN	G.R.S.						11/25/07
7	FERRULE	COPPER	NICKEL	1	UNLESS OTHERWISE SPECIFIED TOLERANCES FOR MILLIMETERS ARE: 0.5 – 8mm ± 0.20mm 8 – 30mm ± 0.40mm 30 – 120mm ± 0.50mm UNLESS OTHERWISE SPECIFIED TOLERANCES FOR INCHES ARE: .020 – .315 = ± 0.007” .315 – 1.180 = ± 0.015” 1.180 – 4.724 = ± 0.020”	CHECKED		PART DESCRIPTION BNC BULKHEAD CRIMP JACK (FOR 316/U DOUBLE BRAID CABLE)					
6	HEX NUT	BRASS	NICKEL	1		ISSUED							
5	LOCK WASHER	BRASS	NICKEL	1		SHEET	1 OF 1		PART NO. 112634				
4	CONTACT PIN	BRASS	GOLD	1									
3	CONTACT PIN	PHOS. BRONZE	GOLD	1		CAD FILE		DWG. NO.		112634.DWG	REV. C	SIZE A	SCALE NA
2	INSULATOR	TEFLON	NATURAL	1		C:/112/112634.DWG							
1	BODY	BRASS	NICKEL	1									
	DESCRIPTION	MATERIAL	FINISH	QTY	DO NOT SCALE DRAWING								