

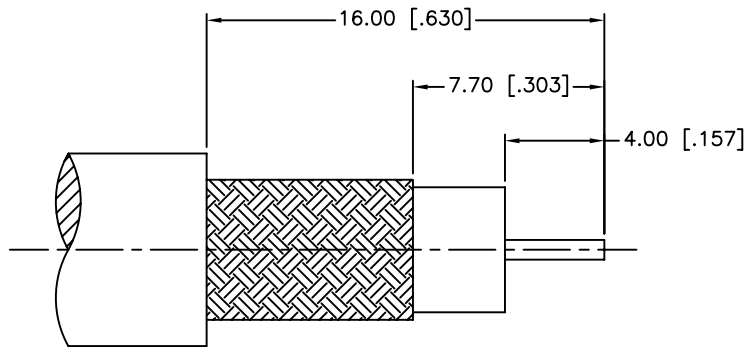


REV.	DATE	ECR NO.	DESCRIPTION
NC	10/28/10	XXXXXX	INITIAL RELEASE

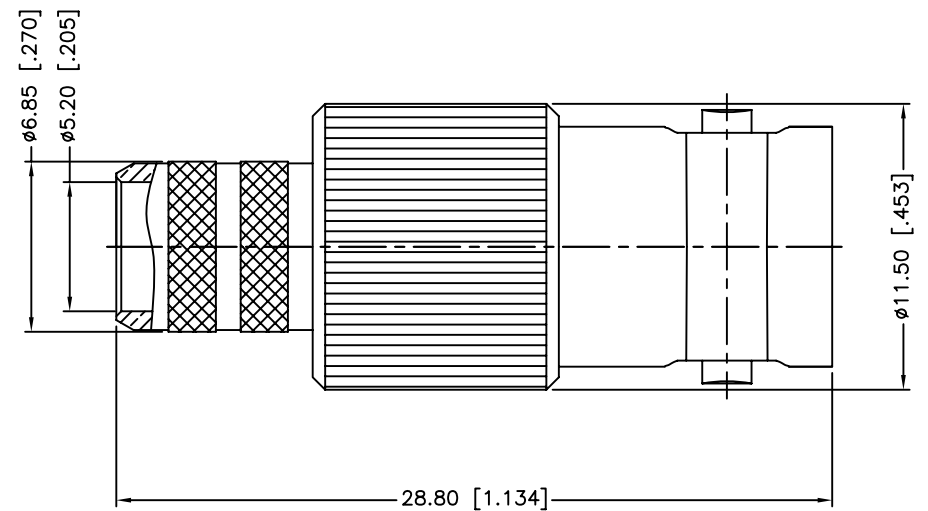

RECOMMENDED
CABLE STRIPPING DIM'S

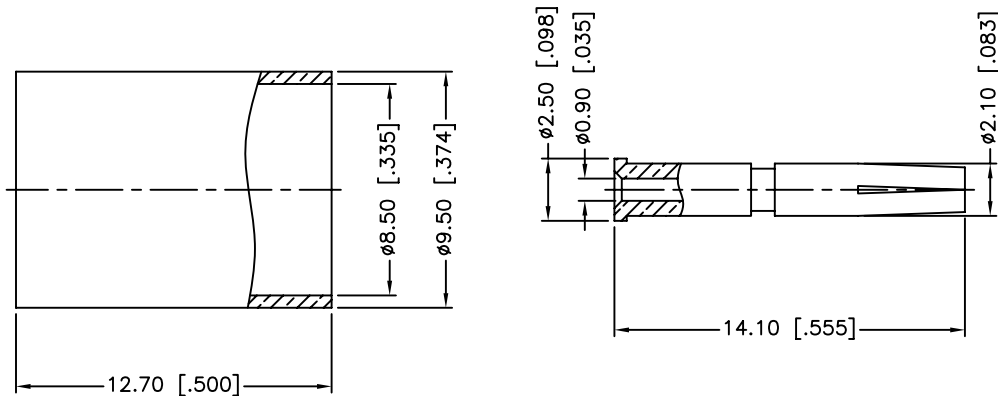

1. CRIMPED FERRULE
HEX CRIMP SIZE .324"
2. CRIMPED CONTACT PIN
HEX CRIMP SIZE .068"

					UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN MILLIMETERS. DIMENSIONS IN [] ARE IN INCHES AND FOR CUSTOMER REFERENCE ONLY. UNLESS OTHERWISE SPECIFIED TOLERANCES FOR MILLIMETERS ARE: 0.5 – 8mm ± 0.20mm 8 – 30mm ± 0.40mm 30 – 120mm ± 0.50mm UNLESS OTHERWISE SPECIFIED TOLERANCES FOR INCHES ARE: .020 – .315 = ± 0.007" .315 – 1.180 = ± 0.015" 1.180 – 4.724 = ± 0.020" DO NOT SCALE DRAWING	APPROVALS		DATE		Amphenol Connex						
DRAWN		M.ZHANG		10/28/10												
CHECKED																
ISSUED						PART DESCRIPTION BNC CRIMP JACK – 75 OHM (FOR BELDEN 8281 CABLE)										
SHEET		1 OF 1														
						PART NO. 112628										
CAD FILE				C:/CONNEX/112628.DWG												
DWG. NO.		112628 .DWG			REV.		A		SIZE		A		SCALE		NA	