


REV.	DATE	DESCRIPTION
NC	04/27/99	INITIAL RELEASE



RECOMMENDED
CABLE STRIPPING DIM'S

DESCRIPTION	MATERIAL	FINISH	UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN MILLIMETERS DIMENSIONS IN [] ARE IN INCHES FOR CUSTOMER REFERENCE ONLY		APPROVALS	DATE	 Connector Corporation						
1 BODY	BRASS	NICKEL	UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN MILLIMETERS DIMENSIONS IN [] ARE IN INCHES FOR CUSTOMER REFERENCE ONLY		DRAWN	G. R. S.	04/27/99	TITLE BNC CRIMP PLUG (FOR BLDEN 88281 PLENUM)					
2 INSULATOR	DELRIIN	NATURAL			CHECKED								
3 CONTACT PIN	BRASS	GOLD			ISSUED								
4 FERRULE	COPPER	NICKEL	UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN MILLIMETERS DIMENSIONS IN [] ARE IN INCHES FOR CUSTOMER REFERENCE ONLY					SIZE	FSCH NO.	DWG. NO.	REV.		
5			30-120 = ± 0.2 6-26 = ± 0.4 120-315 = ± 0.6					A	99001	112625.DWG	NC		
6			315-1000 = ± 1.6										
7			1000-2000 = ± 2.4										
8			DO NOT SCALE DRAWING					SCALE	NA	PART NO.	112625	SHEET	1 OF 1

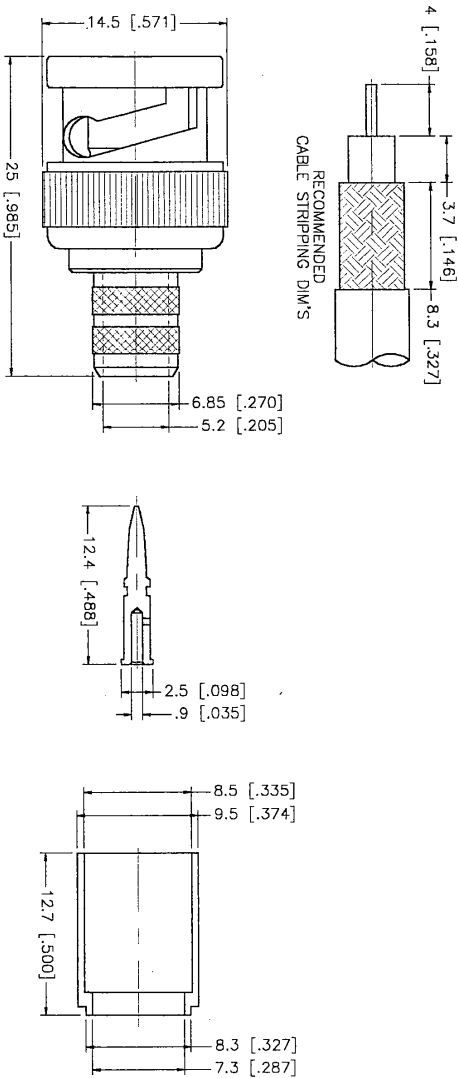

Connector Corporation
BNC CRIMP PLUG
(FOR BELDEN 88281 PLENUM)

99001 112625.DWG NC