

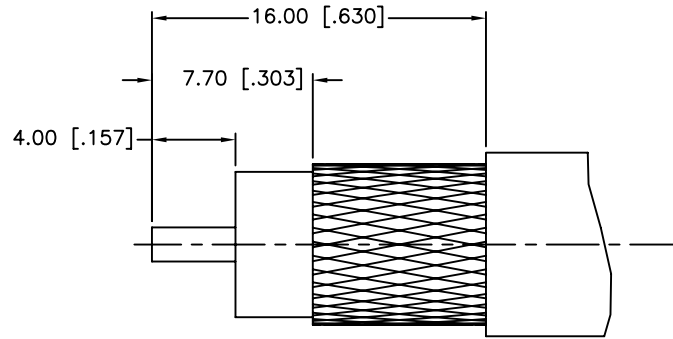
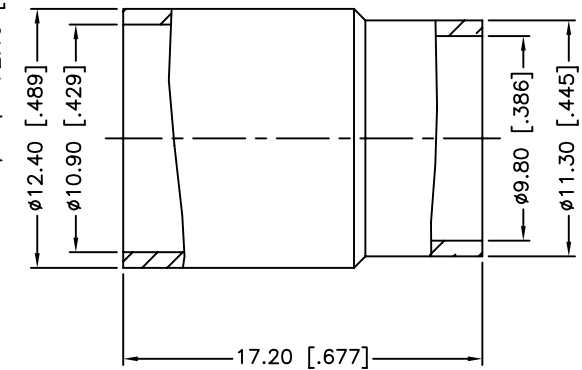
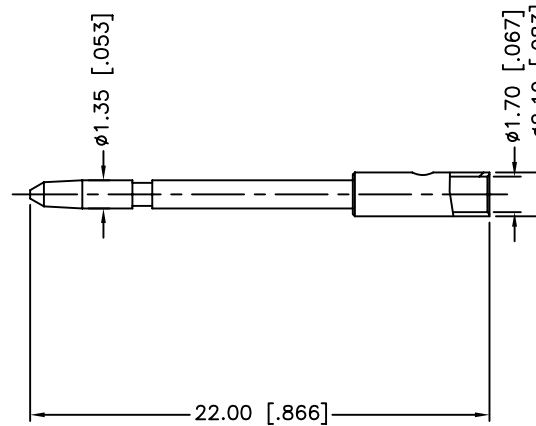


REV.	DATE	ECR NO.	DESCRIPTION
NC	07/07/98	XXXXXX	INITIAL RELEASE
A	07/18/06	XXXXXX	UPDATE DRAWING FORMAT
B	09/08/11	2225	CHANGE THE FERRULE

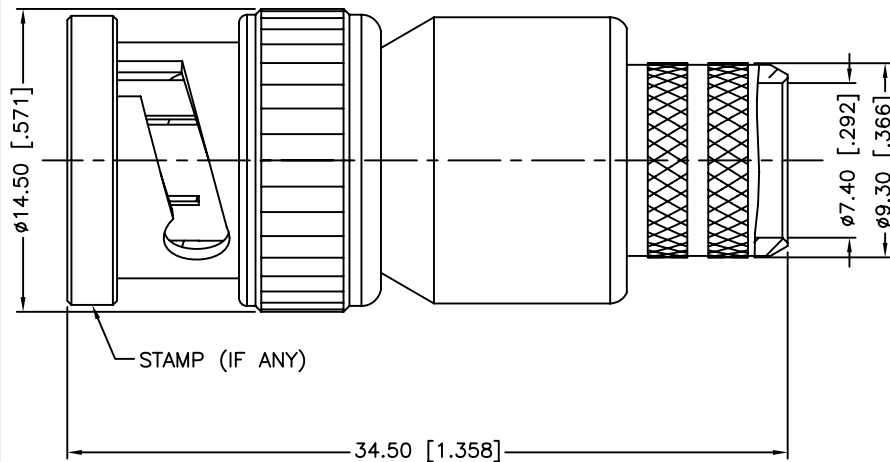

RECOMMENDED
CABLE STRIPPING DIM'S



1. IMPEDANCE: 75 OHM
2. FREQUENCY RANGE: DC - 2 GHz
3. DIELECTRIC WITHSTANDING VOLTAGE: 1500 VRMS MIN.
4. CRIMPED FERRULE
HEX CRIMP SIZE .429"
5. CRIMPED CONTACT PIN
HEX CRIMP SIZE .068"

QTY	DESCRIPTION	MATERIAL	FINISH
1	FERRULE	BRASS	NICKEL
4	CONTACT PIN	BRASS	GOLD
3	INSULATOR	PTFE	NATURAL
2	BODY	BRASS	NICKEL
1	SHELL	BRASS	NICKEL

UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE
IN MILLIMETERS. DIMENSIONS IN [] ARE IN
INCHES AND FOR CUSTOMER REFERENCE ONLY.

UNLESS OTHERWISE SPECIFIED
TOLERANCES FOR MILLIMETERS ARE:
0.5 - 8mm $\pm$ 0.20mm
8 - 30mm $\pm$ 0.40mm
30 - 120mm $\pm$ 0.50mm

UNLESS OTHERWISE SPECIFIED
TOLERANCES FOR INCHES ARE:
.020 - .315 $\pm$ 0.007"
.315 - 1.180 $\pm$ 0.015"
1.180 - 4.724 $\pm$ 0.020"

DO NOT SCALE DRAWING

APPROVALS	DATE
DRAWN M.ZHANG	09/08/11
CHECKED	
ISSUED	
SHEET 1 OF 1	
CAD FILE	C:/CONNEX/112585.DWG

Amphenol Connex

PART DESCRIPTION

BNC CRIMP PLUG - 75 OHM
(FOR BELDEN 89292 CABLE)

PART NO.

112585

DWG. NO. 112585.DWG

REV. B

SIZE A

SCALE NA