


REV.	DATE	DESCRIPTION
NC	11/29/04	INITIAL RELEASE
A	11/13/07	UPDATE PUSH-ON PLUG, CONTACT PIN DIMENSIONS

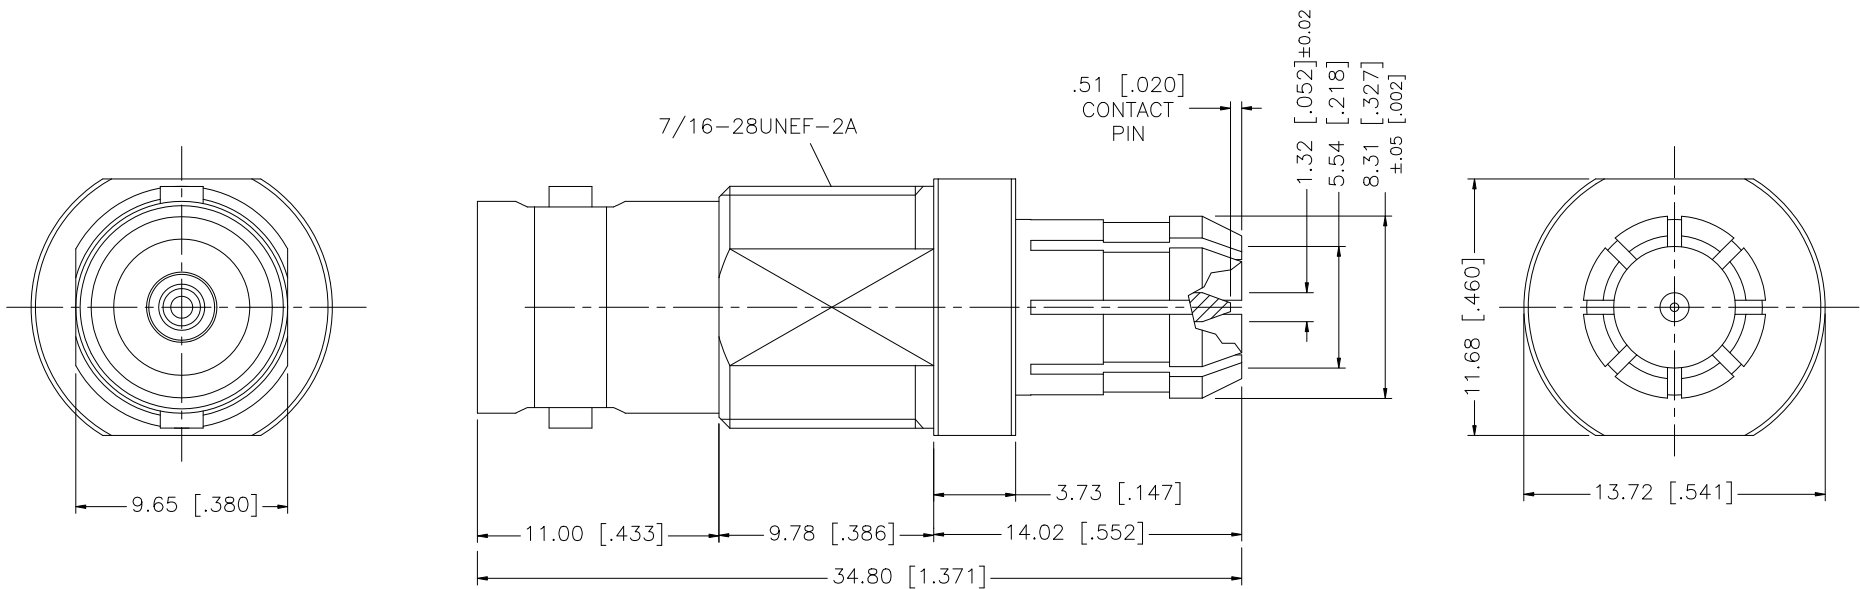

8					UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN MILLIMETERS. DIMENSIONS IN [] ARE IN INCHES AND FOR CUSTOMER REFERENCE ONLY. UNLESS OTHERWISE SPECIFIED TOLERANCES FOR MILLIMETERS ARE: 0.5 – 8mm ± 0.20mm 8 – 30mm ± 0.40mm 30 – 120mm ± 0.50mm UNLESS OTHERWISE SPECIFIED TOLERANCES FOR INCHES ARE: .020 – .315 = ± 0.007” .315 – 1.180 = ± 0.015” 1.180 – 4.724 = ± 0.020” DO NOT SCALE DRAWING	APPROVALS	DATE	Amphenol Connex					
7						DRAWN	G.R.S.						11/13/07
6						CHECKED			PART DESCRIPTION BNC JACK TO BNC PLUG THROUGH ADAPTER				
5						ISSUED							
4						SHEET	1 OF 1		PART NO. 112532–13				
3	CONTACT PIN	BER. COPPER	GOLD	1									
2	INSULATOR	TEFLON	NATURAL	1					DWG. NO. 112532–13.DWG				
1	BODY	BRASS	NICKEL	1		CAD FILE C:/112/112532–13.DWG							
DESCRIPTION					MATERIAL	FINISH	QTY	REV.	A	SIZE	A	SCALE	NA