


REV.	DATE	DESCRIPTION
NC	12/11/07	INITIAL RELEASE

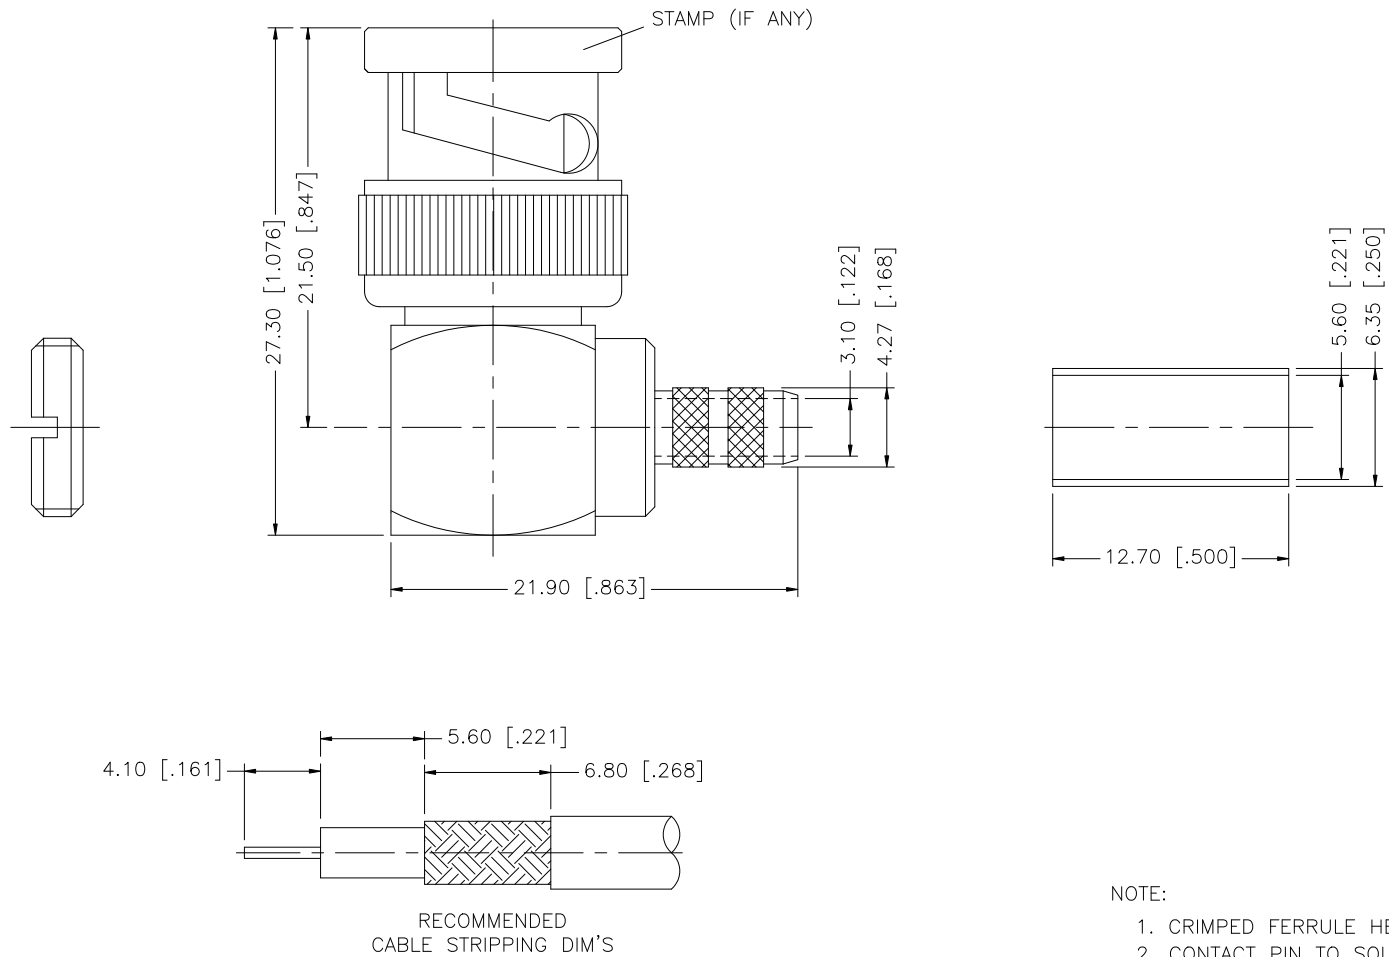

NOTE:

1. CRIMPED FERRULE HEX CRIMP SIZE .213"
2. CONTACT PIN TO SOLDER.

8					UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN MILLIMETERS. DIMENSIONS IN [] ARE IN INCHES AND FOR CUSTOMER REFERENCE ONLY.	APPROVALS		DATE		Amphenol Connex				
7						DRAWN	G.R.S.	12/11/07						
6						CHECKED			PART DESCRIPTION BNC R/A CRIMP PLUG (FOR RG-223/U, 55/U, 142A/U, 400/U)					
5	NUT	BRASS	NICKEL	1	ISSUED									
4	FERRULE	COPPER	NICKEL	1	UNLESS OTHERWISE SPECIFIED TOLERANCES FOR INCHES ARE: .020 - .315 = ± 0.007" .315 - 1.180 = ± 0.015" 1.180 - 4.724 = ± 0.020"	SHEET	1 OF 1	PART NO. 112526T						
3	CONTACT PIN	BRASS	GOLD	1										
2	INSULATOR	TEFLON	NATURAL	1				DWG. NO. 112526T.DWG						
1	SHELL/BODY	BRASS	NICKEL	1	REV. NC									
DESCRIPTION		MATERIAL	FINISH	QTY								DO NOT SCALE DRAWING		CAD FILE C:/112/112526T.DWG