

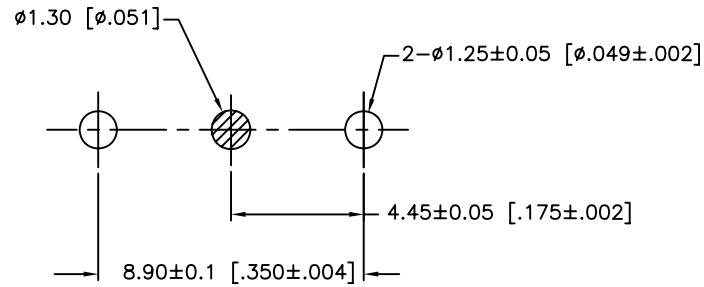


REV.	DATE	ECR NO.	DESCRIPTION
NC	11/09/10	XXXXXX	INITIAL RELEASE

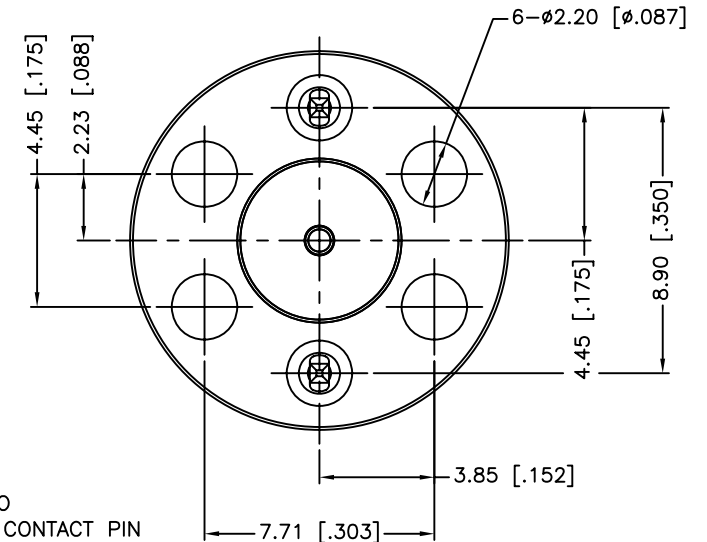

PCB MOUNTING HOLE

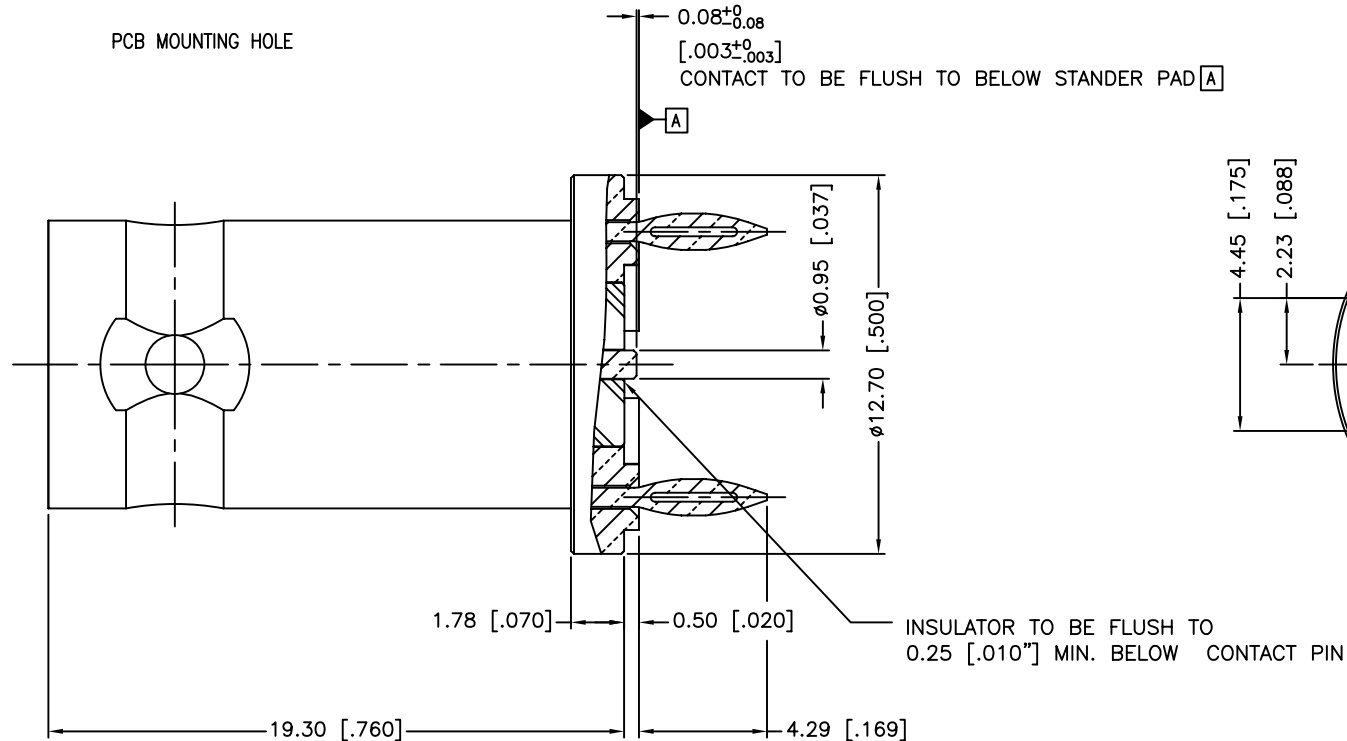

1. FREQUENCY RANGE: 0-3 GHz
2. VSWR: 1.15, MAX.
3. FORCE TO ENGAGE: 40 N MAX.(FOR PCB ASSEMBLY)
4. FORCE TO DISENGAGE: 10 N MIN.(FOR PCB ASSEMBLY)
5. THE PCB BOARD THICKNESS IS 1.4 - 2.3MM

5	LEG	PHOSPHOR BRONZE	GOLD	2
4	LOCK RING	BRASS	GOLD	1
3	CONTACT PIN	PHOSPHOR BRONZE	GOLD	1
2	INSULATOR	PTFE	NATURAL	1
1	BODY	BRASS	GOLD	1
DESCRIPTION	MATERIAL	FINISH	QTY	

UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN MILLIMETERS. DIMENSIONS IN [] ARE IN INCHES AND FOR CUSTOMER REFERENCE ONLY.

UNLESS OTHERWISE SPECIFIED TOLERANCES FOR MILLIMETERS ARE:
0.5 - 8mm ± 0.20mm
8 - 30mm ± 0.40mm
30 - 120mm ± 0.50mm

UNLESS OTHERWISE SPECIFIED TOLERANCES FOR INCHES ARE:
.020 - .315 = ± 0.007"
.315 - 1.180 = ± 0.015"
1.180 - 4.724 = ± 0.020"

DO NOT SCALE DRAWING

APPROVALS	DATE
DRAWN M.ZHANG	11/09/10
CHECKED	
ISSUED	
SHEET 1 OF 1	
CAD FILE C:/CONNEX/112405-10-24.DWG	

Amphenol Connex

PART DESCRIPTION

BNC P.C. MOUNT RECEPT. JACK - 75 ohm
4 LEGS .169" - SURFACE MOUNT CONTACT

PART NO.

112405-10-24

DWG. NO. 112405-10-24.DWG

REV. NC

SIZE A

SCALE NA