


REV.	DATE	ECR NO.	DESCRIPTION
NC	01/24/03	XXXXXX	INITIAL RELEASE
A	08/30/13	2521	UPDATE DRAWING FORMAT

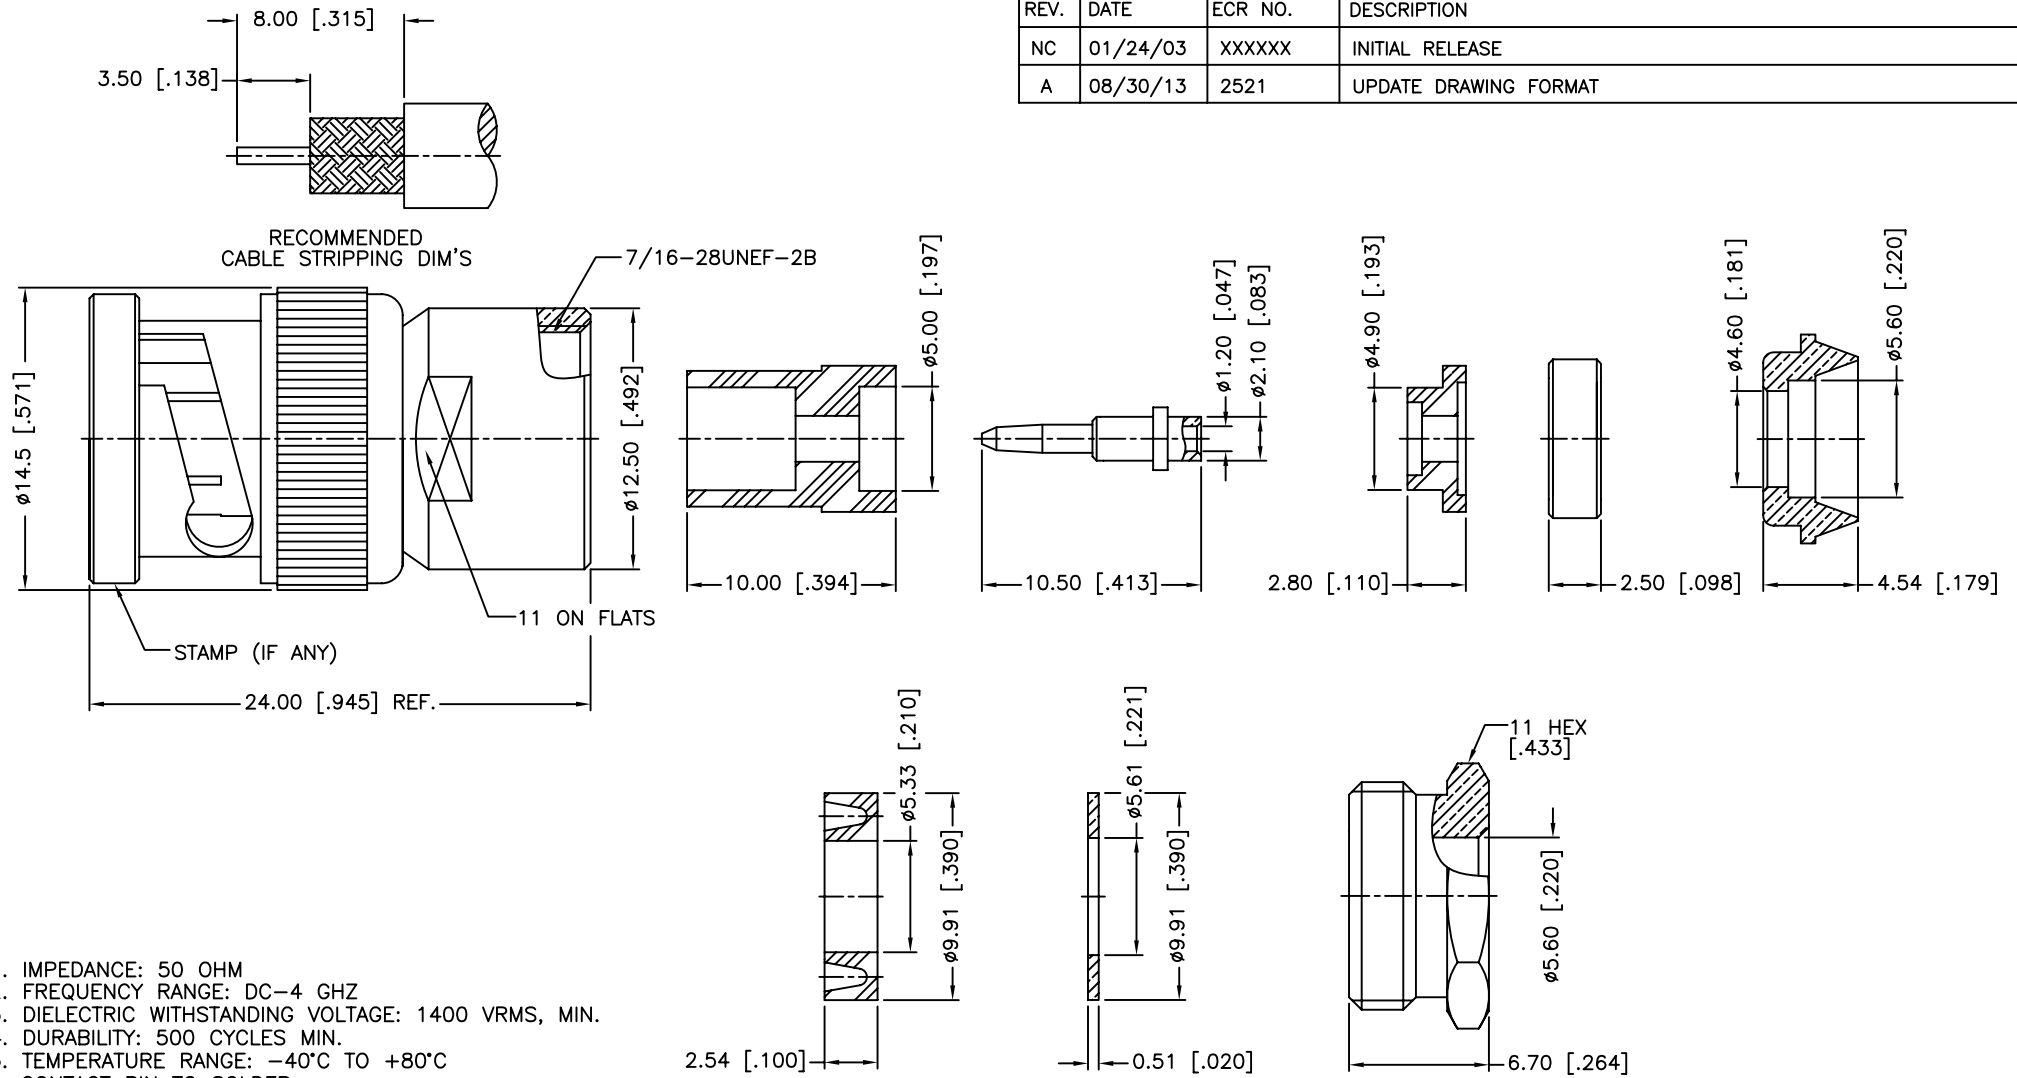

1. IMPEDANCE: 50 OHM
2. FREQUENCY RANGE: DC-4 GHZ
3. DIELECTRIC WITHSTANDING VOLTAGE: 1400 VRMS, MIN.
4. DURABILITY: 500 CYCLES MIN.
5. TEMPERATURE RANGE: -40°C TO +80°C
6. CONTACT PIN TO SOLDER

14	HEX NUT	BRASS	NICKEL	1
13	WASHER	BRASS	NICKEL	1
12	GASKET	RUBBER	RED	1
11	BRAID CLAMP	BRASS	NICKEL	1
10	RING	BRASS	NICKEL	1
9	INSULATOR	PTFE	NATURAL	1
8	CONTACT PIN	BRASS	GOLD	1
7	INSULATOR	PTFE	NATURAL	1
6	WASHER	BRASS	NICKEL	1
5	SPRING	SK5	NICKEL	1
4	RETAINER RING	BRASS	NICKEL	1
3	GASKET	RUBBER	RED	1
2	SHELL	BRASS	NICKEL	1
1	BODY	BRASS	NICKEL	1
	DESCRIPTION	MATERIAL	FINISH	QTY

UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN MILLIMETERS. DIMENSIONS IN [] ARE IN INCHES AND FOR CUSTOMER REFERENCE ONLY.

UNLESS OTHERWISE SPECIFIED TOLERANCES FOR MILLIMETERS ARE:

<0.5 ± 0.05mm
0.5 - 6mm ± 0.10mm
6 - 30mm ± 0.20mm
30 - 120mm ± 0.30mm
ANGLES ± 1°

UNLESS OTHERWISE SPECIFIED TOLERANCES FOR INCHES ARE:

<.020 ± 0.002"
.020 - .236 ± 0.004"
.236 - 1.180 ± 0.007"
1.180 - 4.724 ± 0.012"
ANGLES ± 1°

DO NOT SCALE DRAWING

APPROVALS	DATE
DRAWN M.ZHANG	08/30/13
CHECKED	
ISSUED	
SHEET 1 OF 1	
CAD FILE C:/CONNEX/112332T.DWG	

Amphenol Connex			
PART DESCRIPTION			
BNC CLAMP PLUG (FOR RG-58C/U, 58/U, 142A/U, 223/U CABLE)			
PART NO. 112332T			
DWG. NO. 112332T.DWG	REV. A	SIZE A	SCALE NA