

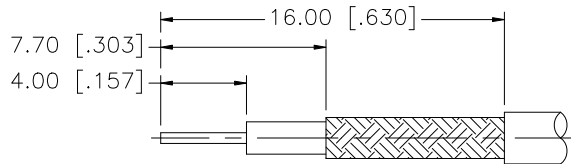
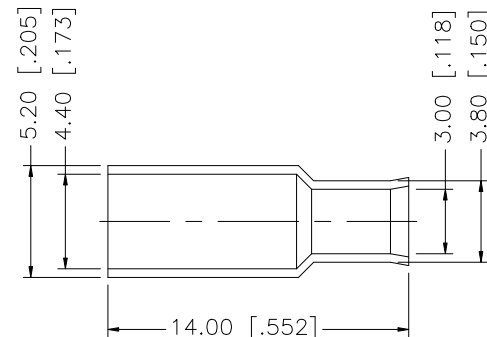


REV.	DATE	DESCRIPTION
NC	12/12/07	INITIAL RELEASE

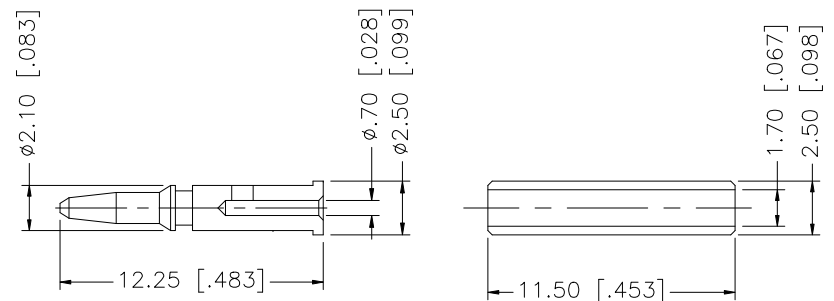

RECOMMENDED
CABLE STRIPPING DIM'S

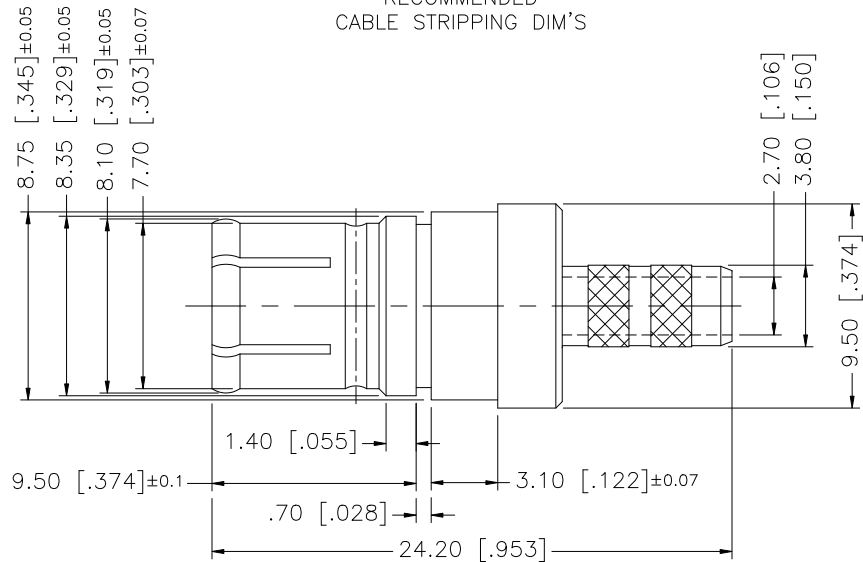

NOTE:

1. CRIMPED FERRULE HEX CRIMP SIZE .178"
2. CRIMPED CONTACT PIN HEX CRIMP SIZE .068"

8					UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN MILLIMETERS. DIMENSIONS IN [] ARE IN INCHES AND FOR CUSTOMER REFERENCE ONLY.	APPROVALS	DATE	Amphenol Connex								
7						DRAWN	G.R.S.								12/12/07	
6					UNLESS OTHERWISE SPECIFIED TOLERANCES FOR MILLIMETERS ARE: 0.5 – 8mm ± 0.20mm 8 – 30mm ± 0.40mm 30 – 120mm ± 0.50mm	CHECKED		PART DESCRIPTION BNC CRIMP PUSH-ON PLUG (FOR RG-316/U CABLE)								
5	FERRULE	COPPER	NICKEL	1		ISSUED										
4	SLEEVE	DELTRIN	NATURAL	1	UNLESS OTHERWISE SPECIFIED TOLERANCES FOR INCHES ARE: .020 – .315 = ± 0.007” .315 – 1.180 = ± 0.015” 1.180 – 4.724 = ± 0.020”	SHEET	1 OF 1	PART NO. 112132-11								
3	CONTACT PIN	BRASS	GOLD	1												
2	INSULATOR	TEFLON	NATURAL	1	DO NOT SCALE DRAWING	CAD FILE	C:/112/112132-11.DWG	DWG. NO.		112132-11.DWG	REV.	NC	SIZE	A	SCALE	NA
1	BODY	BRASS	NICKEL	1												
	DESCRIPTION	MATERIAL	FINISH	QTY												