
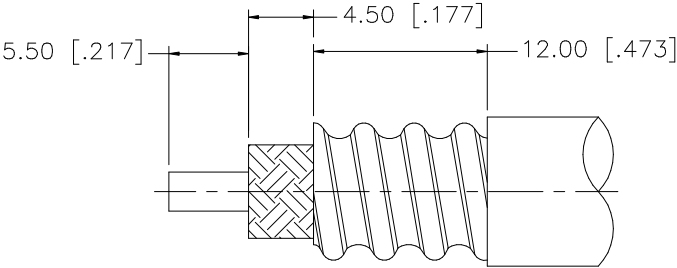


REV.	DATE	DESCRIPTION
NC	10/01/06	INITIAL RELEASE

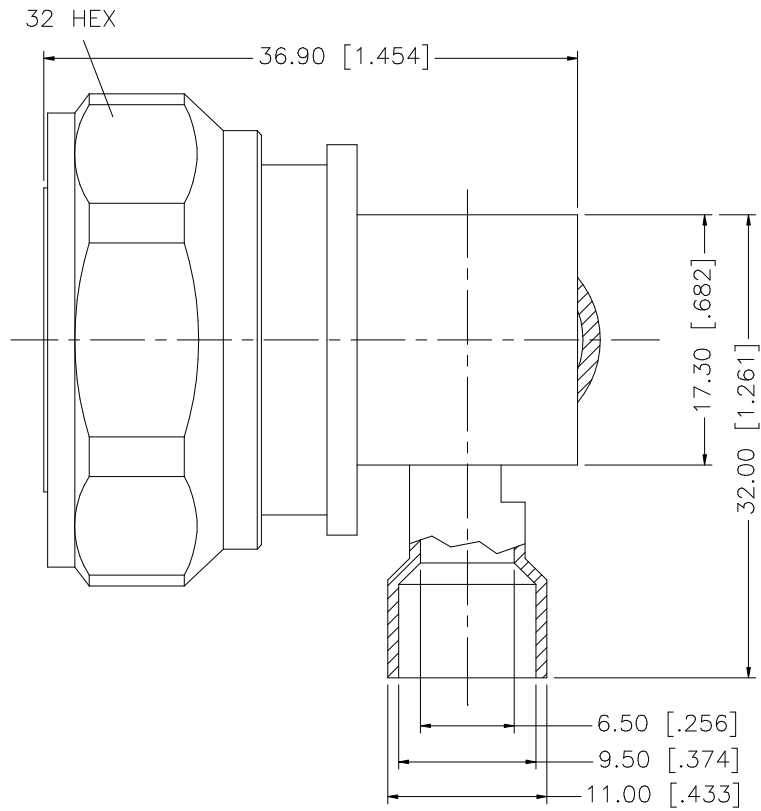

RECOMMENDED
CABLE STRIPPING DIM'S

8					UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN MILLIMETERS. DIMENSIONS IN [] ARE IN INCHES AND FOR CUSTOMER REFERENCE ONLY. UNLESS OTHERWISE SPECIFIED TOLERANCES FOR MILLIMETERS ARE: 0.5 – 8mm ± 0.20mm 8 – 30mm ± 0.40mm 30 – 120mm ± 0.50mm UNLESS OTHERWISE SPECIFIED TOLERANCES FOR INCHES ARE: .020 – .315 = ± 0.007” .315 – 1.180 = ± 0.015” 1.180 – 4.724 = ± 0.020”	APPROVALS		DATE		Amphenol Connex				
7						DRAWN	G.R.S.	10/01/06						
6						CHECKED			PART DESCRIPTION 7/16 R/A PLUG (FOR 1/4” HELICAL, SUPERFLEX CABLE)					
5						ISSUED								
4						SHEET	1 OF 1							
3	CONTACT PIN	BRASS	SILVER	1	DO NOT SCALE DRAWING	CAD FILE		PART NO. 272FPRHI						
2	INSULATOR	TEFLON	NATURAL	1		C:/272/272FPRHI.DWG								
1	BODY	BRASS	NEXCOTE	1				DWG. NO. 272FPRHI.DWG						
	DESCRIPTION	MATERIAL	FINISH	QTY									REV. A	SIZE A