
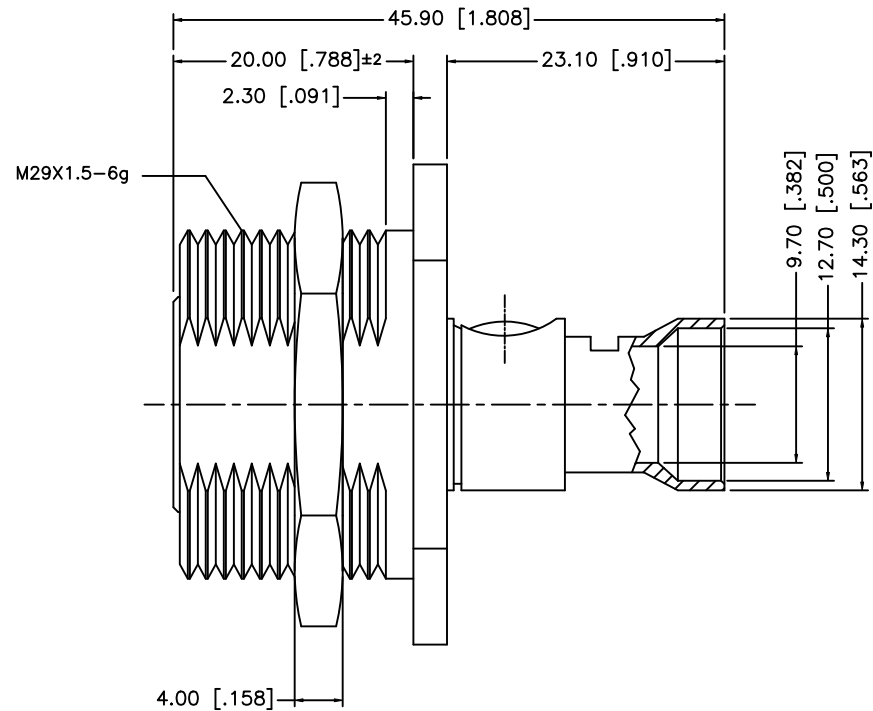


REV.	DATE	ECR NO.	DESCRIPTION
NC	09/19/07	—	INITIAL RELEASE
A	07/31/08	—	REVISE CABLE DESCRIPTION TO "HELICAL"

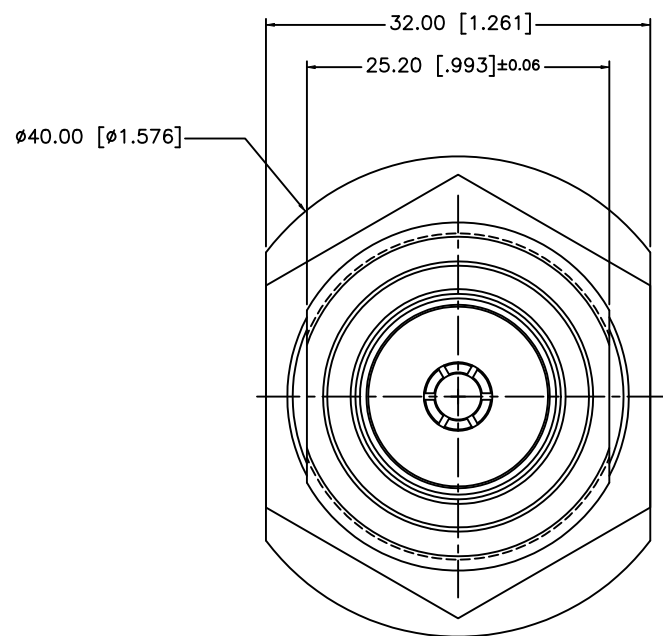

				UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN MILLIMETERS. DIMENSIONS IN [] ARE IN INCHES AND FOR CUSTOMER REFERENCE ONLY. UNLESS OTHERWISE SPECIFIED TOLERANCES FOR MILLIMETERS ARE: 0.5 – 8mm ± 0.20mm 8 – 30mm ± 0.40mm 30 – 120mm ± 0.50mm UNLESS OTHERWISE SPECIFIED TOLERANCES FOR INCHES ARE: .020 – .315 = ± 0.007" .315 – 1.180 = ± 0.015" 1.180 – 4.724 = ± 0.020" DO NOT SCALE DRAWING	APPROVALS		DATE		Amphenol Connex								
8					DRAWN	G.R.S.	07/31/08										
7					CHECKED					PART DESCRIPTION							
6					ISSUED					7/16 BULKHEAD JACK – 3/8” HELICAL CABLE							
5					SHEET	1 OF 1					PART NO.						
4	HEX NUT	BRASS	NEXCOTE	1							272FJBH2						
3	CONTACT PIN	BRASS	GOLD	1							DWG. NO.						
2	INSULATOR	PTFE	NATURAL	1							272FJBH2.DWG						
1	BODY	BRASS	NEXCOTE	1							REV.		NC	SIZE	A	SCALE	NA
DESCRIPTION				MATERIAL	FINISH		QTY	CAD FILE		C:/272/272FJBH2.DWG							