


REV.	DATE	DESCRIPTION
NC	12/22/05	INITIAL RELEASE
A	12/11/07	ADD 16.0 HEX, 15 FLAT, 13.5 FLAT

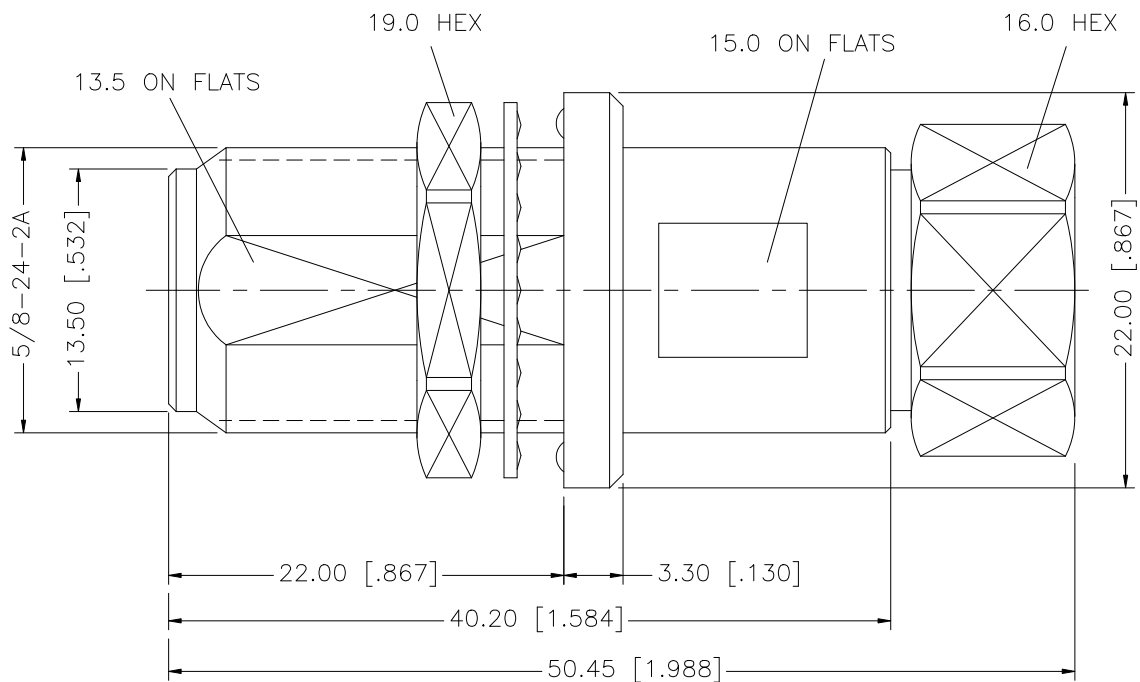

8					UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN MILLIMETERS. DIMENSIONS IN [] ARE IN INCHES AND FOR CUSTOMER REFERENCE ONLY. UNLESS OTHERWISE SPECIFIED TOLERANCES FOR MILLIMETERS ARE: 0.5 – 8mm ± 0.20mm 8 – 30mm ± 0.40mm 30 – 120mm ± 0.50mm UNLESS OTHERWISE SPECIFIED TOLERANCES FOR INCHES ARE: .020 – .315 = ± 0.007” .315 – 1.180 = ± 0.015” 1.180 – 4.724 = ± 0.020” DO NOT SCALE DRAWING	APPROVALS	DATE	Amphenol Connex N BULKHEAD JACK (FOR 1/4” SUPERFLEX/FSJ CABLE)					
7						DRAWN	G.R.S.						12/11/07
6	HEX NUT	PHOS. BRONZE	NEXCOTE	1		CHECKED							
5	LOCK WASHER	PHOS. BRONZE	NEXCOTE	1		ISSUED			PART DESCRIPTION				
4	O–RING	SILICONE	RUBBER	1		SHEET	1 OF 1						
3	CONTACT PIN	BER. COPPER	GOLD	1					PART NO.				
2	INSULATOR	TEFLON	NATURAL	1									
1	BODY	BRASS	NEXCOTE	1					172FJBH1				
DESCRIPTION		MATERIAL	FINISH	QTY		CAD FILE							
						C:/172/172FJBH1.DWG			DWG. NO.	172FJBH1.DWG	REV. A	SIZE A	SCALE NA