


NOTES:

1. MATERIALS AND FINISHES
BODY - BRASS, GOLD PLATING
CONTACT - BERYLLIUM COPPER, GOLD PLATING
INSULATOR - PTFE
2. ELECTRICAL:
A. IMPEDANCE: 50 OHM
B. FREQUENCY RANGE: DC 0-4 GHz
C. DIELECTRIC WITHSTANDING VOLTAGE: 500 VRMS, MIN.
3. MECHANICAL:
A. DURABILITY: 500 CYCLES MIN.
4. CRIMPED FERRULE
HEX CRIMP SIZE .128"
5. CONTACT PIN TO SOLDER




THIRD ANGLE PROJ.

REVISIONS

REV	DESCRIPTION	DATE	ECO	APPR
C	SEE SHEET 1	09-0ct-02	---	TONY
D	REDRAWN TO UPDATE FORMAT		47310	

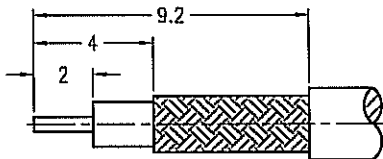

RECOMMENDED
CABLE STRIPPING DIM'S

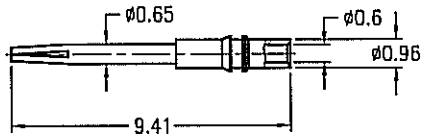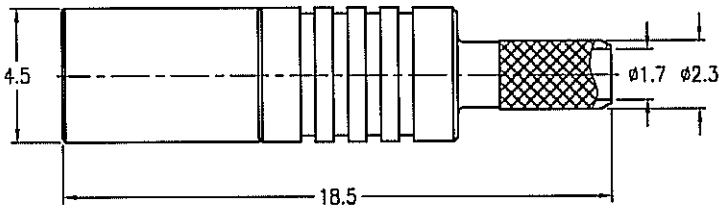

CUSTOMER OUTLINE DRAWING

ALL OTHER SHEETS ARE FOR INTERNAL USE ONLY

UNLESS OTHERWISE SPECIFIED, DIMENSIONS ARE IN METRIC AND TOLERANCES ARE:
0.5 - 6mm ±0.1mm
6 - 30mm ±0.2mm
30 - 120mm ±0.3mm
ANGLES ±1°

NOTICE - These drawings, specifications, or other data (1) are, and remain the property of Amphenol Corp. (2) must be returned upon request; and (3) are confidential and not to be disclosed to any person other than those to whom they are given by Amphenol Corp. The furnishing of these drawings, specifications, or other data by Amphenol Corp., or to any other person to anyone for any purpose is not to be regarded by implication or otherwise in any manner licensing, granting rights or permitting such holder or any other person to manufacture, use or sell any product, process or design, patented or otherwise, that may in any way be related to or disclosed by said drawings, specifications, or other data.

MATERIAL

REFERENCE

FINISH

DRAWN N.CAO	DATE 08-Aug-03
ENGINEER N.CAO	DATE 08-Aug-03
APPROVED TONY	DATE 08-Aug-03
CAD FILE F:\DWG\SSMB\6121A1\316U-50\3GT30G-DSZ	

TITLE
SSMB CRIMP PLUG
(FOR RG-174/U,188A/U,
316/U)

SCALE: 4/1	SHEET 2 OF 2
DWG SIZE B	CODE ID 74868
REV D	

Amphenol RF Danbury CT USA, Tainan Taiwan, Shenzhen China www.amphenolrf.com
DRAWING NO. SSMB6121A1-3GT30G-316U-50
ITEM NO. 156121AAA36GE5F
PART NO. 904-110P-51SX