


NOTES:
1. MATERIALS AND FINISHES:
BODY - BRASS, NICKEL PLATING
CONTACT PIN - PHOSPHOR BRONZE, GOLD PLATING
INSULATOR - PTFE,NATURAL
2. ELECTRICAL:
A. IMPEDANCE: 50 OHM
B. FREQUENCY RANGE: DC 0-4 GHz
C. DIELECTRIC WITHSTANDING VOLTAGE: 1500 VRMS, MIN.
3. MECHANICAL:
A. DURABILITY: 500 CYCLES MIN.
B. TEMPERATURE RANGE: -65° C to +165° C
4. CRIMPED CONTACT PIN
HEX CRIMP SIZE .068"

THIRD ANGLE PROJ.

REVDESCRIPTIONDATEECOAPPR

ARELEASE TO MFG.20-Feb-1248813MZ

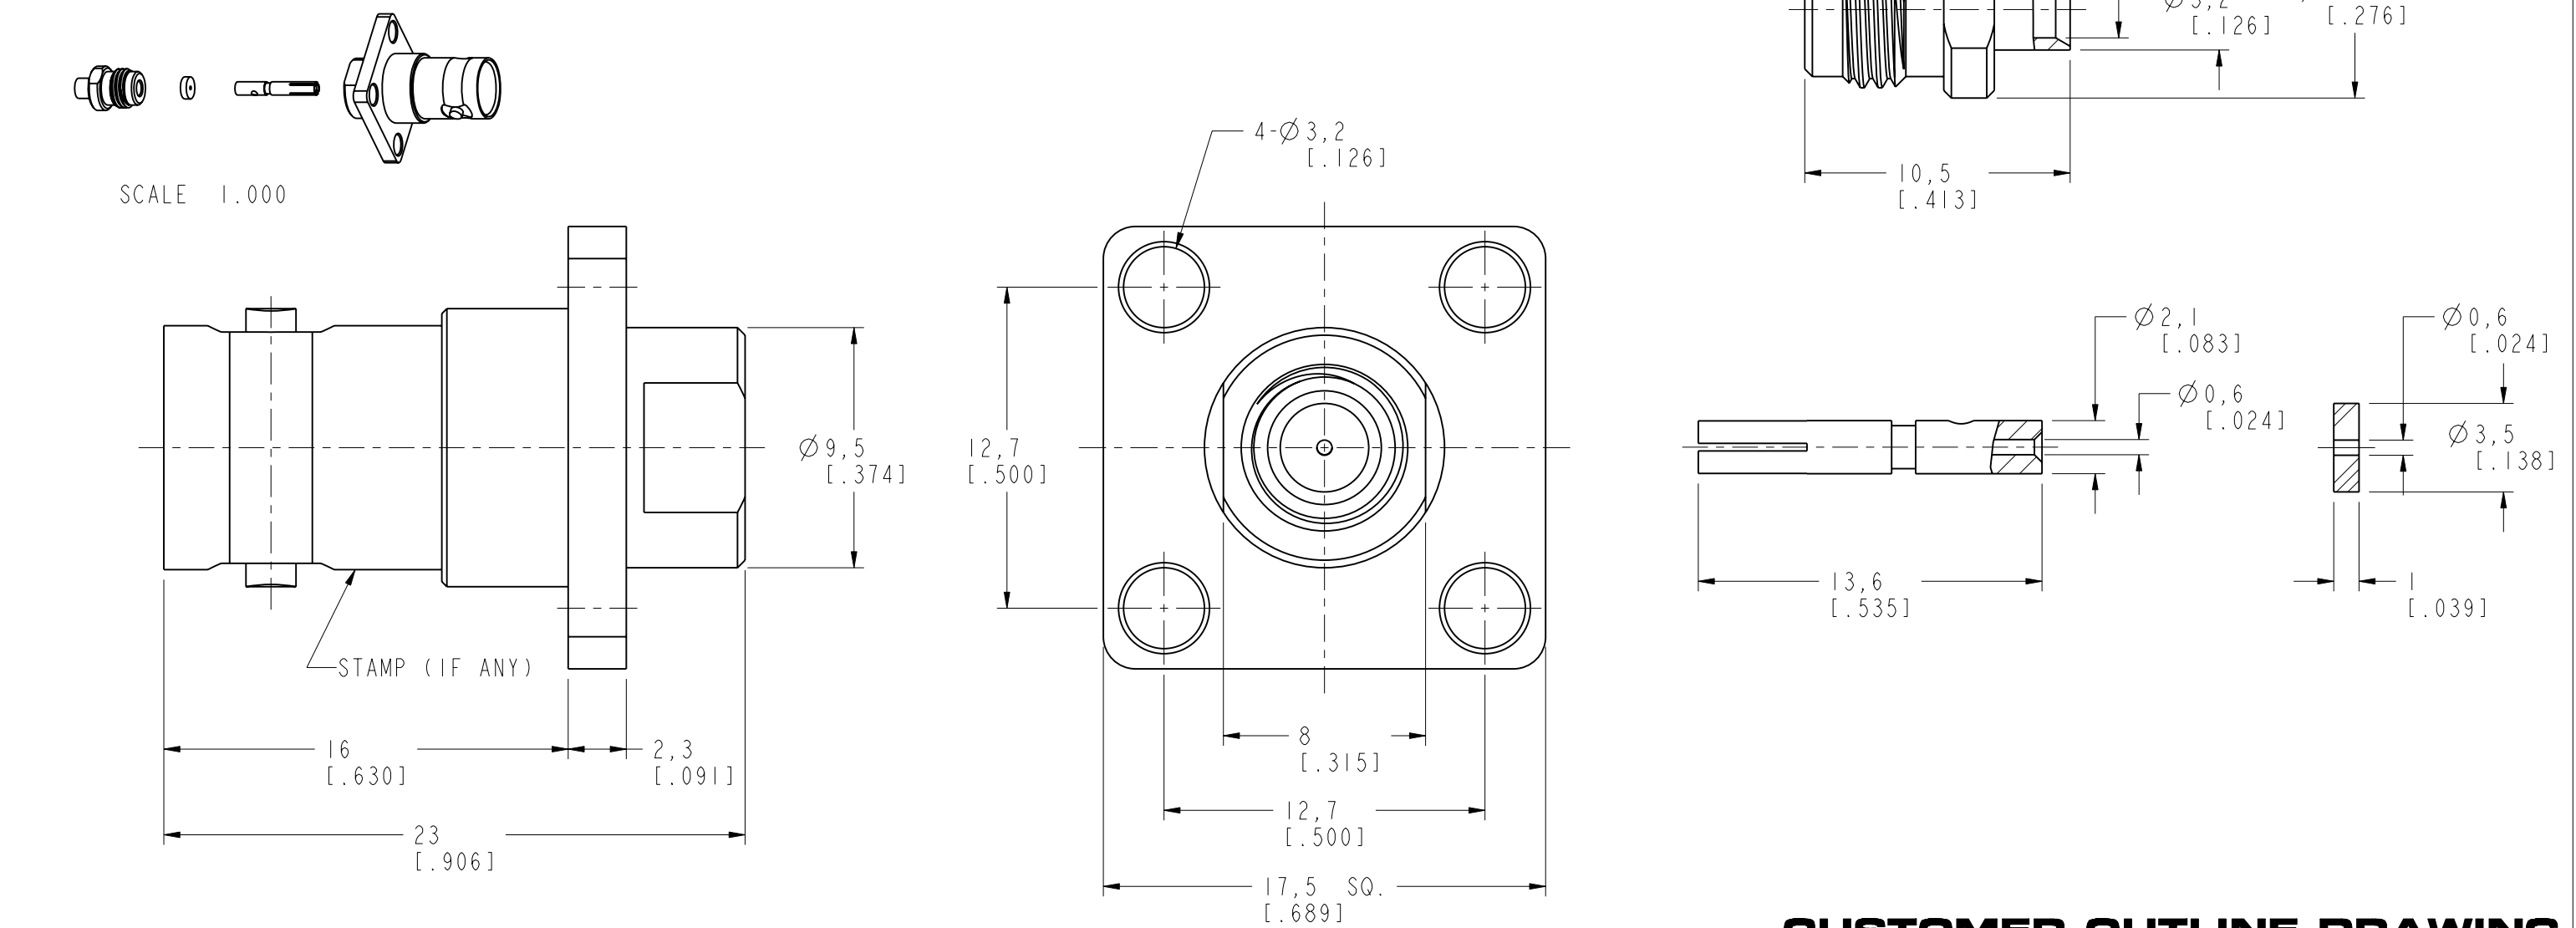

UNLESS OTHERWISE SPECIFIED, DIMENSIONS ARE IN METRIC AND TOLERANCES ARE: <0.5mm ± 0.05mm 0.5 - 6mm ± 0.1mm 6 - 30mm ± 0.2mm 30 - 120mm ± 0.3mm ANGLES ± 1° NOTICE - These drawings, specifications, or other data (1) are, and remain the property of Amphenol corp. (2) must be returned upon request; and (3) are confidential and not to be disclosed to any person other than those to whom they are given by Amphenol Corp. the furnishing of these drawings, specifications, or other data by Amphenol Corp., or to any other person to anyone for any purpose is not to be regarded by implication or otherwise in any manner licensing, granting rights to permitting such holder or any other person to manufacture, use or sell any product, process or design, patented or otherwise, that may in any way be related to or disclosed by said drawings, specifications, or other data.	MATERIAL	DRAWN M.ZHANG	DATE 20-Feb-12	TITLE BNC PANEL DIRECT SOLDER JACK (FOR .085", .086" CABLE) SCALE: 4.0:1.0 SHEET 2 OF 2 DWG SIZE B	REV A	Amphenol RF Danbury CT USA, Tainan, Taiwan, Shenzhen, China www.amphenolrf.com DRAWING NO.B6581A1-NX3GT30G-085-50 ITEM NO. 016581AAA45NP5F PART NO. 31-6514
	-	ENGINEER S.LI	DATE 20-Feb-12			
	REFERENCE CONNEX PN: 112616-10	APPROVED S.HSIEH	DATE 20-Feb-12			
	CONFIGURATION LEVEL:	CAD FILE				
	FINISH	I:\BNC\B6581A1-NX3GT30G-085-50				